

RoHS Compliant Product

A suffix of "-C" specifies halogen-free




R-1

● FEATURES

- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability
- High Speed Switching

● MECHANICAL DATA

- Case: Molded Plastic
- Epoxy: UL 94V-0 Rate Flame Retardant
- Lead: Axial Lead, Solder Able per MIL-STD-202, Method 208 Guaranteed
- Polarity: Color Band Denotes Cathode End
- Mounting Position: Any
- Weight: 0.19 grams

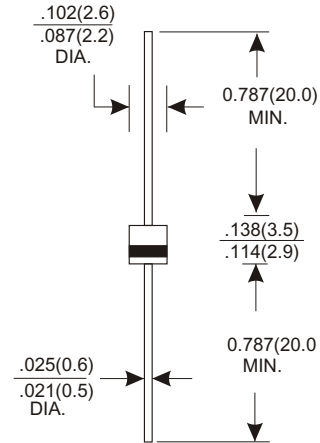

Dimensions in inches and (millimeters)

● MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	HER101R1	HER102R1	HER103R1	HER104R1	HER105R1	HER106R1	HER107R1	HER108R1	UNITS
Maximum Recurrent Peak Reverse Voltage	50	100	200	300	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	210	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	300	400	600	800	1000	V
Maximum Average Forward Rectified Current, .375" (9.5mm) Lead Length at Ta = 55 °C	1.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC method)	25								A
Maximum Instantaneous Forward Voltage at 1.0A	1.0				1.3	1.7			V
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta = 100 °C					5.0				µA
					100				
Maximum Reverse Recovery Time (Note 1)					50	75			ns
Typical Junction Capacitance (Note2)					20	15			pF
Operating Temperature Range T _J	-65 ~ +150								°C
Storage Temperature Range T _{STG}	-65 ~ +150								°C

NOTES:

1. Reverse Recovery Time Test Condition: I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A
2. Measured at 1MHz and Applied Reverse Voltage of 4.0V D.C.

● RATING AND CHARACTERISTIC CURVES (HER101R1 THRU HER108R1)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

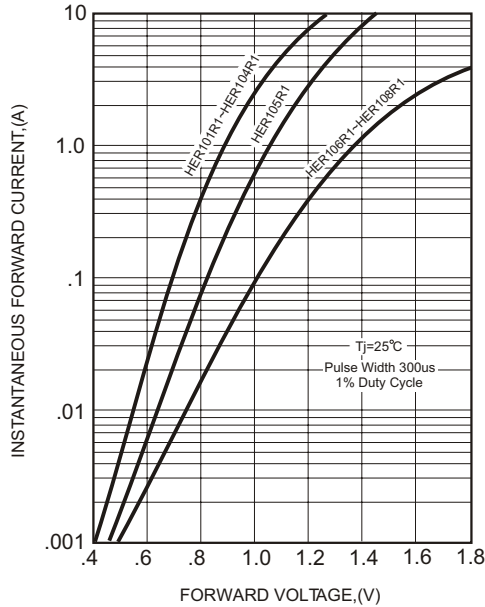


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

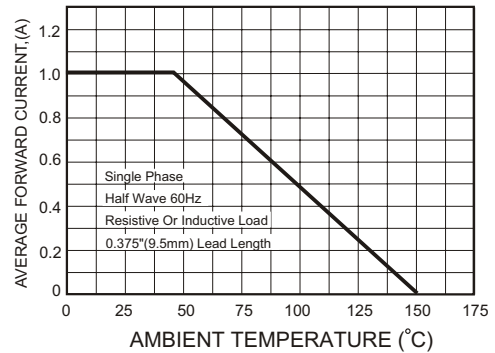


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


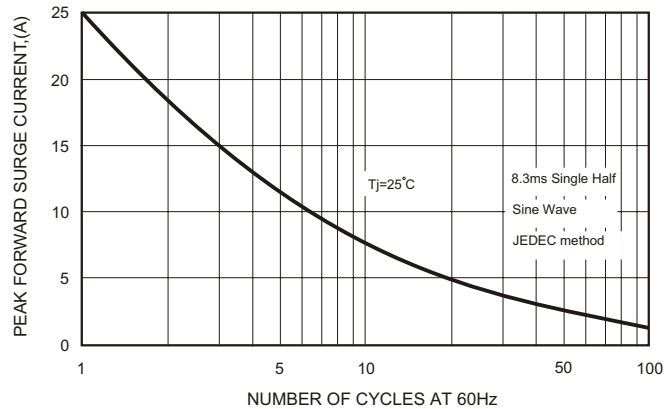


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

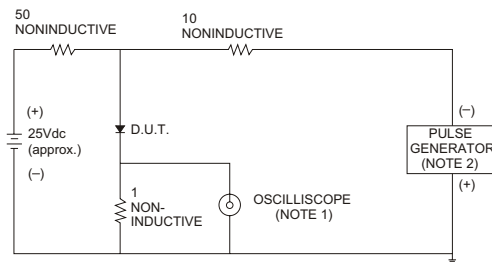

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm.22pF.

2. Rise Time= 10ns max., Source Impedance= 50 ohms.

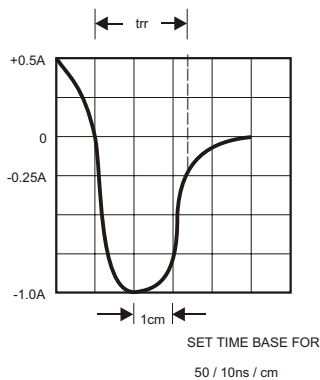


FIG.5-TYPICAL JUNCTION CAPACITANCE

