

TECHNICAL DESCRIPTION

FEATURES

- 740 - 960 MHz
- LOW LOSS
- HIGH ISOLATION
- EXCELLENT PHASE/AMPLITUDE BALANCE
- SURFACE MOUNT
- TAPE & REEL AVAILABLE

APPLICATIONS

- GSM 850 RF SUBSYSTEMS
- GSM 950 RF SUBSYSTEMS
- LAND MOBILE RADIO (LMR)
- RADAR COMMUNICATIONS
- HOMELAND SECURITY NETWORKS
- PUBLIC SAFETY BTS AMPLIFIER




The Multi-Mix® QHDZ series provides a 3 dB 90° coupling with low insertion loss, low VSWR, and high isolation. Accurate phase and amplitude balance make this series ideal for use in IQ networks, power amplifiers, radio transceivers, receiver multicouplers and RF signal distribution and processing equipment.

QHDZ quad hybrids are fusion bonded multilayer stripline devices. The fusion bonding process yields a homogeneous monolithic dielectric structure with reliability, ruggedness, and electrical performance that is superior to conventional adhesive bonding techniques.

GENERAL SPECIFICATIONS

FREQUENCY RANGE MHz		INSERTION LOSS (dB MAX)	AMPLITUDE BALANCE (dB MAX)	PHASE BALANCE
740 - 960		0.20	± 0.30	90 ± 2°
ISOLATION (dB MIN)	VSWR (MAX, ALL PORTS)	INPUT POWER (CW @ 1.2:1 LOAD VSWR)	RF INTERFACE	OPERATING TEMPERATURE
25	1.12:1	225 WATTS	Leadless Surface Mount	-55° - +95° C

PACKAGE OUTLINE / TAPE & REEL ORIENTATION




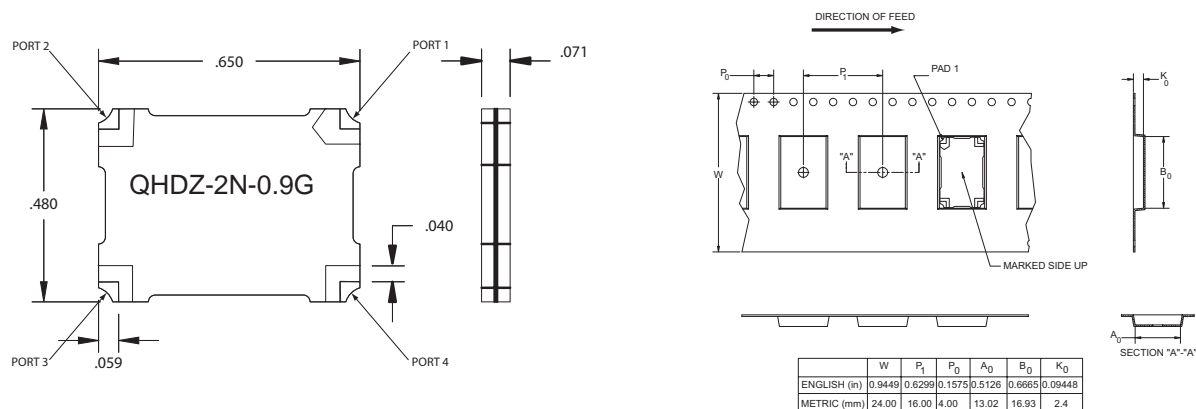


THE MULTI-MIX MICROTECHNOLOGY® GROUP IS ISO 9001:2000 REGISTERED




U.S. Patent 6,099,677 and other Patents Pending.

TYPICAL PERFORMANCE

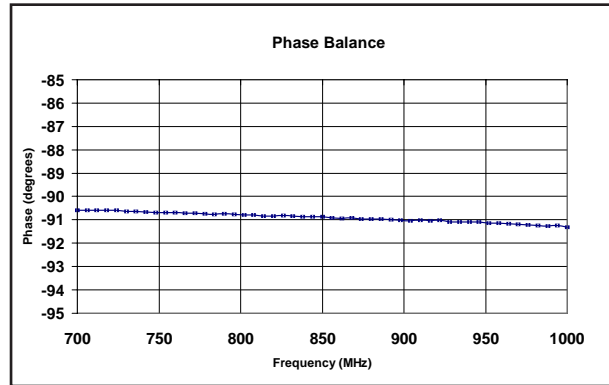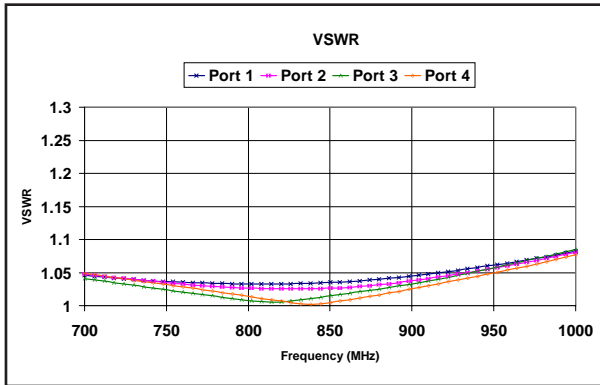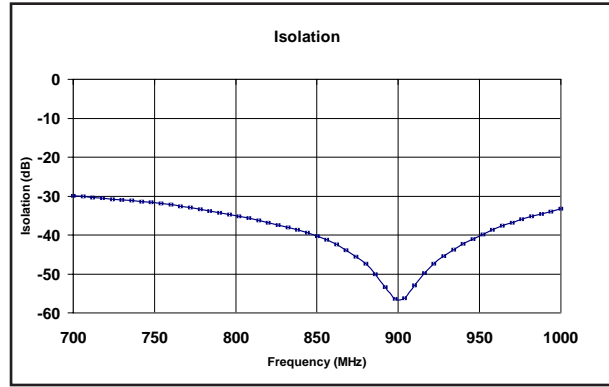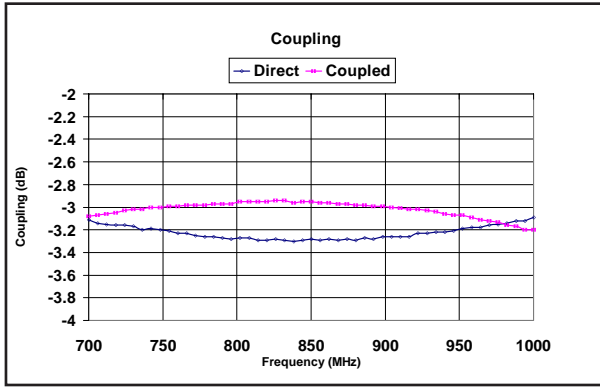

MOUNTING CONFIGURATION

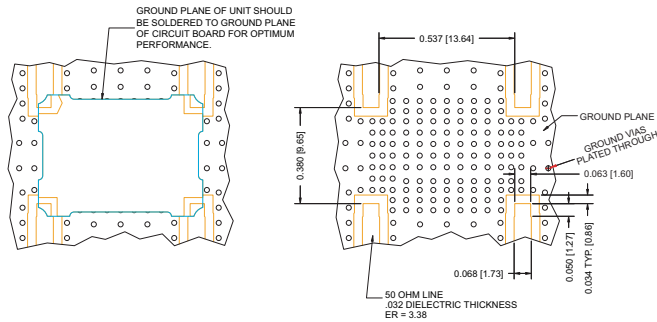

TRUTH TABLE

	1	2	3	4
1	Input	Iso	-90°	0°
2	Iso	Input	0°	-90°
3	-90°	0°	Input	Iso
4	0°	-90°	Iso	Input