


# 2.54 x 2.54mm DUAL ROW HEADER

## EASY BREAKABLE R/A DIP TYPE

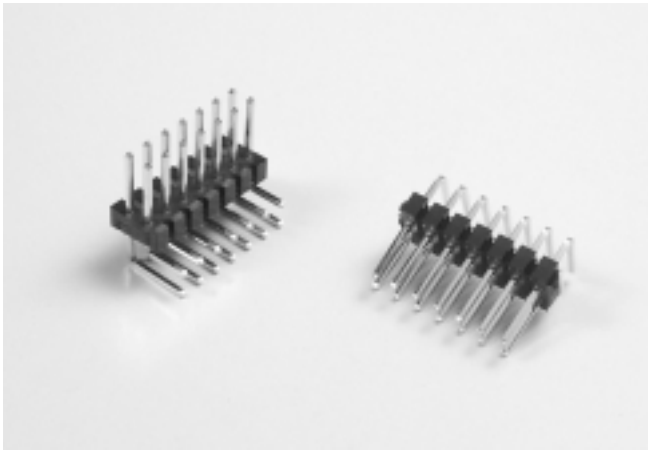


### 254322MR Series

Mates With SUYIN 254100, 254900, 254901, 254906 Series

#### Specifications:

- **4~50 Circuits**
- **Insulator Material** : P.B.T UL 94V-0
- **Operating Type Range** : -40°C To +105°C
- **Terminal Material** : Brass
- **Platings** : Gold or Tin Plated
- **Max. Current Rating** : 1.5A
- **Max. Voltage Rating** : 250V AC
- **Dielectric Strength** : 500V AC (Min. 60 Seconds)

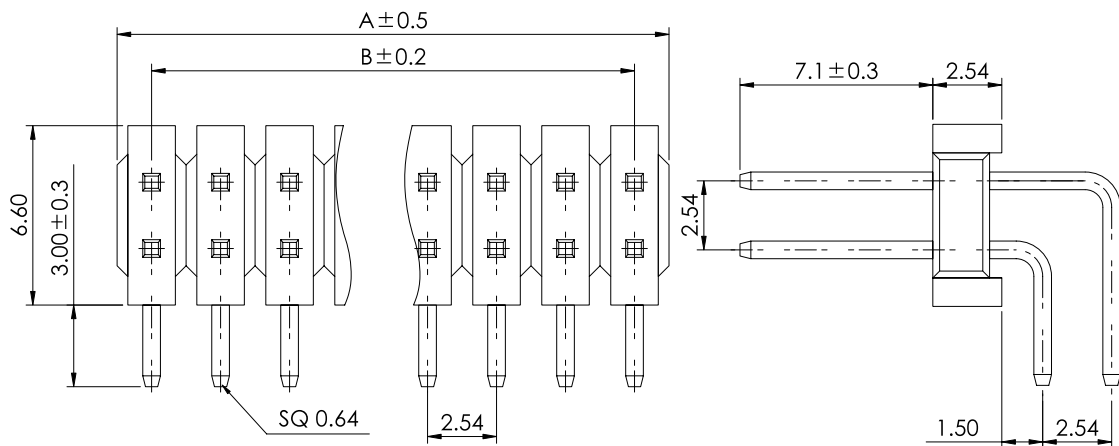

2.54  
mm

### Order Information


254322MR□□□□00ZU  
1 2 3 4 5

1. 'R' : Right Angle DIP Type
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package

'U' : Tube Package Without CAP

Reference Page 11

### Recommended P.C.B. Layout

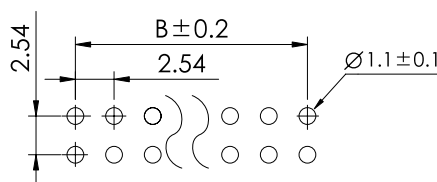

### Dimension Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
254322MR004□□□00ZU	5.08	2.54	254322MR028□□□00ZU	35.56	33.02
254322MR006□□□00ZU	7.62	5.08	254322MR030□□□00ZU	38.10	35.56
254322MR008□□□00ZU	10.16	7.62	254322MR032□□□00ZU	40.64	38.10
254322MR010□□□00ZU	12.70	10.16	254322MR034□□□00ZU	43.18	40.64
254322MR012□□□00ZU	15.24	12.70	254322MR036□□□00ZU	45.72	43.18
254322MR014□□□00ZU	17.78	15.24	254322MR038□□□00ZU	48.26	45.72
254322MR016□□□00ZU	20.32	17.78	254322MR040□□□00ZU	50.80	48.26
254322MR018□□□00ZU	22.86	20.32	254322MR042□□□00ZU	53.34	50.80
254322MR020□□□00ZU	25.40	22.86	254322MR044□□□00ZU	55.88	53.34
254322MR022□□□00ZU	27.94	25.40	254322MR046□□□00ZU	58.42	55.88
254322MR024□□□00ZU	30.48	27.94	254322MR048□□□00ZU	60.96	58.42
254322MR026□□□00ZU	33.02	30.48	254322MR050□□□00ZU	63.50	60.96