


Product SKU:	C2065.21.01
	Hook-Up Wire, UL 1007, UL 1569, CSA TR-64, Gauge Size (AWG): 16, Conductor/Strands: 26/30, Jacket: Premium Grade PVC, Temperature Range: -20°C to +105°C - Black - 1000 Ft. Spool
Product Category:	Electronics - Hook-Up Wire - UL 1007, UL 1569, CSA TR-64 - STRANDED CONDUCTORS - Black

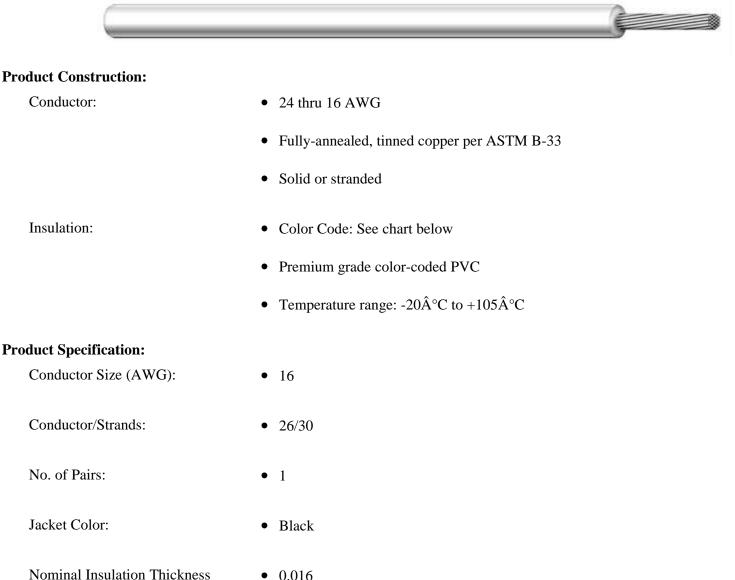

(in):	•	0.010
Nominal Insulation Thickness (mm):	•	0.40
Nominal Outside Diameter (in):	•	0.092

Nominal Outside Diameter	٠	2.34
(mm):		

Standard Packaging:	•	1000' Spool
---------------------	---	-------------

Standard Package Quantity:	• 1
UPC #:	• 079407767359
Put-up:	• 1000
SCC-14:	• 50079407767355
Cube:	• 277.0596
Weight Per Unit of Measure:	• .0105
ColorOption:	• Black
Product Information:	
Applications:	• Internal wiring of electrical and electronic equipment
	• Internal wiring of panels and meters
	• Point-to-point wiring
	• Suggested voltage rating: 300 Volts
Compliances:	• CSA TR-64 - 90°C, 300V
	• Designed to Meet UL VW-1 Vertical Wire Flame Test
	• UL Style 1007 - 80°C, 300V
	• UL Style 1569 - 105°C, 300V
Packaging:	• 10,000 foot (3048m) Reels
	• 1000' (305m) Spools
	• Other put-ups available- consult Customer Service

Reference Charts

Color Code Chart

Technical Specifications

Unit Conversion Factors Cable Design Equations - Balanced Pair Insulation and Jacket Properties Temperature Conversion Chart Decimal and Unit Conversion Factors Cable Design Equations - Braid Shield AWG Conductor Chart Conduit Capacity Chart Cable Design Equations - Coaxial Cable Engineering Prefixes Coax Connector Cross Reference Glossary







