


- Optimized for Ubicom's IP2022 Internet Processor
- Complies with or exceeds IEEE 802.3, 10Base-T Standards
- Robust construction allows for IR/VP processes
- 1500 Vrms Isolation

### Electrical Parameters @ 25° C


Cut-off Frequency (MHz Typ.)	Insertion Loss (dB Max.)	Return Loss (dB Min.)	Attenuation (dB Min.)		Crosstalk (dB Min.)
			@30 MHz		
	5-10 MHz	5-10 MHz	Xmit	Rcv	1-10 MHz
17	-1	-17	-27	-18	-30

• Cable Side Impedance : 100 Ω •

### Schematic

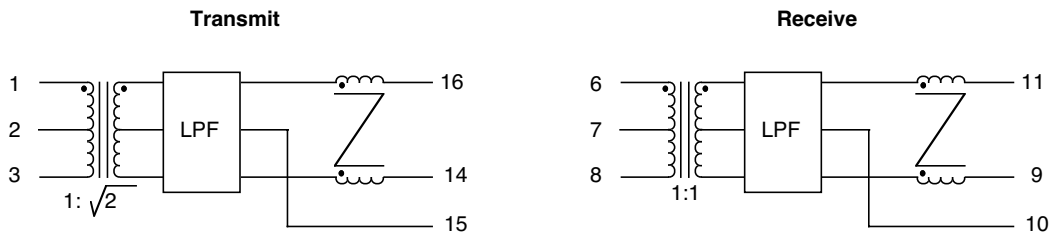

### Package

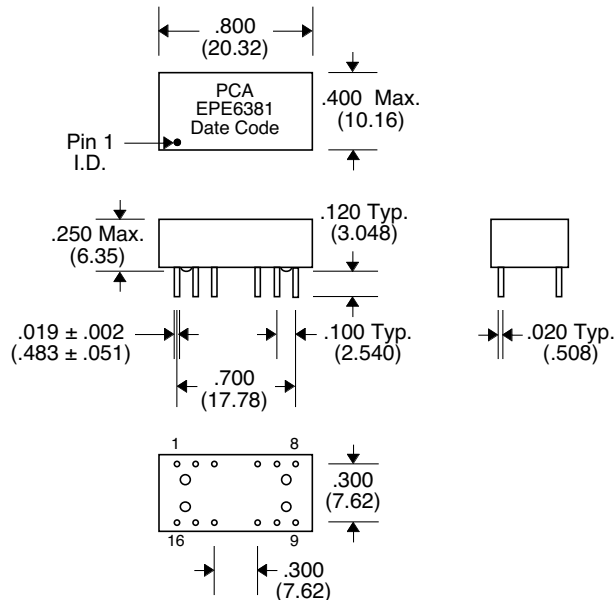

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25