


# Schottky MiniMod FST80150

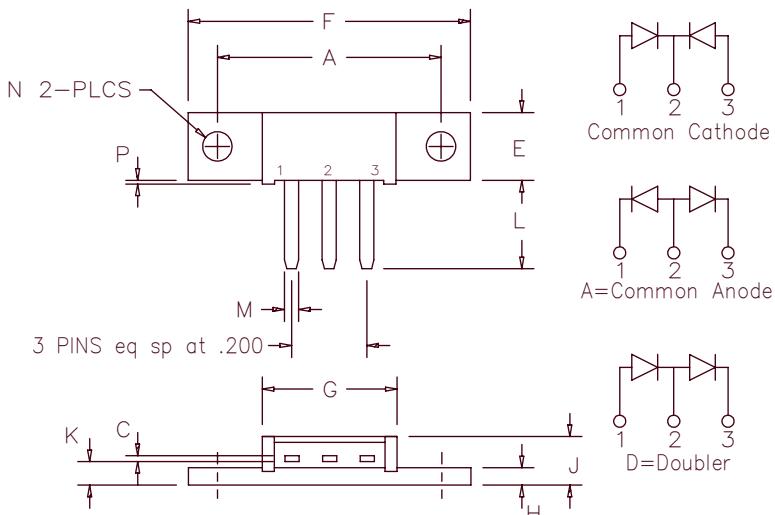

| Dim. | Inches  |         | Millimeter |         | Notes |
|------|---------|---------|------------|---------|-------|
|      | Minimum | Maximum | Minimum    | Maximum |       |
| A    | 1.180   | 1.195   | 29.97      | 30.35   |       |
| C    | .027    | .037    | 0.69       | 0.94    |       |
| E    | .350    | .370    | 8.89       | 9.40    |       |
| F    | 1.490   | 1.510   | 37.85      | 38.35   |       |
| G    | .695    | .715    | 17.65      | 18.16   |       |
| H    | .088    | .098    | 2.24       | 2.49    |       |
| J    | .240    | .260    | 6.10       | 6.60    |       |
| K    | .115    | .135    | 2.92       | 3.43    |       |
| L    | .460    | .480    | 11.68      | 12.19   |       |
| M    | .065    | .085    | 1.65       | 2.16    |       |
| N    | .151    | .161    | 3.84       | 4.09    |       |
| P    | .015    | .025    | 0.38       | 0.64    | Dia.  |

Microsemi Catalog Number      Industry Part Number

Working Peak Reverse Voltage      Repetitive Peak Reverse Voltage

FST80150\*      89CNQ150A

150V

150V

- Schottky Barrier Rectifier
- Guard ring protection
- 2X40 Amperes avg.
- 175°C junction temperature
- Reverse energy tested
- V<sub>RRM</sub> 150 volts
- ROHS Compliant

\*Add the Suffix A for Common Anode, D for Doubler

## Electrical Characteristics

Average forward current per pkg  
Average forward current per leg  
Maximum surge current per leg  
Max repetitive peak reverse current per leg  
Max peak forward voltage per leg  
Max peak reverse current per leg  
Max peak reverse current per leg  
Typical junction capacitance per leg

I<sub>F(AV)</sub> 80 Amps  
I<sub>F(AV)</sub> 40 Amps  
I<sub>FSM</sub> 1000 Amps  
I<sub>R(OV)</sub> 2 Amps  
V<sub>FM</sub> 0.86 Volts  
I<sub>RM</sub> 3 mA  
I<sub>RM</sub> 1 mA  
C<sub>J</sub> 970 pF

T<sub>C</sub> = 144°C, square wave, R<sub>θJC</sub> = 0.5°C/W  
T<sub>C</sub> = 144°C, square wave, R<sub>θJC</sub> = 1.0°C/W  
8.3 ms, half sine, T<sub>J</sub> = 175°C  
f = 1 KHZ, 25°C, 1μsec square wave  
I<sub>FM</sub> = 40A: T<sub>J</sub> = 25°C\*  
V<sub>RRM</sub>, T<sub>J</sub> = 125°C\*  
V<sub>RRM</sub>, T<sub>J</sub> = 25°C  
V<sub>R</sub> = 5.0V, T<sub>C</sub> = 25°C

\*Pulse test: Pulse width 300μsec, Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range

T<sub>STG</sub>

-55°C to 175°C

Operating junction temp range

T<sub>J</sub>

-55°C to 175°C

Max thermal resistance per leg

R<sub>θJC</sub>

1.0°C/W Junction to case

Max thermal resistance per pkg

R<sub>θJC</sub>

0.5°C/W Junction to case

Typical thermal resistance (greased)

R<sub>θCS</sub>

0.3°C/W Case to sink

Mount base torque

10 inch pounds maximum

Weight

0.3 ounce (8.4 grams) typical

# FST80150

Figure 1  
Typical Forward Characteristics

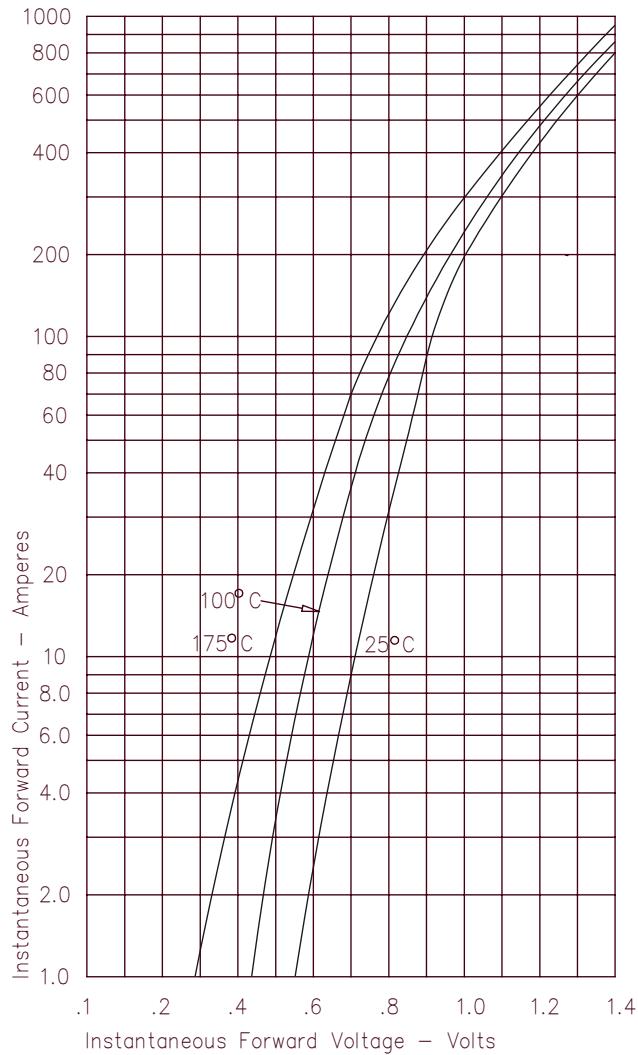


Figure 2  
Typical Reverse Characteristics

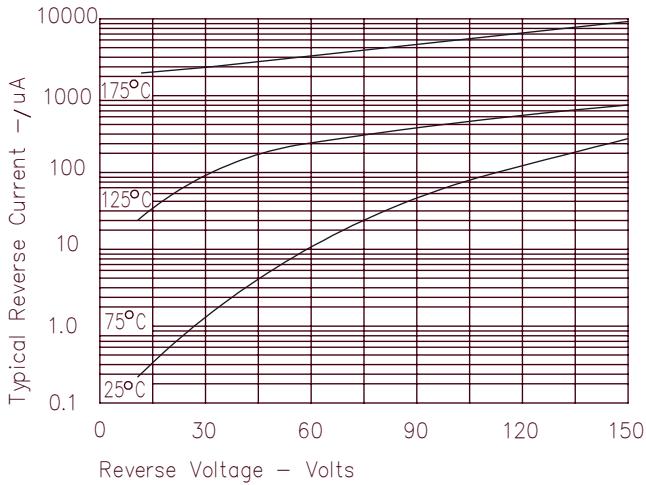


Figure 3  
Typical Junction Capacitance

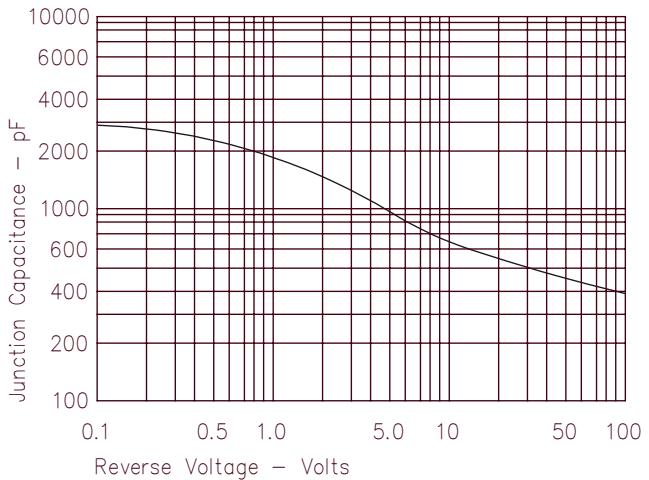


Figure 4  
Forward Current Derating – Per Leg

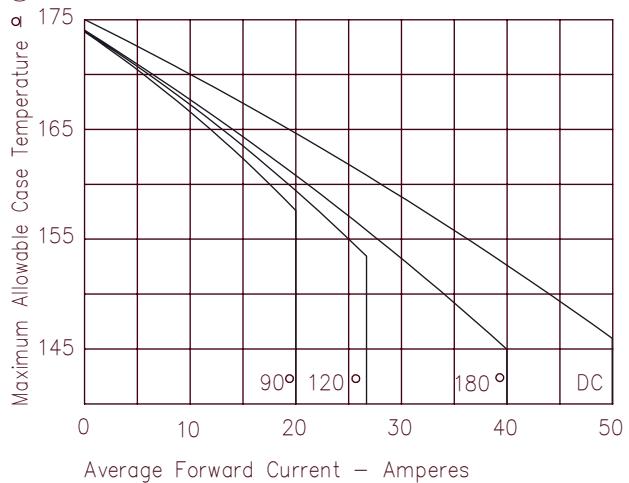


Figure 5  
Maximum Forward Power Dissipation

