

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0082285744](#)
Status: **Active**
Description: 1.27mm (.050") Pitch Round Conductor Flat Cable - 28 AWG (7 x 36) Stranded Tinned, 44 Circuits, Reel 30.48m (100.0') Length

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR61126
 UL E61522

General

Product Family Cable
 Series [6800](#)
 Crimp Quality Equipment Yes
 Geographic Area Asia
 Product Name Ribbon

Physical

Cable Length 30.48m (100.0')
 Circuits (Loaded) 44
 Circuits (maximum) 44
 Insulation PVC
 Packaging Type Reel
 Pitch - Term. Interface (in) 0.050 In
 Pitch - Term. Interface (mm) 1.27 mm
 Temperature Range - Operating -20°C to +105°C
 Wire Size AWG 28
 Wire/Cable Type (7x36) Stranded, Tinned

Electrical


Current - Maximum per Contact N/A
 Voltage - Maximum 300V

Material Info

Old Part Number 6800-44-100B

Reference - Drawing Numbers

Sales Drawing SD-6800-001

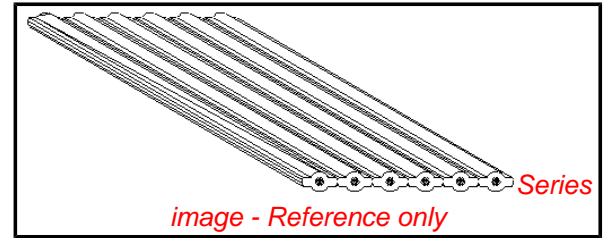

EU RoHS

Compliance Status

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.


Search Parts in this Series

[6800Series](#)

Use With

[70121](#) MX-50™ Slimline Ribbon Cable.

[90584](#) Picoflex® PF-50 IDT Receptacle

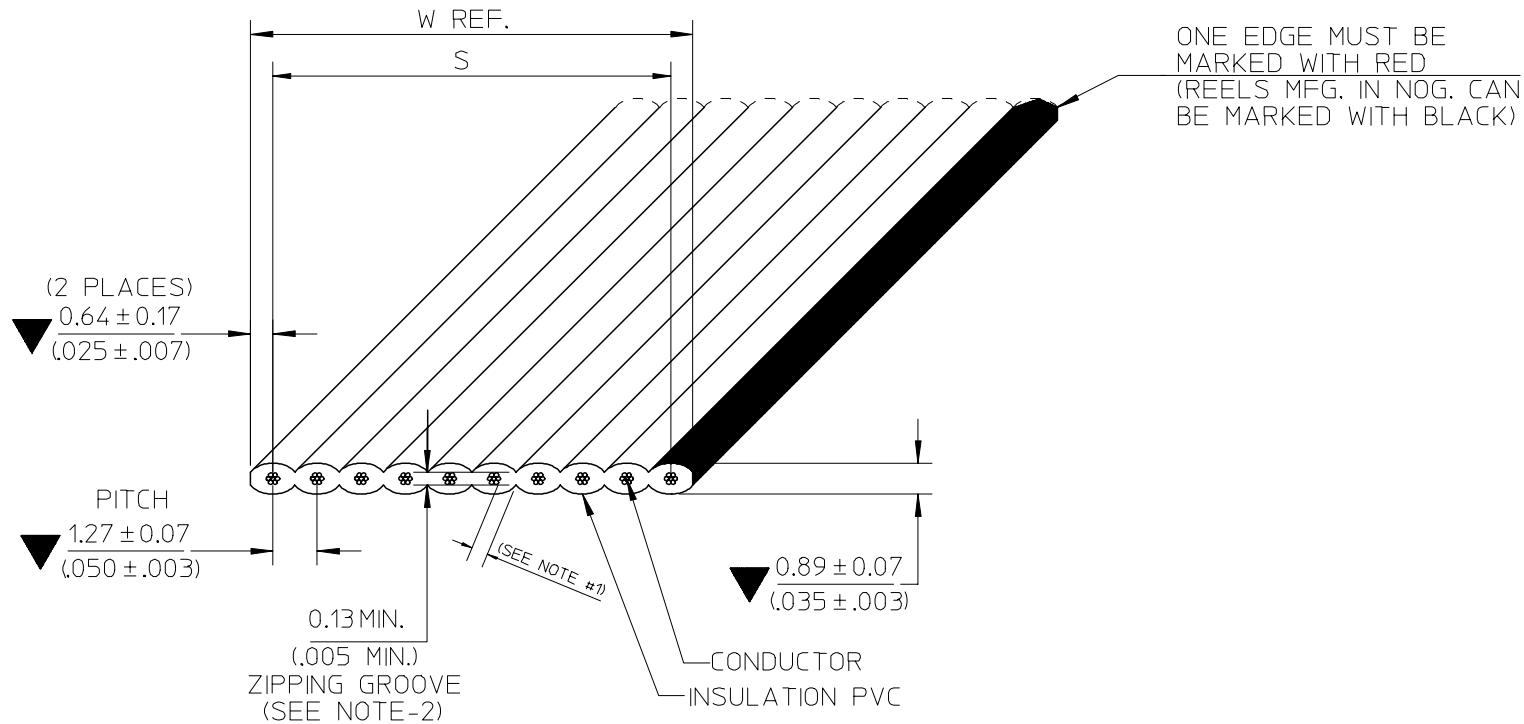

- NOTE :
1. THE CABLE SHALL HAVE A MINIMUM OF 0.178mm. (.007") THICKNESS INSULATION AT ANY POINT
 2. RIP TEST:
 - THE 0.13mm. (.005") ZIPPING GROOVE SHALL BE CAPABLE OF BEING RIPPED BY HAND WITHIN THE RECESS, WITHOUT EXPOSING THE ADJACENT CONDUCTORS
 3. RoHS AND LEAD FREE COMPLIANT
 4. SPECIAL REQUIREMENT: N/A

B	E-07-0748	B ₁ : ADD NON-OPERATING TEMP.	07/11/23
A	N/A	NEW RELEASE	06/07/12
REV. HISTORY	EC NO.	DETAIL	DATE

SEE CHANGE DETAIL.
 EC NO: THL2008-0015
 DRWN: CPANSAKHOM 2007/11/28
 CHKD: DNARINTARA 2007/11/29
 APPR: SVIRATJAPOL 2007/12/04

QUALITY SYMBOLS	DESCRIPTION
▼=3	
▽=0	

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm INCH
4 PLACES	± --- ± ---
3 PLACES	± --- ± ---
2 PLACES	± --- ± ---
1 PLACE	± --- ± ---
ANGULAR ± ---°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE MM/IN	
DRAWN BY	DATE
CPANSAKHOM	2006/07/12
CHECKED BY	DATE
PMEECHAI	2006/07/12
APPROVED BY	DATE
SVIRATJAPOL	2006/07/12
MATERIAL NO.	
SEE CHART	
SIZE	
A 4	

SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
TITLE		
FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED		
MOLEX INCORPORATED		
MATERIAL NO.	DOCUMENT NO.	SHEET NO.
SEE CHART	SD-6800-001	1 OF 3
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

E

E

SPECIFICATIONS

PHYSICAL

CONDUCTOR SPACING ----- 1.27(.050") \bar{C} TO \bar{C}
 WIRE GAUGE ----- 28 AWG(7/36) AWG, STRANDED TINNED
 INSULATION ----- P.V.C GRAY (LEAD FREE)

AGENCY

U.L. STYLE NO. ----- 2651
 TEMPERATURE RATING ----- -20°C TO 105°C
 VOLTAGE RATING ----- 300V.MAX.
 FLAMMABILITY RATING ----- VW-1

ELECTRICAL

CONDUCTOR RESISTANCE (D.C.) ----- 68 m OHMS/FT. MAX.
 CHARACTERISTIC IMPEDANCE ----- 123 OHMS NOM. (GS)
 100 OHMS NOM. (GSG)
 CAPACITANCE ----- 9.1 pF/FT. NOM. (GS)
 17.0 pF/FT. NOM. (GSG)
 PROPAGATION DELAY ----- 1.4 ns/FT. NOM.
 INSULATION RESISTANCE ----- 10M OHMS (10FT. SAMPLE)
 DIELECTRIC WITHSTAND VOLTAGE ----- 2000 VRMS/MINUTE

GENERAL

Δ NON-OPERATING TEMPERATURE ----- -20°C TO 105°C
 FAULTS AND/OR SPLICES ----- 1/REEL MAX. 100⁺³₀ FT. (30.48^{+0.914}₀ M.)/REEL
 20FT. (6.096M.) MIN. LENGTH

D

D

C

C

B

B

A

A

SEE CHANGE DETAIL. EC NO: THL2008-0015 DRWN: CPANSAKHOM 2007/11/28 CHKD: DNARINTARA 2007/11/29 APPR: SVIRATJAPOL 2007/12/04	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		=	mm	INCH	DRAWN BY	DATE	TITLE			
		=	4 PLACES ± ---	± ---	CPANSAKHOM	2006/07/12	FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED			
			3 PLACES ± ---	± ---	CHECKED BY	DATE				
			2 PLACES ± ---	± ---	PMEECHAI	2006/07/12	MOLEX INCORPORATED			
	1 PLACE ± ---	± ---	APPROVED BY	DATE						
	ANGULAR ± ---°		SVIRATJAPOL	2006/07/12	MATERIAL NO.	DOCUMENT NO.	SHEET NO.			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-6800-001		2 OF 3	
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

7	6	5	4	3	2	1																																																																																																																																																																																																																																																																																																																																																							
<p style="text-align: center;">ENGINEERING NO. <u>6800-XX-XXXX</u> A B C D A : CABLE 1.27mm. (.050") CENTERS 28AWG STRANDED TINNED B : CONDUCTOR SIZE (AVAILABILITY 3 THROUGH 50) C : CABLE LENGTH 100FT. (30.48M.) D : A = INCHES B = FEET</p>																																																																																																																																																																																																																																																																																																																																																													
<table border="1"> <thead> <tr> <th>ENG. NO.</th> <th>NO.OF COND.</th> <th>DIMENSIONS INCHES (MM)</th> <th>DIM. W (REF)</th> <th>ENGINEERING NO.</th> <th>ORDER NO.</th> <th>SHIPPED ON 100FT. REELS</th> </tr> </thead> <tbody> <tr><td>6800-3</td><td>3</td><td>2.54±0.18 (1.00±.007)</td><td>3.81(1.50)</td><td>6800-03-100B</td><td>82-28-5703</td><td></td></tr> <tr><td>6800-4</td><td>4</td><td>3.81±0.18 (1.50±.007)</td><td>5.08(2.00)</td><td>6800-04-100B</td><td>82-28-5704</td><td></td></tr> <tr><td>6800-5</td><td>5</td><td>5.08±0.18 (2.00±.007)</td><td>6.35(2.50)</td><td>6800-05-100B</td><td>82-28-5705</td><td></td></tr> <tr><td>6800-6</td><td>6</td><td>6.35±0.18 (2.50±.007)</td><td>7.62(3.00)</td><td>6800-06-100B</td><td>82-28-5706</td><td></td></tr> <tr><td>6800-7</td><td>7</td><td>7.62±0.18 (3.00±.007)</td><td>8.89(3.50)</td><td>6800-07-100B</td><td>82-28-5707</td><td></td></tr> <tr><td>6800-8</td><td>8</td><td>8.89±0.18 (3.50±.007)</td><td>10.16(4.00)</td><td>6800-08-100B</td><td>82-28-5708</td><td></td></tr> <tr><td>6800-9</td><td>9</td><td>10.16±0.18 (4.00±.007)</td><td>11.43(4.50)</td><td>6800-09-100B</td><td>82-28-5709</td><td></td></tr> <tr><td>6800-10</td><td>10</td><td>11.43±0.18 (4.50±.007)</td><td>12.70(5.00)</td><td>6800-10-100B</td><td>82-28-5710</td><td></td></tr> <tr><td>6800-11</td><td>11</td><td>12.70±0.18 (5.00±.007)</td><td>13.97(5.50)</td><td>6800-11-100B</td><td>82-28-5711</td><td></td></tr> <tr><td>6800-12</td><td>12</td><td>13.97±0.18 (5.50±.007)</td><td>15.24(6.00)</td><td>6800-12-100B</td><td>82-28-5712</td><td></td></tr> <tr><td>6800-13</td><td>13</td><td>15.24±0.18 (6.00±.007)</td><td>16.51(6.50)</td><td>6800-13-100B</td><td>82-28-5713</td><td></td></tr> <tr><td>6800-14</td><td>14</td><td>16.51±0.18 (6.50±.007)</td><td>17.78(7.00)</td><td>6800-14-100B</td><td>82-28-5714</td><td></td></tr> <tr><td>6800-15</td><td>15</td><td>17.78±0.18 (7.00±.007)</td><td>19.05(7.50)</td><td>6800-15-100B</td><td>82-28-5715</td><td></td></tr> <tr><td>6800-16</td><td>16</td><td>19.05±0.23 (7.50±.009)</td><td>20.32(8.00)</td><td>6800-16-100B</td><td>82-28-5716</td><td></td></tr> <tr><td>6800-17</td><td>17</td><td>20.32±0.23 (8.00±.009)</td><td>21.59(8.50)</td><td>6800-17-100B</td><td>82-28-5717</td><td></td></tr> <tr><td>6800-18</td><td>18</td><td>21.59±0.23 (8.50±.009)</td><td>22.86(9.00)</td><td>6800-18-100B</td><td>82-28-5718</td><td></td></tr> <tr><td>6800-19</td><td>19</td><td>22.86±0.23 (9.00±.009)</td><td>24.13(9.50)</td><td>6800-19-100B</td><td>82-28-5719</td><td></td></tr> <tr><td>6800-20</td><td>20</td><td>24.13±0.23 (9.50±.009)</td><td>25.40(10.00)</td><td>6800-20-100B</td><td>82-28-5720</td><td></td></tr> <tr><td>6800-21</td><td>21</td><td>25.40±0.23 (10.00±.009)</td><td>26.67(10.50)</td><td>6800-21-100B</td><td>82-28-5721</td><td></td></tr> <tr><td>6800-22</td><td>22</td><td>26.67±0.23 (10.50±.009)</td><td>27.94(11.00)</td><td>6800-22-100B</td><td>82-28-5722</td><td></td></tr> <tr><td>6800-23</td><td>23</td><td>27.94±0.23 (11.00±.009)</td><td>29.21(11.50)</td><td>6800-23-100B</td><td>82-28-5723</td><td></td></tr> <tr><td>6800-24</td><td>24</td><td>29.21±0.23 (11.50±.009)</td><td>30.48(12.00)</td><td>6800-24-100B</td><td>82-28-5724</td><td></td></tr> <tr><td>6800-25</td><td>25</td><td>30.48±0.23 (12.00±.009)</td><td>31.75(12.50)</td><td>6800-25-100B</td><td>82-28-5725</td><td></td></tr> <tr><td>6800-26</td><td>26</td><td>31.75±0.23 (12.50±.009)</td><td>33.02(13.00)</td><td>6800-26-100B</td><td>82-28-5726</td><td></td></tr> <tr><td>6800-27</td><td>27</td><td>33.02±0.23 (13.00±.009)</td><td>34.29(13.50)</td><td>6800-27-100B</td><td>82-28-5727</td><td></td></tr> <tr><td>6800-28</td><td>28</td><td>34.29±0.23 (13.50±.009)</td><td>35.56(14.00)</td><td>6800-28-100B</td><td>82-28-5728</td><td></td></tr> <tr><td>6800-29</td><td>29</td><td>35.56±0.23 (14.00±.009)</td><td>36.83(14.50)</td><td>6800-29-100B</td><td>82-28-5729</td><td></td></tr> <tr><td>6800-30</td><td>30</td><td>36.83±0.23 (14.50±.009)</td><td>38.10(15.00)</td><td>6800-30-100B</td><td>82-28-5730</td><td></td></tr> <tr><td>6800-31</td><td>31</td><td>38.10±0.23 (15.00±.009)</td><td>39.37(15.50)</td><td>6800-31-100B</td><td>82-28-5731</td><td></td></tr> <tr><td>6800-32</td><td>32</td><td>39.37±0.23 (15.50±.009)</td><td>40.64(16.00)</td><td>6800-32-100B</td><td>82-28-5732</td><td></td></tr> <tr><td>6800-33</td><td>33</td><td>40.64±0.23 (16.00±.009)</td><td>41.91(16.50)</td><td>6800-33-100B</td><td>82-28-5733</td><td></td></tr> <tr><td>6800-34</td><td>34</td><td>41.91±0.23 (16.50±.009)</td><td>43.18(17.00)</td><td>6800-34-100B</td><td>82-28-5734</td><td></td></tr> <tr><td>6800-35</td><td>35</td><td>43.18±0.23 (17.00±.009)</td><td>44.45(17.50)</td><td>6800-35-100B</td><td>82-28-5735</td><td></td></tr> <tr><td>6800-36</td><td>36</td><td>44.45±0.23 (17.50±.009)</td><td>45.72(18.00)</td><td>6800-36-100B</td><td>82-28-5736</td><td></td></tr> <tr><td>6800-37</td><td>37</td><td>45.72±0.28 (18.00±.011)</td><td>46.99(18.50)</td><td>6800-37-100B</td><td>82-28-5737</td><td></td></tr> <tr><td>6800-38</td><td>38</td><td>46.99±0.28 (18.50±.011)</td><td>48.26(19.00)</td><td>6800-38-100B</td><td>82-28-5738</td><td></td></tr> <tr><td>6800-39</td><td>39</td><td>48.26±0.28 (19.00±.011)</td><td>49.53(19.50)</td><td>6800-39-100B</td><td>82-28-5739</td><td></td></tr> <tr><td>6800-40</td><td>40</td><td>49.53±0.28 (19.50±.011)</td><td>50.80(20.00)</td><td>6800-40-100B</td><td>82-28-5740</td><td></td></tr> <tr><td>6800-41</td><td>41</td><td>50.80±0.28 (20.00±.011)</td><td>52.07(20.50)</td><td>6800-41-100B</td><td>82-28-5741</td><td></td></tr> <tr><td>6800-42</td><td>42</td><td>52.07±0.28 (20.50±.011)</td><td>53.34(21.00)</td><td>6800-42-100B</td><td>82-28-5742</td><td></td></tr> <tr><td>6800-43</td><td>43</td><td>53.34±0.28 (21.00±.011)</td><td>54.61(21.50)</td><td>6800-43-100B</td><td>82-28-5743</td><td></td></tr> <tr><td>6800-44</td><td>44</td><td>54.61±0.28 (21.50±.011)</td><td>55.88(22.00)</td><td>6800-44-100B</td><td>82-28-5744</td><td></td></tr> <tr><td>6800-45</td><td>45</td><td>55.88±0.28 (22.00±.011)</td><td>57.15(22.50)</td><td>6800-45-100B</td><td>82-28-5745</td><td></td></tr> <tr><td>6800-46</td><td>46</td><td>57.15±0.28 (22.50±.011)</td><td>58.42(23.00)</td><td>6800-46-100B</td><td>82-28-5746</td><td></td></tr> <tr><td>6800-47</td><td>47</td><td>58.42±0.28 (23.00±.011)</td><td>59.69(23.50)</td><td>6800-47-100B</td><td>82-28-5747</td><td></td></tr> <tr><td>6800-48</td><td>48</td><td>59.69±0.28 (23.50±.011)</td><td>60.96(24.00)</td><td>6800-48-100B</td><td>82-28-5748</td><td></td></tr> <tr><td>6800-49</td><td>49</td><td>60.96±0.28 (24.00±.011)</td><td>62.23(24.50)</td><td>6800-49-100B</td><td>82-28-5749</td><td></td></tr> <tr><td>6800-50</td><td>50</td><td>62.23±0.28 (24.50±.011)</td><td>63.50(25.00)</td><td>6800-50-100B</td><td>82-28-5750</td><td></td></tr> </tbody> </table>							ENG. NO.	NO.OF COND.	DIMENSIONS INCHES (MM)	DIM. W (REF)	ENGINEERING NO.	ORDER NO.	SHIPPED ON 100FT. REELS	6800-3	3	2.54±0.18 (1.00±.007)	3.81(1.50)	6800-03-100B	82-28-5703		6800-4	4	3.81±0.18 (1.50±.007)	5.08(2.00)	6800-04-100B	82-28-5704		6800-5	5	5.08±0.18 (2.00±.007)	6.35(2.50)	6800-05-100B	82-28-5705		6800-6	6	6.35±0.18 (2.50±.007)	7.62(3.00)	6800-06-100B	82-28-5706		6800-7	7	7.62±0.18 (3.00±.007)	8.89(3.50)	6800-07-100B	82-28-5707		6800-8	8	8.89±0.18 (3.50±.007)	10.16(4.00)	6800-08-100B	82-28-5708		6800-9	9	10.16±0.18 (4.00±.007)	11.43(4.50)	6800-09-100B	82-28-5709		6800-10	10	11.43±0.18 (4.50±.007)	12.70(5.00)	6800-10-100B	82-28-5710		6800-11	11	12.70±0.18 (5.00±.007)	13.97(5.50)	6800-11-100B	82-28-5711		6800-12	12	13.97±0.18 (5.50±.007)	15.24(6.00)	6800-12-100B	82-28-5712		6800-13	13	15.24±0.18 (6.00±.007)	16.51(6.50)	6800-13-100B	82-28-5713		6800-14	14	16.51±0.18 (6.50±.007)	17.78(7.00)	6800-14-100B	82-28-5714		6800-15	15	17.78±0.18 (7.00±.007)	19.05(7.50)	6800-15-100B	82-28-5715		6800-16	16	19.05±0.23 (7.50±.009)	20.32(8.00)	6800-16-100B	82-28-5716		6800-17	17	20.32±0.23 (8.00±.009)	21.59(8.50)	6800-17-100B	82-28-5717		6800-18	18	21.59±0.23 (8.50±.009)	22.86(9.00)	6800-18-100B	82-28-5718		6800-19	19	22.86±0.23 (9.00±.009)	24.13(9.50)	6800-19-100B	82-28-5719		6800-20	20	24.13±0.23 (9.50±.009)	25.40(10.00)	6800-20-100B	82-28-5720		6800-21	21	25.40±0.23 (10.00±.009)	26.67(10.50)	6800-21-100B	82-28-5721		6800-22	22	26.67±0.23 (10.50±.009)	27.94(11.00)	6800-22-100B	82-28-5722		6800-23	23	27.94±0.23 (11.00±.009)	29.21(11.50)	6800-23-100B	82-28-5723		6800-24	24	29.21±0.23 (11.50±.009)	30.48(12.00)	6800-24-100B	82-28-5724		6800-25	25	30.48±0.23 (12.00±.009)	31.75(12.50)	6800-25-100B	82-28-5725		6800-26	26	31.75±0.23 (12.50±.009)	33.02(13.00)	6800-26-100B	82-28-5726		6800-27	27	33.02±0.23 (13.00±.009)	34.29(13.50)	6800-27-100B	82-28-5727		6800-28	28	34.29±0.23 (13.50±.009)	35.56(14.00)	6800-28-100B	82-28-5728		6800-29	29	35.56±0.23 (14.00±.009)	36.83(14.50)	6800-29-100B	82-28-5729		6800-30	30	36.83±0.23 (14.50±.009)	38.10(15.00)	6800-30-100B	82-28-5730		6800-31	31	38.10±0.23 (15.00±.009)	39.37(15.50)	6800-31-100B	82-28-5731		6800-32	32	39.37±0.23 (15.50±.009)	40.64(16.00)	6800-32-100B	82-28-5732		6800-33	33	40.64±0.23 (16.00±.009)	41.91(16.50)	6800-33-100B	82-28-5733		6800-34	34	41.91±0.23 (16.50±.009)	43.18(17.00)	6800-34-100B	82-28-5734		6800-35	35	43.18±0.23 (17.00±.009)	44.45(17.50)	6800-35-100B	82-28-5735		6800-36	36	44.45±0.23 (17.50±.009)	45.72(18.00)	6800-36-100B	82-28-5736		6800-37	37	45.72±0.28 (18.00±.011)	46.99(18.50)	6800-37-100B	82-28-5737		6800-38	38	46.99±0.28 (18.50±.011)	48.26(19.00)	6800-38-100B	82-28-5738		6800-39	39	48.26±0.28 (19.00±.011)	49.53(19.50)	6800-39-100B	82-28-5739		6800-40	40	49.53±0.28 (19.50±.011)	50.80(20.00)	6800-40-100B	82-28-5740		6800-41	41	50.80±0.28 (20.00±.011)	52.07(20.50)	6800-41-100B	82-28-5741		6800-42	42	52.07±0.28 (20.50±.011)	53.34(21.00)	6800-42-100B	82-28-5742		6800-43	43	53.34±0.28 (21.00±.011)	54.61(21.50)	6800-43-100B	82-28-5743		6800-44	44	54.61±0.28 (21.50±.011)	55.88(22.00)	6800-44-100B	82-28-5744		6800-45	45	55.88±0.28 (22.00±.011)	57.15(22.50)	6800-45-100B	82-28-5745		6800-46	46	57.15±0.28 (22.50±.011)	58.42(23.00)	6800-46-100B	82-28-5746		6800-47	47	58.42±0.28 (23.00±.011)	59.69(23.50)	6800-47-100B	82-28-5747		6800-48	48	59.69±0.28 (23.50±.011)	60.96(24.00)	6800-48-100B	82-28-5748		6800-49	49	60.96±0.28 (24.00±.011)	62.23(24.50)	6800-49-100B	82-28-5749		6800-50	50	62.23±0.28 (24.50±.011)	63.50(25.00)	6800-50-100B	82-28-5750	
ENG. NO.	NO.OF COND.	DIMENSIONS INCHES (MM)	DIM. W (REF)	ENGINEERING NO.	ORDER NO.	SHIPPED ON 100FT. REELS																																																																																																																																																																																																																																																																																																																																																							
6800-3	3	2.54±0.18 (1.00±.007)	3.81(1.50)	6800-03-100B	82-28-5703																																																																																																																																																																																																																																																																																																																																																								
6800-4	4	3.81±0.18 (1.50±.007)	5.08(2.00)	6800-04-100B	82-28-5704																																																																																																																																																																																																																																																																																																																																																								
6800-5	5	5.08±0.18 (2.00±.007)	6.35(2.50)	6800-05-100B	82-28-5705																																																																																																																																																																																																																																																																																																																																																								
6800-6	6	6.35±0.18 (2.50±.007)	7.62(3.00)	6800-06-100B	82-28-5706																																																																																																																																																																																																																																																																																																																																																								
6800-7	7	7.62±0.18 (3.00±.007)	8.89(3.50)	6800-07-100B	82-28-5707																																																																																																																																																																																																																																																																																																																																																								
6800-8	8	8.89±0.18 (3.50±.007)	10.16(4.00)	6800-08-100B	82-28-5708																																																																																																																																																																																																																																																																																																																																																								
6800-9	9	10.16±0.18 (4.00±.007)	11.43(4.50)	6800-09-100B	82-28-5709																																																																																																																																																																																																																																																																																																																																																								
6800-10	10	11.43±0.18 (4.50±.007)	12.70(5.00)	6800-10-100B	82-28-5710																																																																																																																																																																																																																																																																																																																																																								
6800-11	11	12.70±0.18 (5.00±.007)	13.97(5.50)	6800-11-100B	82-28-5711																																																																																																																																																																																																																																																																																																																																																								
6800-12	12	13.97±0.18 (5.50±.007)	15.24(6.00)	6800-12-100B	82-28-5712																																																																																																																																																																																																																																																																																																																																																								
6800-13	13	15.24±0.18 (6.00±.007)	16.51(6.50)	6800-13-100B	82-28-5713																																																																																																																																																																																																																																																																																																																																																								
6800-14	14	16.51±0.18 (6.50±.007)	17.78(7.00)	6800-14-100B	82-28-5714																																																																																																																																																																																																																																																																																																																																																								
6800-15	15	17.78±0.18 (7.00±.007)	19.05(7.50)	6800-15-100B	82-28-5715																																																																																																																																																																																																																																																																																																																																																								
6800-16	16	19.05±0.23 (7.50±.009)	20.32(8.00)	6800-16-100B	82-28-5716																																																																																																																																																																																																																																																																																																																																																								
6800-17	17	20.32±0.23 (8.00±.009)	21.59(8.50)	6800-17-100B	82-28-5717																																																																																																																																																																																																																																																																																																																																																								
6800-18	18	21.59±0.23 (8.50±.009)	22.86(9.00)	6800-18-100B	82-28-5718																																																																																																																																																																																																																																																																																																																																																								
6800-19	19	22.86±0.23 (9.00±.009)	24.13(9.50)	6800-19-100B	82-28-5719																																																																																																																																																																																																																																																																																																																																																								
6800-20	20	24.13±0.23 (9.50±.009)	25.40(10.00)	6800-20-100B	82-28-5720																																																																																																																																																																																																																																																																																																																																																								
6800-21	21	25.40±0.23 (10.00±.009)	26.67(10.50)	6800-21-100B	82-28-5721																																																																																																																																																																																																																																																																																																																																																								
6800-22	22	26.67±0.23 (10.50±.009)	27.94(11.00)	6800-22-100B	82-28-5722																																																																																																																																																																																																																																																																																																																																																								
6800-23	23	27.94±0.23 (11.00±.009)	29.21(11.50)	6800-23-100B	82-28-5723																																																																																																																																																																																																																																																																																																																																																								
6800-24	24	29.21±0.23 (11.50±.009)	30.48(12.00)	6800-24-100B	82-28-5724																																																																																																																																																																																																																																																																																																																																																								
6800-25	25	30.48±0.23 (12.00±.009)	31.75(12.50)	6800-25-100B	82-28-5725																																																																																																																																																																																																																																																																																																																																																								
6800-26	26	31.75±0.23 (12.50±.009)	33.02(13.00)	6800-26-100B	82-28-5726																																																																																																																																																																																																																																																																																																																																																								
6800-27	27	33.02±0.23 (13.00±.009)	34.29(13.50)	6800-27-100B	82-28-5727																																																																																																																																																																																																																																																																																																																																																								
6800-28	28	34.29±0.23 (13.50±.009)	35.56(14.00)	6800-28-100B	82-28-5728																																																																																																																																																																																																																																																																																																																																																								
6800-29	29	35.56±0.23 (14.00±.009)	36.83(14.50)	6800-29-100B	82-28-5729																																																																																																																																																																																																																																																																																																																																																								
6800-30	30	36.83±0.23 (14.50±.009)	38.10(15.00)	6800-30-100B	82-28-5730																																																																																																																																																																																																																																																																																																																																																								
6800-31	31	38.10±0.23 (15.00±.009)	39.37(15.50)	6800-31-100B	82-28-5731																																																																																																																																																																																																																																																																																																																																																								
6800-32	32	39.37±0.23 (15.50±.009)	40.64(16.00)	6800-32-100B	82-28-5732																																																																																																																																																																																																																																																																																																																																																								
6800-33	33	40.64±0.23 (16.00±.009)	41.91(16.50)	6800-33-100B	82-28-5733																																																																																																																																																																																																																																																																																																																																																								
6800-34	34	41.91±0.23 (16.50±.009)	43.18(17.00)	6800-34-100B	82-28-5734																																																																																																																																																																																																																																																																																																																																																								
6800-35	35	43.18±0.23 (17.00±.009)	44.45(17.50)	6800-35-100B	82-28-5735																																																																																																																																																																																																																																																																																																																																																								
6800-36	36	44.45±0.23 (17.50±.009)	45.72(18.00)	6800-36-100B	82-28-5736																																																																																																																																																																																																																																																																																																																																																								
6800-37	37	45.72±0.28 (18.00±.011)	46.99(18.50)	6800-37-100B	82-28-5737																																																																																																																																																																																																																																																																																																																																																								
6800-38	38	46.99±0.28 (18.50±.011)	48.26(19.00)	6800-38-100B	82-28-5738																																																																																																																																																																																																																																																																																																																																																								
6800-39	39	48.26±0.28 (19.00±.011)	49.53(19.50)	6800-39-100B	82-28-5739																																																																																																																																																																																																																																																																																																																																																								
6800-40	40	49.53±0.28 (19.50±.011)	50.80(20.00)	6800-40-100B	82-28-5740																																																																																																																																																																																																																																																																																																																																																								
6800-41	41	50.80±0.28 (20.00±.011)	52.07(20.50)	6800-41-100B	82-28-5741																																																																																																																																																																																																																																																																																																																																																								
6800-42	42	52.07±0.28 (20.50±.011)	53.34(21.00)	6800-42-100B	82-28-5742																																																																																																																																																																																																																																																																																																																																																								
6800-43	43	53.34±0.28 (21.00±.011)	54.61(21.50)	6800-43-100B	82-28-5743																																																																																																																																																																																																																																																																																																																																																								
6800-44	44	54.61±0.28 (21.50±.011)	55.88(22.00)	6800-44-100B	82-28-5744																																																																																																																																																																																																																																																																																																																																																								
6800-45	45	55.88±0.28 (22.00±.011)	57.15(22.50)	6800-45-100B	82-28-5745																																																																																																																																																																																																																																																																																																																																																								
6800-46	46	57.15±0.28 (22.50±.011)	58.42(23.00)	6800-46-100B	82-28-5746																																																																																																																																																																																																																																																																																																																																																								
6800-47	47	58.42±0.28 (23.00±.011)	59.69(23.50)	6800-47-100B	82-28-5747																																																																																																																																																																																																																																																																																																																																																								
6800-48	48	59.69±0.28 (23.50±.011)	60.96(24.00)	6800-48-100B	82-28-5748																																																																																																																																																																																																																																																																																																																																																								
6800-49	49	60.96±0.28 (24.00±.011)	62.23(24.50)	6800-49-100B	82-28-5749																																																																																																																																																																																																																																																																																																																																																								
6800-50	50	62.23±0.28 (24.50±.011)	63.50(25.00)	6800-50-100B	82-28-5750																																																																																																																																																																																																																																																																																																																																																								
<table border="1"> <tr> <td rowspan="2"> QUALITY SYMBOLS </td> <td rowspan="2"> DESCRIPTION DRWN:CPANSAKHOM 2007/11/11/04 CHKD:JWARINTARA 2007/11/11/29 APPR:SVIRATJAPOL 2007/11/12/04 </td> <td rowspan="2"> GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <td></td> <td>mm</td> <td>INCH</td> </tr> <tr> <td>4 PLACES</td> <td>+ - - -</td> <td>+ - - -</td> </tr> <tr> <td>3 PLACES</td> <td>+ - - -</td> <td>+ - - -</td> </tr> <tr> <td>2 PLACES</td> <td>+ - - -</td> <td>+ - - -</td> </tr> <tr> <td>1 PLACE</td> <td>+ - - -</td> <td>+ - - -</td> </tr> </table> </td> <td rowspan="2"> DIMENSION STYLE MM/IN </td> <td rowspan="2"> SCALE NTS </td> <td rowspan="2"> DESIGN UNITS INCH </td> <td rowspan="2"> THIRD ANGLE PROJECTION </td> <td rowspan="2"> TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED </td> <td rowspan="2"> MOLEX INCORPORATED </td> <td rowspan="2"> SHEET NO. 3 OF 3 </td> </tr> <tr> <td> DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS </td> <td> DRAWN BY CPANSAKHOM </td> <td> DATE 2006/07/12 </td> <td> TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED </td> <td> APPROVED BY SVIRATJAPOL </td> <td> DATE 2006/07/12 </td> <td> DOCUMENT NO. SD-6800-001 </td> </tr> </table>							QUALITY SYMBOLS 	DESCRIPTION DRWN:CPANSAKHOM 2007/11/11/04 CHKD:JWARINTARA 2007/11/11/29 APPR:SVIRATJAPOL 2007/11/12/04	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <td></td> <td>mm</td> <td>INCH</td> </tr> <tr> <td>4 PLACES</td> <td>+ - - -</td> <td>+ - - -</td> </tr> <tr> <td>3 PLACES</td> <td>+ - - -</td> <td>+ - - -</td> </tr> <tr> <td>2 PLACES</td> <td>+ - - -</td> <td>+ - - -</td> </tr> <tr> <td>1 PLACE</td> <td>+ - - -</td> <td>+ - - -</td> </tr> </table>		mm	INCH	4 PLACES	+ - - -	+ - - -	3 PLACES	+ - - -	+ - - -	2 PLACES	+ - - -	+ - - -	1 PLACE	+ - - -	+ - - -	DIMENSION STYLE MM/IN	SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	MOLEX INCORPORATED	SHEET NO. 3 OF 3	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY CPANSAKHOM	DATE 2006/07/12	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	APPROVED BY SVIRATJAPOL	DATE 2006/07/12	DOCUMENT NO. SD-6800-001																																																																																																																																																																																																																																																																																																																							
QUALITY SYMBOLS 	DESCRIPTION DRWN:CPANSAKHOM 2007/11/11/04 CHKD:JWARINTARA 2007/11/11/29 APPR:SVIRATJAPOL 2007/11/12/04	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <td></td> <td>mm</td> <td>INCH</td> </tr> <tr> <td>4 PLACES</td> <td>+ - - -</td> <td>+ - - -</td> </tr> <tr> <td>3 PLACES</td> <td>+ - - -</td> <td>+ - - -</td> </tr> <tr> <td>2 PLACES</td> <td>+ - - -</td> <td>+ - - -</td> </tr> <tr> <td>1 PLACE</td> <td>+ - - -</td> <td>+ - - -</td> </tr> </table>		mm	INCH	4 PLACES				+ - - -	+ - - -	3 PLACES	+ - - -	+ - - -	2 PLACES	+ - - -	+ - - -	1 PLACE	+ - - -	+ - - -	DIMENSION STYLE MM/IN	SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION								TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	MOLEX INCORPORATED	SHEET NO. 3 OF 3																																																																																																																																																																																																																																																																																																																											
				mm	INCH																																																																																																																																																																																																																																																																																																																																																								
4 PLACES	+ - - -	+ - - -																																																																																																																																																																																																																																																																																																																																																											
3 PLACES	+ - - -	+ - - -																																																																																																																																																																																																																																																																																																																																																											
2 PLACES	+ - - -	+ - - -																																																																																																																																																																																																																																																																																																																																																											
1 PLACE	+ - - -	+ - - -																																																																																																																																																																																																																																																																																																																																																											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY CPANSAKHOM	DATE 2006/07/12	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	APPROVED BY SVIRATJAPOL	DATE 2006/07/12	DOCUMENT NO. SD-6800-001																																																																																																																																																																																																																																																																																																																																																							
<table border="1"> <tr> <td rowspan="2"> SEE CHANGE DETAIL. 05 00-008-002 HL TH: ON EC </td> <td rowspan="2"> REV B </td> <td rowspan="2"> QUALITY SYMBOLS </td> <td rowspan="2"> DESCRIPTION DRWN:CPANSAKHOM 2007/11/11/04 CHKD:JWARINTARA 2007/11/11/29 APPR:SVIRATJAPOL 2007/11/12/04 </td> <td rowspan="2"> DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS </td> <td rowspan="2"> DIMENSION STYLE MM/IN </td> <td rowspan="2"> SCALE NTS </td> <td rowspan="2"> DESIGN UNITS INCH </td> <td rowspan="2"> THIRD ANGLE PROJECTION </td> <td rowspan="2"> TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED </td> <td rowspan="2"> MOLEX INCORPORATED </td> <td rowspan="2"> SHEET NO. 3 OF 3 </td> </tr> <tr> <td> DRAWN BY CPANSAKHOM </td> <td> DATE 2006/07/12 </td> <td> TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED </td> <td> APPROVED BY SVIRATJAPOL </td> <td> DATE 2006/07/12 </td> <td> DOCUMENT NO. SD-6800-001 </td> </tr> </table>							SEE CHANGE DETAIL. 05 00-008-002 HL TH: ON EC	REV B	QUALITY SYMBOLS 	DESCRIPTION DRWN:CPANSAKHOM 2007/11/11/04 CHKD:JWARINTARA 2007/11/11/29 APPR:SVIRATJAPOL 2007/11/12/04	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM/IN	SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	MOLEX INCORPORATED	SHEET NO. 3 OF 3	DRAWN BY CPANSAKHOM	DATE 2006/07/12	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	APPROVED BY SVIRATJAPOL	DATE 2006/07/12	DOCUMENT NO. SD-6800-001																																																																																																																																																																																																																																																																																																																																					
SEE CHANGE DETAIL. 05 00-008-002 HL TH: ON EC	REV B	QUALITY SYMBOLS 	DESCRIPTION DRWN:CPANSAKHOM 2007/11/11/04 CHKD:JWARINTARA 2007/11/11/29 APPR:SVIRATJAPOL 2007/11/12/04	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM/IN	SCALE NTS													DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	MOLEX INCORPORATED	SHEET NO. 3 OF 3																																																																																																																																																																																																																																																																																																																																						
							DRAWN BY CPANSAKHOM	DATE 2006/07/12	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	APPROVED BY SVIRATJAPOL	DATE 2006/07/12	DOCUMENT NO. SD-6800-001																																																																																																																																																																																																																																																																																																																																																	
<table border="1"> <tr> <td rowspan="2"> SEE CHANGE DETAIL. 05 00-008-002 HL TH: ON EC </td> <td rowspan="2"> REV B </td> <td rowspan="2"> QUALITY SYMBOLS </td> <td rowspan="2"> DESCRIPTION DRWN:CPANSAKHOM 2007/11/11/04 CHKD:JWARINTARA 2007/11/11/29 APPR:SVIRATJAPOL 2007/11/12/04 </td> <td rowspan="2"> DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS </td> <td rowspan="2"> DIMENSION STYLE MM/IN </td> <td rowspan="2"> SCALE NTS </td> <td rowspan="2"> DESIGN UNITS INCH </td> <td rowspan="2"> THIRD ANGLE PROJECTION </td> <td rowspan="2"> TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED </td> <td rowspan="2"> MOLEX INCORPORATED </td> <td rowspan="2"> SHEET NO. 3 OF 3 </td> </tr> <tr> <td> DRAWN BY CPANSAKHOM </td> <td> DATE 2006/07/12 </td> <td> TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED </td> <td> APPROVED BY SVIRATJAPOL </td> <td> DATE 2006/07/12 </td> <td> DOCUMENT NO. SD-6800-001 </td> </tr> </table>							SEE CHANGE DETAIL. 05 00-008-002 HL TH: ON EC	REV B	QUALITY SYMBOLS 	DESCRIPTION DRWN:CPANSAKHOM 2007/11/11/04 CHKD:JWARINTARA 2007/11/11/29 APPR:SVIRATJAPOL 2007/11/12/04	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM/IN	SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	MOLEX INCORPORATED	SHEET NO. 3 OF 3	DRAWN BY CPANSAKHOM	DATE 2006/07/12	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	APPROVED BY SVIRATJAPOL	DATE 2006/07/12	DOCUMENT NO. SD-6800-001																																																																																																																																																																																																																																																																																																																																					
SEE CHANGE DETAIL. 05 00-008-002 HL TH: ON EC	REV B	QUALITY SYMBOLS 	DESCRIPTION DRWN:CPANSAKHOM 2007/11/11/04 CHKD:JWARINTARA 2007/11/11/29 APPR:SVIRATJAPOL 2007/11/12/04	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM/IN	SCALE NTS													DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	MOLEX INCORPORATED	SHEET NO. 3 OF 3																																																																																																																																																																																																																																																																																																																																						
							DRAWN BY CPANSAKHOM	DATE 2006/07/12	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	APPROVED BY SVIRATJAPOL	DATE 2006/07/12	DOCUMENT NO. SD-6800-001																																																																																																																																																																																																																																																																																																																																																	
<table border="1"> <tr> <td rowspan="2"> SEE CHANGE DETAIL. 05 00-008-002 HL TH: ON EC </td> <td rowspan="2"> REV B </td> <td rowspan="2"> QUALITY SYMBOLS </td> <td rowspan="2"> DESCRIPTION DRWN:CPANSAKHOM 2007/11/11/04 CHKD:JWARINTARA 2007/11/11/29 APPR:SVIRATJAPOL 2007/11/12/04 </td> <td rowspan="2"> DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS </td> <td rowspan="2"> DIMENSION STYLE MM/IN </td> <td rowspan="2"> SCALE NTS </td> <td rowspan="2"> DESIGN UNITS INCH </td> <td rowspan="2"> THIRD ANGLE PROJECTION </td> <td rowspan="2"> TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED </td> <td rowspan="2"> MOLEX INCORPORATED </td> <td rowspan="2"> SHEET NO. 3 OF 3 </td> </tr> <tr> <td> DRAWN BY CPANSAKHOM </td> <td> DATE 2006/07/12 </td> <td> TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED </td> <td> APPROVED BY SVIRATJAPOL </td> <td> DATE 2006/07/12 </td> <td> DOCUMENT NO. SD-6800-001 </td> </tr> </table>							SEE CHANGE DETAIL. 05 00-008-002 HL TH: ON EC	REV B	QUALITY SYMBOLS 	DESCRIPTION DRWN:CPANSAKHOM 2007/11/11/04 CHKD:JWARINTARA 2007/11/11/29 APPR:SVIRATJAPOL 2007/11/12/04	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM/IN	SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	MOLEX INCORPORATED	SHEET NO. 3 OF 3	DRAWN BY CPANSAKHOM	DATE 2006/07/12	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	APPROVED BY SVIRATJAPOL	DATE 2006/07/12	DOCUMENT NO. SD-6800-001																																																																																																																																																																																																																																																																																																																																					
SEE CHANGE DETAIL. 05 00-008-002 HL TH: ON EC	REV B	QUALITY SYMBOLS 	DESCRIPTION DRWN:CPANSAKHOM 2007/11/11/04 CHKD:JWARINTARA 2007/11/11/29 APPR:SVIRATJAPOL 2007/11/12/04	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM/IN	SCALE NTS													DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	MOLEX INCORPORATED	SHEET NO. 3 OF 3																																																																																																																																																																																																																																																																																																																																						
							DRAWN BY CPANSAKHOM	DATE 2006/07/12	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	APPROVED BY SVIRATJAPOL	DATE 2006/07/12	DOCUMENT NO. SD-6800-001																																																																																																																																																																																																																																																																																																																																																	
<table border="1"> <tr> <td rowspan="2"> SEE CHANGE DETAIL. 05 00-008-002 HL TH: ON EC </td> <td rowspan="2"> REV B </td> <td rowspan="2"> QUALITY SYMBOLS </td> <td rowspan="2"> DESCRIPTION DRWN:CPANSAKHOM 2007/11/11/04 CHKD:JWARINTARA 2007/11/11/29 APPR:SVIRATJAPOL 2007/11/12/04 </td> <td rowspan="2"> DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS </td> <td rowspan="2"> DIMENSION STYLE MM/IN </td> <td rowspan="2"> SCALE NTS </td> <td rowspan="2"> DESIGN UNITS INCH </td> <td rowspan="2"> THIRD ANGLE PROJECTION </td> <td rowspan="2"> TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED </td> <td rowspan="2"> MOLEX INCORPORATED </td> <td rowspan="2"> SHEET NO. 3 OF 3 </td> </tr> <tr> <td> DRAWN BY CPANSAKHOM </td> <td> DATE 2006/07/12 </td> <td> TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED </td> <td> APPROVED BY SVIRATJAPOL </td> <td> DATE 2006/07/12 </td> <td> DOCUMENT NO. SD-6800-001 </td> </tr> </table>							SEE CHANGE DETAIL. 05 00-008-002 HL TH: ON EC	REV B	QUALITY SYMBOLS 	DESCRIPTION DRWN:CPANSAKHOM 2007/11/11/04 CHKD:JWARINTARA 2007/11/11/29 APPR:SVIRATJAPOL 2007/11/12/04	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM/IN	SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	MOLEX INCORPORATED	SHEET NO. 3 OF 3	DRAWN BY CPANSAKHOM	DATE 2006/07/12	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	APPROVED BY SVIRATJAPOL	DATE 2006/07/12	DOCUMENT NO. SD-6800-001																																																																																																																																																																																																																																																																																																																																					
SEE CHANGE DETAIL. 05 00-008-002 HL TH: ON EC	REV B	QUALITY SYMBOLS 	DESCRIPTION DRWN:CPANSAKHOM 2007/11/11/04 CHKD:JWARINTARA 2007/11/11/29 APPR:SVIRATJAPOL 2007/11/12/04	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM/IN	SCALE NTS													DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	MOLEX INCORPORATED	SHEET NO. 3 OF 3																																																																																																																																																																																																																																																																																																																																						
							DRAWN BY CPANSAKHOM	DATE 2006/07/12	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	APPROVED BY SVIRATJAPOL	DATE 2006/07/12	DOCUMENT NO. SD-6800-001																																																																																																																																																																																																																																																																																																																																																	