

**Type: AS737C**

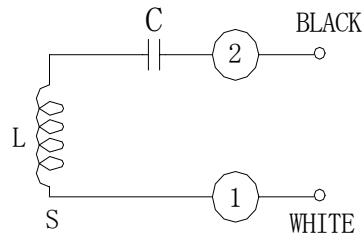
# Mitsubishi Himeji USE ONLY

**◆ Product Description**

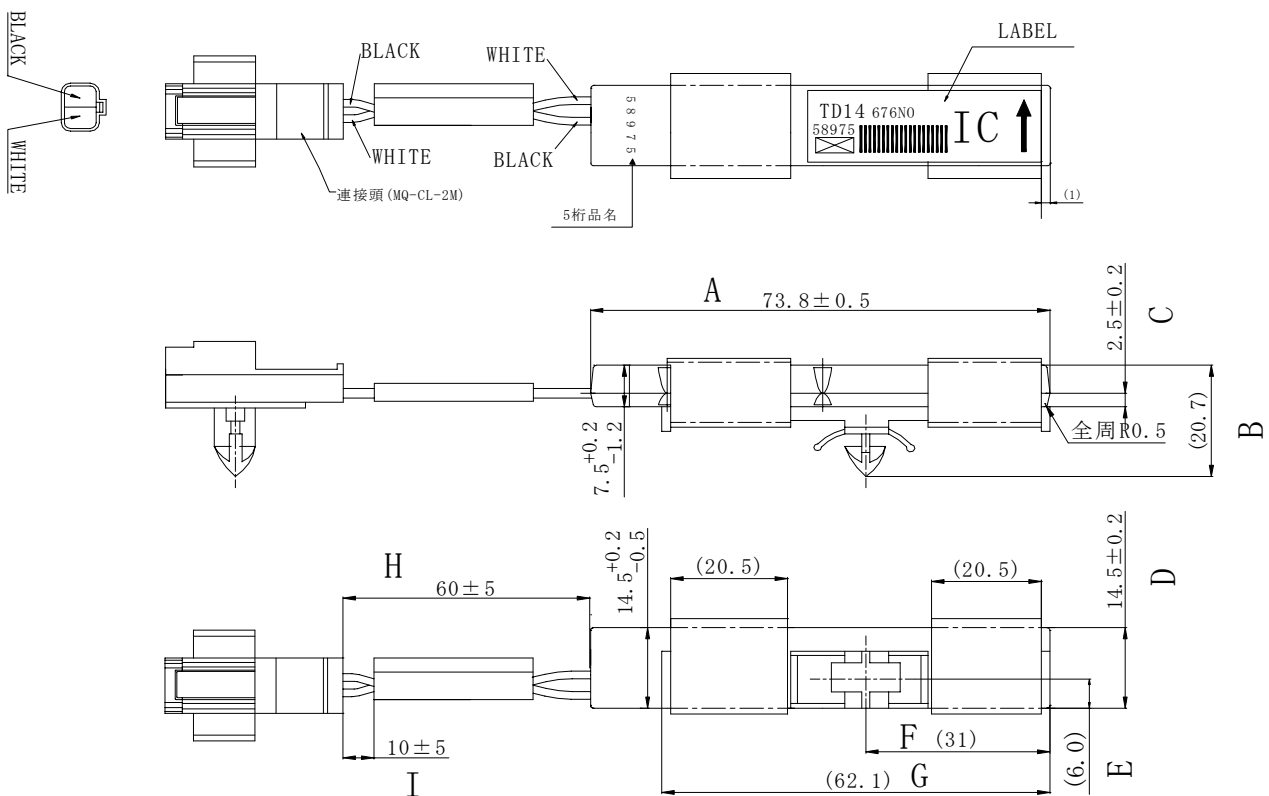
- 74.3×14.7mm Max.(L×W),7.7mm Max. Height.
- Operating temperature: -40°C~+85°C.

**◆ Feature**

- LF transponder Transmitter antenna.
- Ideally used in keyless smart entry system.
- RoHS Compliance.

**◆ Schematics(Bottom)**


“S” is winding start.

**◆ Dimensions (mm)**

**◆ Specification**

	BETWEEN	MEASURING CONDITIONS
Resonant frequency range	130.0kHz±1.0kHz WITHIN	at 25°C
Resonant Current	1.8Ap-p (Ref.)	130.0kHz (at 25°C)