

# MGFK33V4045

## 14.0~14.5GHz BAND 2W INTERNALLY MATCHED GaAs FET

### DESCRIPTION

The MGFK33V4045 is an internally impedance matched GaAs power FET especially designed for use in 14.0 ~ 14.5 GHz-band amplifiers. The hermetically sealed metal-ceramic package guarantees high reliability.

### FEATURES

- Internally impedance matched
- Flip-chip mounted
- High output power  
 $P_{1dB} = 2.0 \text{ W (TYP.) @ } f = 14 \sim 14.5 \text{ GHz}$
- High linear power gain  
 $G_{LP} = 7.0 \text{ dB (TYP.) @ } f = 14 \sim 14.5 \text{ GHz}$
- High power added efficiency  
 $\eta_{add} = 22\% \text{ (TYP.) @ } f = 14 \sim 14.5 \text{ GHz, } P_{1dB}$

### APPLICATION


For use in 14.0 ~ 14.5 GHz-band amplifiers.

### QUALITY GRADE

- IG

### RECOMMENDED BIAS CONDITIONS

- $V_{DS} = 8\text{V}$
- $I_D = 700\text{mA}$
- Refer to Bias Procedure

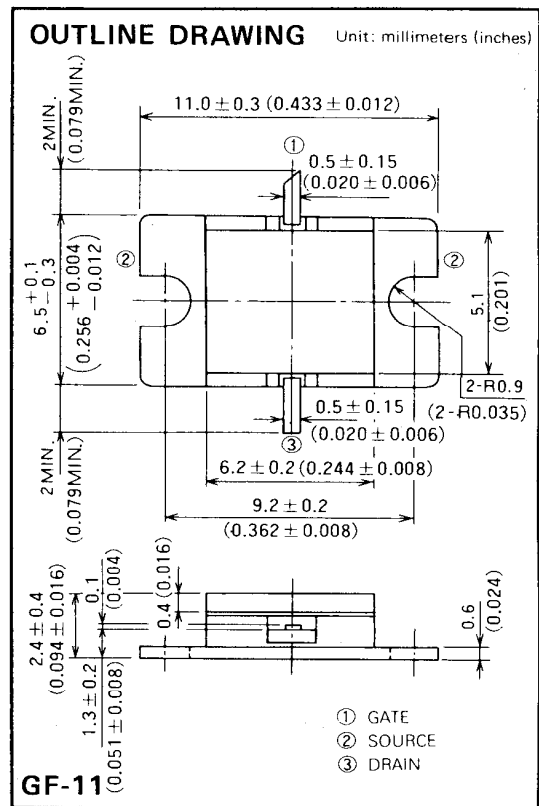

### ABSOLUTE MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )

Symbol	Parameter	Ratings	Unit
$V_{GDO}$	Gate to drain voltage	- 15	V
$V_{GSO}$	Gate to source voltage	- 15	V
$I_D$	Drain current	1800	mA
$I_{GR}$	Reverse gate current	- 5.0	mA
$I_{GF}$	Forward gate current	10.0	mA
$P_T$	Total power dissipation *1	17	W
$T_{ch}$	Channel temperature	175	$^\circ\text{C}$
$T_{stg}$	Storage temperature	- 65 ~ + 175	$^\circ\text{C}$

\* 1:  $T_c = 25^\circ\text{C}$




### ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
$I_{DSS}$	Saturated drain current	$V_{DS} = 3\text{V}, V_{GS} = 0\text{V}$	—	1.1	1.8	A
$V_{GS(off)}$	Gate to source cut-off voltage	$V_{DS} = 3\text{V}, I_D = 4\text{mA}$	- 2	—	- 5	V
$g_m$	Transconductance	$V_{DS} = 3\text{V}, I_D = 700\text{mA}$	—	600	—	mS
$P_{1dB}$	Output power at 1dB gain compression	$V_{DS} = 8\text{V}, I_D = 700\text{mA}, f = 14.0 \sim 14.5\text{GHz}$	32.0	33.0	—	dBm
$G_{LP}$	Linear power gain		5.5	7.0	—	dB
$\eta_{add}$	Power added efficiency		—	22	—	%
$R_{th(ch-c)}$	Thermal resistance *1		$\Delta V_f$ method	—	—	10


\* 1: Channel to case

**14.0~14.5GHz BAND 2W INTERNALLY MATCHED GaAs FET**

TYPICAL CHARACTERISTICS (Ta=25°C)

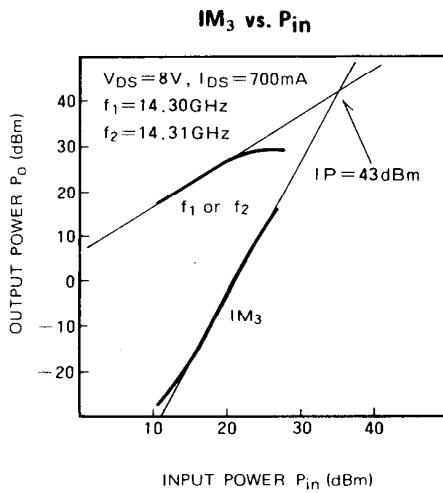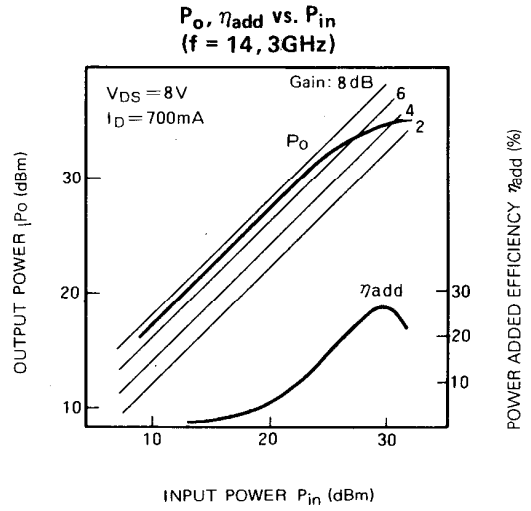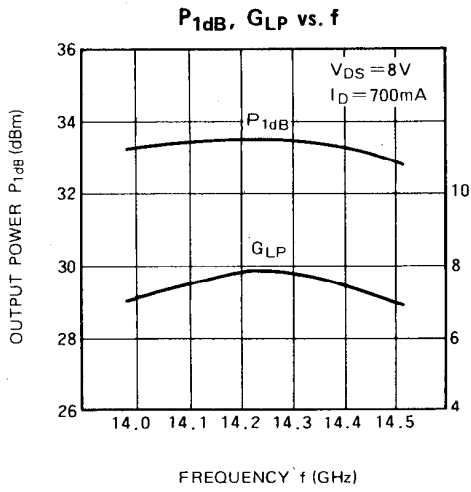

**14.0~14.5GHz BAND 2W INTERNALLY MATCHED GaAs FET**

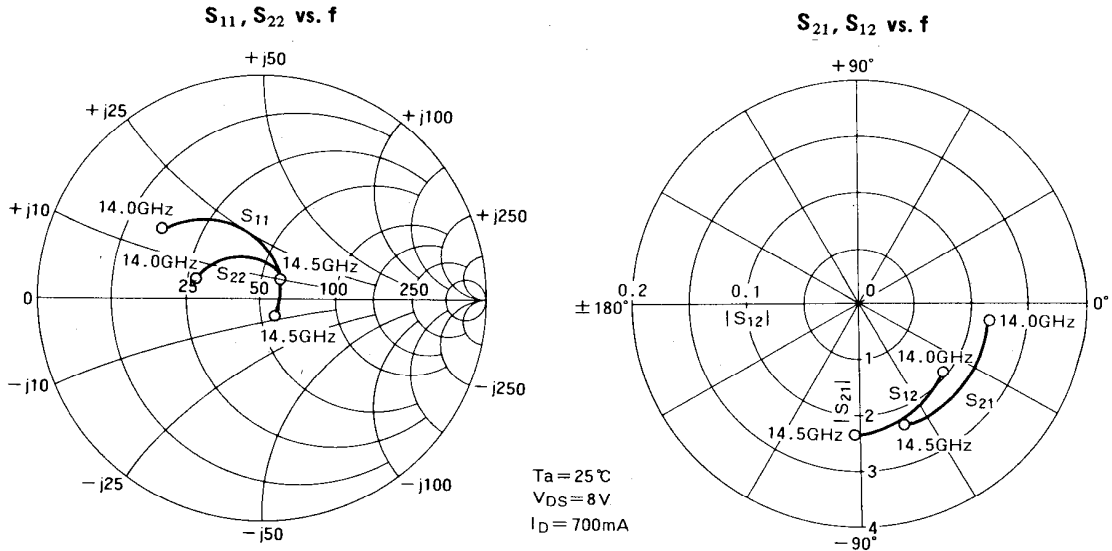

**S PARAMETERS** ( $T_a = 25^\circ\text{C}$ ,  $V_{DS} = 8\text{V}$ ,  $I_D = 700\text{mA}$ )

f (GHz)	S Parameters (TYP.)							
	$S_{11}$		$S_{21}$		$S_{12}$		$S_{22}$	
	Magn.	Angle (deg.)	Magn.	Angle (deg.)	Magn.	Angle (deg.)	Magn.	Angle (deg.)
14.0	0.50	136	2.28	-10	0.099	-41	0.32	164
14.1	0.38	121	2.35	-25	0.108	-52	0.29	153
14.2	0.27	103	2.39	-38	0.113	-61	0.25	142
14.3	0.19	78	2.43	-51	0.127	-71	0.20	130
14.4	0.13	42	2.37	-62	0.134	-82	0.15	115
14.5	0.18	5	2.29	-72	0.142	-93	0.12	93