

**DUAL 4-LINE TO 1 – LINE DATA SELECTORS/MULTIPLEXERS****Feature**

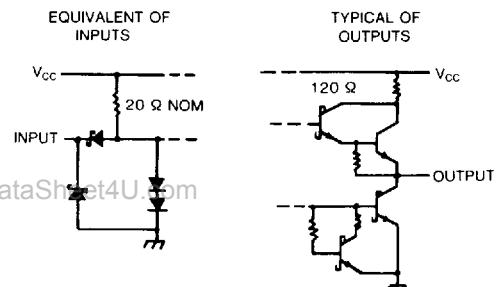
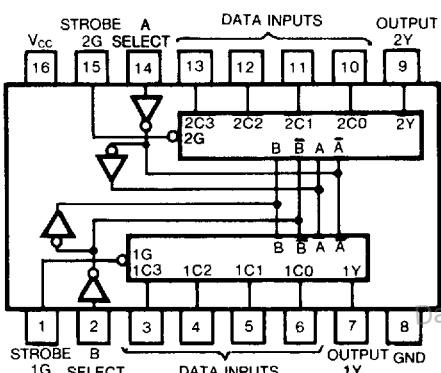
- Permits Multiplexing from N Lines to 1 Line
- Performs Parallel-to-Serial Conversion
- Strobe (Enable) Line Provided for Cascading (N Lines to n Lines)
- High-Fan-Out, Low-Impedance, Totem Pole Outputs
- Fully Compatible with Most TTL and DTL Circuits

**Description**

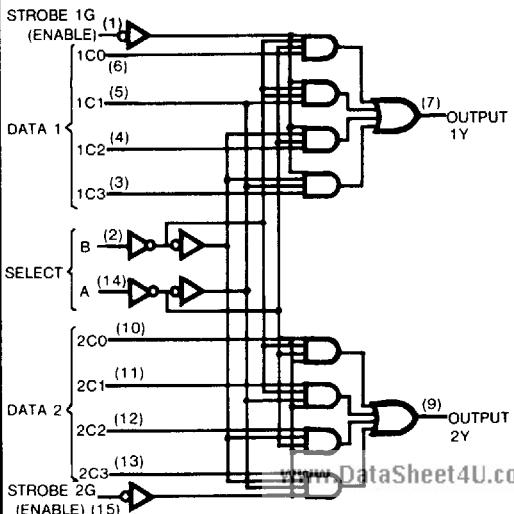
This monolithic data selectors/multiplexers contains inverters and drivers to supply fully complementary, on-chip binary decoding data selection to the AND/OR invert gates. Separate strobe inputs are provided for each of the two four line sections.

**Function Table**

SELECT INPUTS	DATA INPUTS				STROBE	OUTPUT
B A	C0	C1	C2	C3	G	Y
X X	X	X	X	X	H	L
L L	L	X	X	X	L	L
L L	H	X	X	X	L	H
L H	X	L	X	X	L	L
L H	X	H	X	X	L	H
H L	X	X	L	X	L	L
H L	X	X	H	X	L	H
H H	X	X	X	L	L	L
H H	X	X	X	H	L	H

**Schematics of Inputs and Outputs****Pin Configuration**

Suffix-Blank Plastic Dual In Line Package  
Suffix-J Ceramic Dual In Line Package

**Functional Block Diagram**

**Absolute Maximum Ratings**

- Supply voltage, V<sub>CC</sub> ..... 7V
- Input voltage ..... 7V
- Operating free-air temperature range 54LS ..... -55°C to 125°C  
74LS ..... 0°C to 70°C
- Storage temperature range ..... -65°C to 150°C

**Recommended Operating Conditions**

SYMBOL	PARAMETER	MIN	NOM	MAX	UNIT
V <sub>CC</sub>	Supply voltage	54	4.5	5	5.5
		74	4.75	5	5.25
I <sub>OH</sub>	High-level output current	54.74		-400	μA
		54		4	mA
I <sub>OL</sub>	Low-level output current	74		8	
		54	-55	125	°C
T <sub>A</sub>	Operating free-air temperature	74	0	70	

**Electrical Characteristics** over recommended operating free-air temperature range (unless otherwise noted)

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP (Note 1)	MAX	UNIT
V <sub>IH</sub>	High-level input voltage			2		V
V <sub>IL</sub>	Low-level input voltage	DataSheet4U.com	54		0.7	V
			74		0.8	
V <sub>IK</sub>	Input clamp voltage	V <sub>CC</sub> =Min, I <sub>I</sub> =-18mA			-1.5	V
V <sub>OH</sub>	High-level output voltage	V <sub>CC</sub> =Min, V <sub>IL</sub> =Max	54	2.5	3.4	V
		I <sub>OH</sub> =Max, V <sub>IH</sub> =Min	74	2.7	3.4	
V <sub>OL</sub>	Low-level output voltage	V <sub>CC</sub> =Min	I <sub>OL</sub> =4mA	54.74	0.25	0.4
		V <sub>IL</sub> =Max				V
		V <sub>IH</sub> =Min	I <sub>OL</sub> =8mA	74	0.35	0.5
I <sub>I</sub>	Input current at maximum input voltage	V <sub>CC</sub> =Max, V <sub>I</sub> =7V			0.1	mA
I <sub>IH</sub>	High-level input current	V <sub>CC</sub> =Max, V <sub>I</sub> =2.7V			20	μA
I <sub>IL</sub>	Low-level input current	V <sub>CC</sub> =Max, V <sub>I</sub> =0.4V			-0.4	mA
I <sub>OS</sub>	Short-circuit output current	V <sub>CC</sub> =Max (Note 2)		-20	-100	mA
I <sub>CCL</sub>	Supply current	V <sub>CC</sub> =5.25V (Note 3)		7.4	12	mA

Note 1 All typical values are at V<sub>CC</sub>=5V, T<sub>A</sub>=25°C

Note 2 Not more than one output should be shorted at a time, and duration should not exceed one second

Note 3 I<sub>CCL</sub> is measured with the outputs open and all inputs grounded

**Switching Characteristics, V<sub>CC</sub>=5V, T<sub>A</sub>=25°C**

SYMBOL	FROM (INPUT)	TO (OUTPUT)	TEST CONDITION#	MIN	TYP	MAX	UNIT
t <sub>PLH</sub>	Data	Y	C <sub>L</sub> =15 pF, R <sub>L</sub> =2kΩ		10	15	ns
t <sub>PHL</sub>	Data	Y			17	26	ns
t <sub>PLH</sub>	Select	Y			19	28	ns
t <sub>PHL</sub>	Select	Y			25	38	ns
t <sub>PLH</sub>	Strobe	Y			16	24	ns
t <sub>PHL</sub>	Strobe	Y			21	32	ns

\*For load circuit and voltage waveforms, see page 3-11