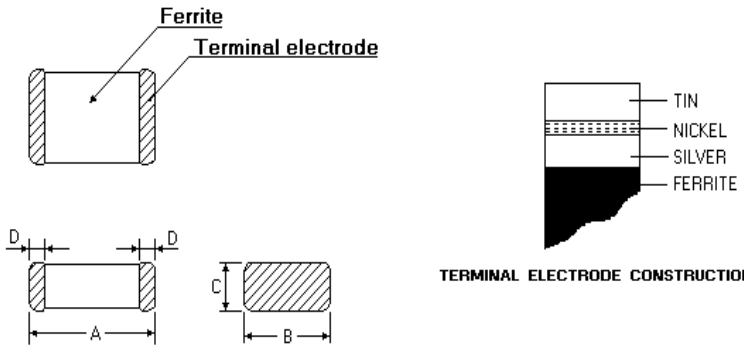


XFMRS, Inc.

SPECIFICATION FOR APPROVAL

XFMRS P/N : XFEB160808-270-4A				Rev: A	
DIMENSION : (m/m)				A	$\phi 1.6 \pm 0.2$ m/m
<p>Dimensions & Structure :</p>  <p style="text-align: center;">TERMINAL ELECTRODE CONSTRUCTION</p>				B	0.8 ± 0.2 m/m
				C	0.8 ± 0.2 m/m
				D	0.3 ± 0.3 m/m
				E	m/m
				F	m/m
				G	m/m
				H	m/m
				I	m/m
				J	m/m
				K	m/m
				L	m/m
				M	m/m
				N	m/m
				O	m/m
				ELECTRICAL REQUIREMENTS	
Z	$27 \text{ Ohms} \pm 25\%$	TEST FREQ.	100	MHz	<ul style="list-style-type: none"> <input type="radio"/> HP 34401A MULTIMETER <input type="radio"/> HP 4195 NETWORKS/SPECTRUM ANALYZER <input type="radio"/> HP 42841 BIAS CURRENT SOURCE <input type="radio"/> HP 4285A LCR METER <input type="radio"/> HP 4286A RF LCR METER <input checked="" type="radio"/> HP 4291A RF IMPEDANCE / MATERIAL ANALYZER <input type="radio"/> HP 4338A MILLION OHM METER <input type="radio"/> HP 6632A DC POWER SUPPLY <input type="radio"/> HP4284A PRECISION LCR METER
Q		TEST FREQ.		MHz	
SRF		TEST FREQ.		MHz	
Rdc	0.006 Ohms Max	TEST FREQ.		MHz	
Idc	4000mA MAX.	TEST FREQ.		MHz	
		TEST FREQ.			
DRAWN BY :		CHECKED BY :		APPROVED BY :	
BW		JOE HUFF		J Ng	