


CRYSTAL OSCILLATOR

PART NUMBERING GUIDE

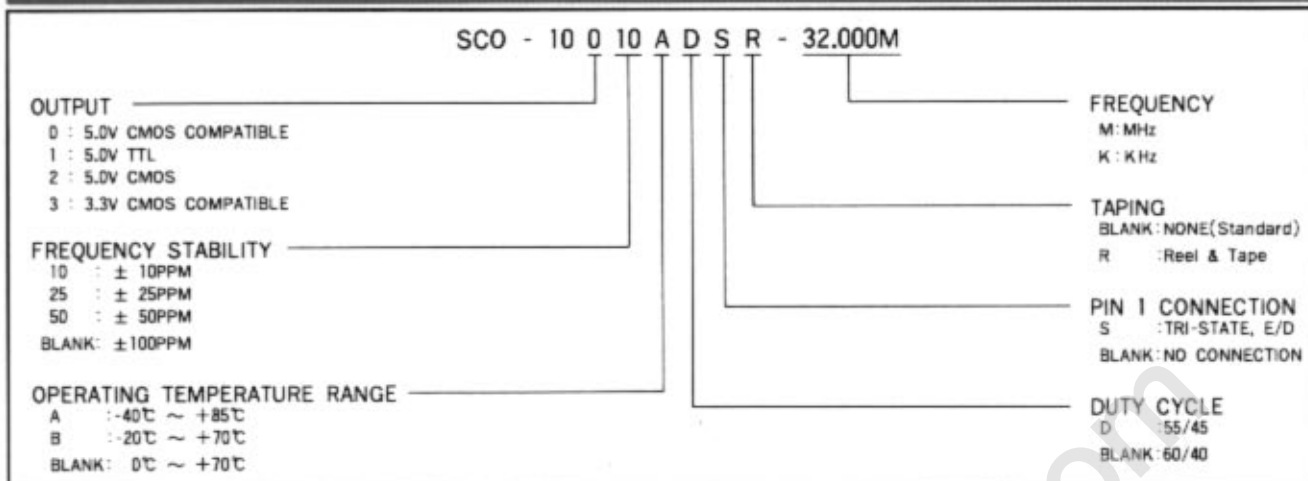

ELECTRICAL SPECIFICATIONS

OUTPUT		TTL & CMOS COMPATIBLE
Frequency Range		1.5 MHz ~ 70 MHz
Frequency Stability		±25 ~ ±100 PPM
Operating Temp. Range		0°C ~ 70°C
Power Supply	Osc. Voltage	+5.0VDC ±10% +3.3VDC ±10%
	Osc. Current	20~80mA MAX
Output	Duty cycle	50% ±10% (TTL:1.4V,C-MOS:1/2VDD)
	Rise/Fall time	10nS MAX
	Fan out	1 to 10 TTL, 15pF
Option		Duty 55/45, Tri-state

MECHANICAL DIMENSIONS

