


# Transmissive Optoswitch

## Slotted Switch — .395 High

# VTL11D1 - D7



### PRODUCT DESCRIPTION

This series of interrupter type transmissive optoswitches combines an infrared emitting diode (IRED) with an NPN phototransistor in a one piece, sealed, IR transmitting plastic case. The sealed construction improves resistance to debris and moisture. Internal apertures over detector and/or emitter are available to increase detector and/or emitter are available to increase resolution. These devices are furnished with P.C. board mount leads. Refer to VTL13 for devices with flying leads.

### ABSOLUTE MAXIMUM RATINGS

Maximum Temperatures



Storage and Operating: ..... 40°C to 85°C

Lead Soldering Temperature: ..... 260°C  
(1.6 mm from case, 5 seconds max.)

### GENERAL CHARACTERISTICS (@ 25°C unless otherwise noted)

Parameter	Symbol	Test Conditions	Input IRED	Output Detector
Reverse Voltage	$V_R$	$I_R = 100 \mu A$	2.0 V Min.	
Continuous Forward Current	$I_F$	Derate 0.73 mA / °C above 30°C	40 mA Max.	
Forward Voltage Drop	$V_F$	$I_F = 20 \text{ mA}$	1.8 V Max.	
Collector Breakdown Voltage	$V_{BR(CEO)}$	$I_C = 100 \mu A$		30 V Min.
Emitter Breakdown Voltage	$V_{BR(ECO)}$	$I_C = 100 \mu A$		5.0 V Min.
Power Dissipation	$P_D$	Derate 0.91 mW / °C above 30°C		50 mW Max.

### PACKAGE DIMENSIONS inch (mm)

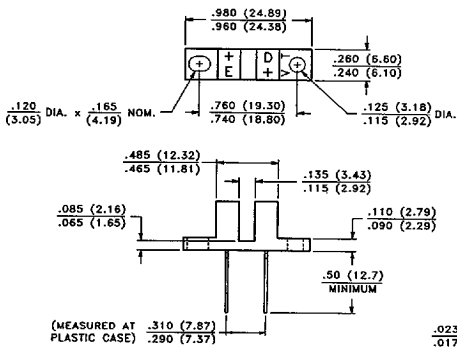

3030609 0001524 010

# ELECTRO - OPTICAL CHARACTERISTICS @ 25°C (See also curves, pages 34 & 35)

PART NO. <sup>1</sup>	LIGHT CURRENT, I <sub>p</sub>			DARK CURRENT <sup>1</sup>			SATURATION VOLTAGE			APERTURE COMBINATION <sup>2</sup>	
	mA Min.	Test Conditions		nA Max.	Test Conditions		Volts Max.	Test Conditions		Emitter	Detector
		I <sub>f</sub> mA	V <sub>CE</sub> Volts		I <sub>f</sub> mA	V <sub>CE</sub> Volts		I <sub>f</sub> mA	I <sub>c</sub> mA		
VTL11D1	0.5	20	5	100	0	10	0.4	20	0.25	NONE	NONE
VTL11D1-20	0.15	20	5	100	0	10	0.4	20	0.25	.020" WIDE	NONE
VTL11D3	2.0	20	5	100	0	10	0.4	20	1.8	NONE	NONE
VTL1103-20	0.6	20	5	100	0	10	0.4	20	1.8	.020" WIDE	NONE
VTL1105-20	0.15	20	5	100	0	10	0.4	20	0.25	.020" WIDE	.010" WIDE
VTL1106-20	0.075	20	5	100	0	10	0.4	20	0.25	.020" WIDE	.005" WIDE
VTL11D7	0.75	20	5	100	0	10	0.4	20	0.25	NONE	.020" WIDE
VTL11D7-20	0.225	20	5	100	0	10	0.4	20	0.25	.020" WIDE	.020" WIDE

### Notes:

- <sup>1</sup> The dark current is measured with the part totally shielded from ambient light. With 2150 lux (200 fc) from a cool white fluorescent lamp falling on the part, the typical dark current will be 3 μA for VTL11D devices. Equivalent light from an incandescent lamp will result in significantly greater currents.
- <sup>2</sup> The apertures used for these slotted switches are .040" (1.02 mm) high.
3. The case material is polysulfone and should be cleaned with alcohol or freon TF only. Avoid chlorinated hydrocarbons and solvents such as acetone or toluene, as damage may result.
- <sup>4</sup> VTL11D7-20 accommodates most applications. The other parts in this series are available only for specialized, high volume applications.

0897

37

■ 3030609 0001525 T57 ■