


Test Condition: Temp= $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$ Relative Humidity= $65 \pm 5\%$

No.	Item	Specification
1	Resonant Frequency	4.1 ± 0.5 KHz
2	Operating Volt. Range	$3 \sim 16$ VDC
3	Current Consumption	Max 7 mA at 12 VDC
4	Sound Pressure Level	Min 70 dB at 30cm/12VDC
5	Rated Voltage	12 VDC
6	Tone	Continuous at 12 VDC
7	Operating Temp.	$-20 \sim +70^{\circ}\text{C}$
8	Storage Temp.	$-30 \sim +80^{\circ}\text{C}$
9	Dimension	$\phi 13.7 \times \text{H}7.6$ mm
10	Weight (Max)	1.0 gram
11	Material	NORYL (BLACK)
12	Terminal	Pin Type

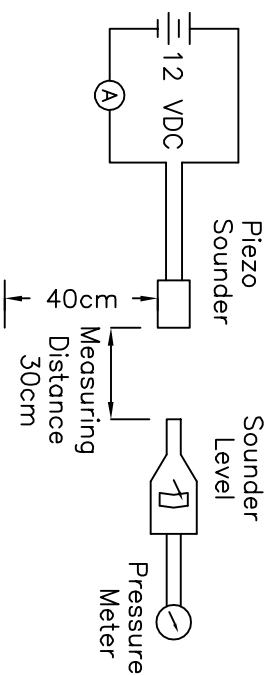

Measuring Method
 S.P.L. Measuring Circuit
 Mic: RION S.P.L. meter UC30 or equivalent


CUI INC
 9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 372-1266
 Website: www.cui.com

TITLE: Piezo Audio Indicator

PART NO. CEP-2242 UNITS: Millimeters

DRAWN BY: Todd White APPROVED BY: SCALE: None

Tolerance: ± 0.5

PC FILE NAME: cep-2242.dwg

COPYRIGHT 2001 BY CUI INC.