

## PNP SILICON POWER TRANSISTORS

...designed for use in audio frequency power amplifier applications

### FEATURES:


- \* Low Collector-Emitter Saturation Voltage  
 $V_{CE(sat)} = 1.0V(\text{Max}) @ I_C = 3.0A, I_B = 0.3A$
- \* DC Current Gain  
 $hFE = 60-200 @ I_C = 0.5A$
- \* Complementary to NPN 2SD880

**PNP  
2SB834**


**3.0 AMPERE  
POWER  
TRANSISTORS  
60 VOLTS  
30 WATTS**

### MAXIMUM RATINGS

Characteristic	Symbol	2SB834	Unit
Collector-Emitter Voltage	$V_{CEO}$	60	V
Collector-Base Voltage	$V_{CBO}$	60	V
Emitter-Base Voltage	$V_{EBO}$	7.0	V
Collector Current - Continuous - Peak	$I_C$ $I_{CM}$	3.0 6.0	A
Base current	$I_B$	0.5	A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	30 0.24	W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	$T_J, T_{STG}$	-55 to +150	$^\circ\text{C}$



**TO-220**




PIN 1.BASE  
2.COLLECTOR  
3.EMITTER  
4.COLLECTOR(CASE)

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	4.16	$^\circ\text{C/W}$

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.31
B	9.78	10.42
C	5.01	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	3.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.97
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90

FIGURE -1 POWER DERATING

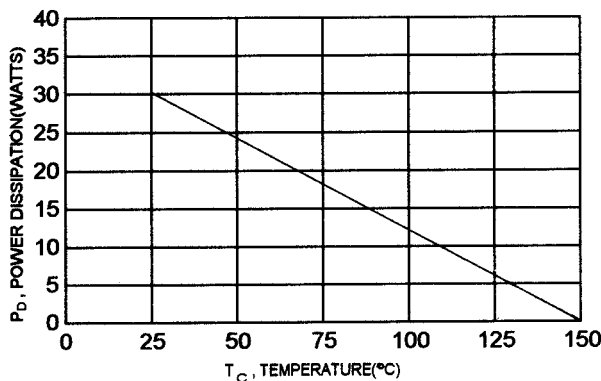

ELECTRICAL CHARACTERISTICS (  $T_c = 25^\circ\text{C}$  unless otherwise noted )

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

## OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage ( $I_C = 50 \text{ mA}$ , $I_B = 0$ )	$V_{(BR)CEO}$	60		V
Emitter-Base Breakdown Voltage ( $I_B = 1.0 \text{ mA}$ , $I_C = 0$ )	$V_{(BR)EBO}$	7.0		V
Collector Cutoff Current ( $V_{CB} = 60 \text{ V}$ , $I_E = 0$ )	$I_{CBO}$		100	$\mu\text{A}$
Emitter Cutoff Current ( $V_{EB} = 7.0 \text{ V}$ , $I_C = 0$ )	$I_{EBO}$		100	$\mu\text{A}$

## ON CHARACTERISTICS (1)

DC Current Gain ( $I_C = 0.5 \text{ A}$ , $V_{CE} = 5.0 \text{ V}$ )* ( $I_C = 3.0 \text{ A}$ , $V_{CE} = 5.0 \text{ V}$ )	$h_{FE(2)}$ $h_{FE}$	60 20	200	
Collector-Emitter Saturation Voltage ( $I_C = 3.0 \text{ A}$ , $I_B = 300 \text{ mA}$ )	$V_{CE(sat)}$		1.0	V
Base-Emitter On Voltage ( $I_C = 0.5 \text{ A}$ , $V_{CE} = 5.0 \text{ V}$ )	$V_{BE(on)}$		1.0	V

## DYNAMIC CHARACTERISTICS

Current-Gain-Bandwidth Product ( $I_C = 0.5 \text{ A}$ , $V_{CE} = 5.0 \text{ V}$ , $f = 1.0 \text{ MHz}$ )	$f_T$	5.0		MHz
--	-------	-----	--	-----


## SWITCHING CHARACTERISTICS

Turn-on Time	$V_{CC} = 30 \text{ V}$ , $I_C = 2.0 \text{ A}$ $I_{B1} = -I_{B2} = 200 \text{ mA}$ $PW = 20 \mu\text{s}$	$t_{on}$	0.7	$\mu\text{s}$
Storage Time		$t_s$	2.0	$\mu\text{s}$
Fall Time		$t_f$	0.9	$\mu\text{s}$


(1) Pulse Test: Pulse Width  $\approx 300 \mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ \*  $h_{FE(2)}$  Classification :

60	O	120	100	Y	200
----	---	-----	-----	---	-----


$I_c - V_{ce}$

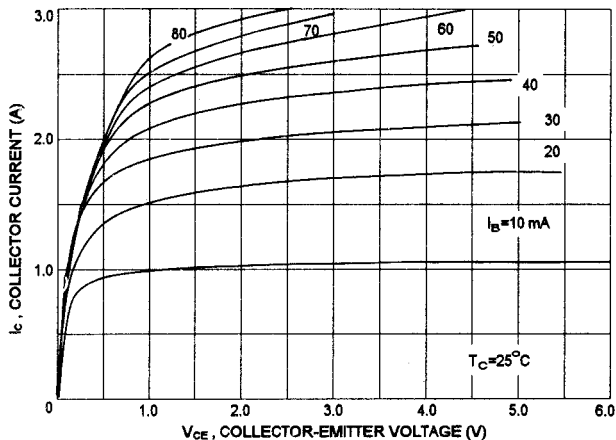


DC CURRENT GAIN

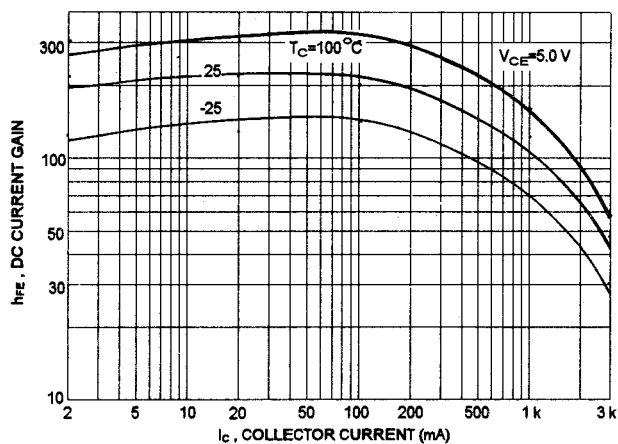


$I_c - V_{be}$

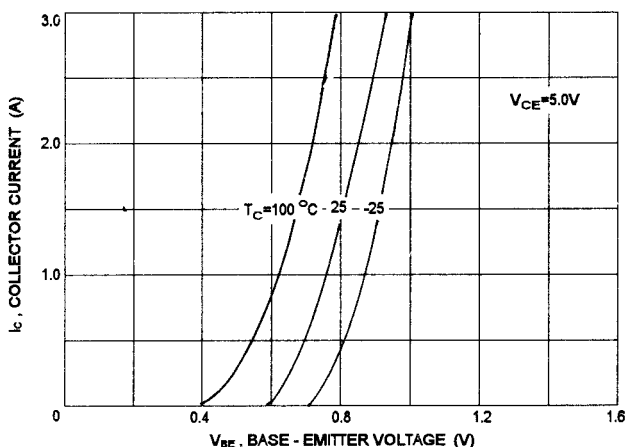

$V_{CE(sat)} - I_c$

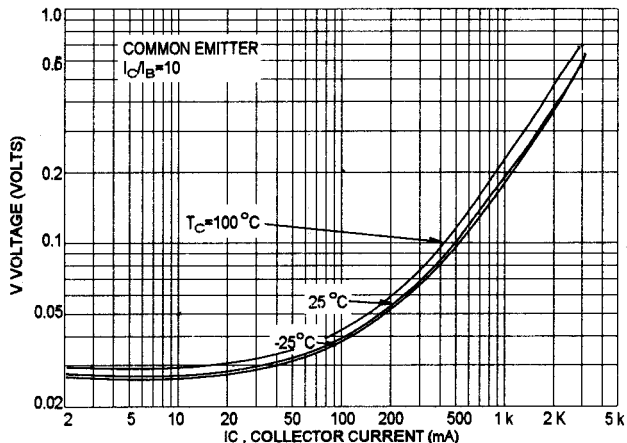

ACTIVE-REGION SAFE OPERATING AREA (SOA)

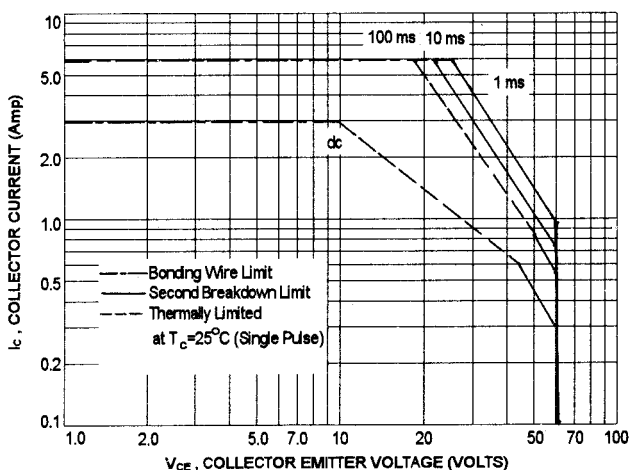

There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate  $I_c - V_{ce}$  limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of SOA curve is base on  $T_{J(PK)} = 150^\circ\text{C}$ ;  $T_c$  is variable depending on conditions. second breakdown pulse limits are valid for duty cycles to 10% provided  $T_{J(PK)} < 150^\circ\text{C}$ . At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.