


- Operating Temperature : 0°C to 70°C
- Hipot : 1500 Vrms


Electrical Parameters @ 25° C

Primary OCL (mH Min.)	Primary Et-Constant (V- μ Sec. Min.)	Pri. to Sec. Capacitance (pF Max.)	Leakage Inductance (μ H Max.)	Turns Ratio ($\pm 10\%$)	DCR (Max.)		
					Pri.	Sec. 1	Sec. 2
1.3	91	35	3.2 Sec.1 & Sec.2 Shorted	1:1:1	4.5	4.7	5.0

Package

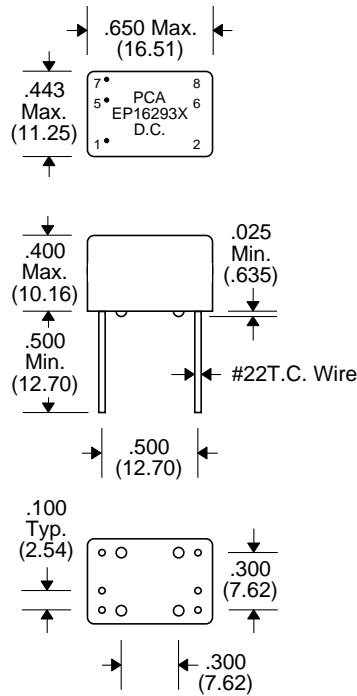

Schematic



Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$