





| Type | BMT-1606WS | BMT-1612WS |
|--------------------------------------|-------------------|------------|
| Rated Voltage(V) | 6 | 12 |
| Operating Voltage(V) | 3~12 | 6~18 |
| ◆Rated Current(mA) | < 40 | |
| Coil Resistance(Ω) | 45±7 | 115±17 |
| ◇Coil Impedance(Ω) | 110 | 200 |
| ◆Sound Output at 10cm(dB) | > 85 | |
| Resonant Frequency(Hz) | 2000~3000(> 85dB) | |
| Operating Temperature($^{\circ}$ C) | -40~+85 | |
| Storage Temperature($^{\circ}$ C) | -40~+85 | |
| Weight(g) | 7 | |

- ◆ Value applying rated voltage(2048Hz, 1/2 duty, square wave)
- ◇ Value applying(2048Hz, sine wave, measuring current 60 μ A)

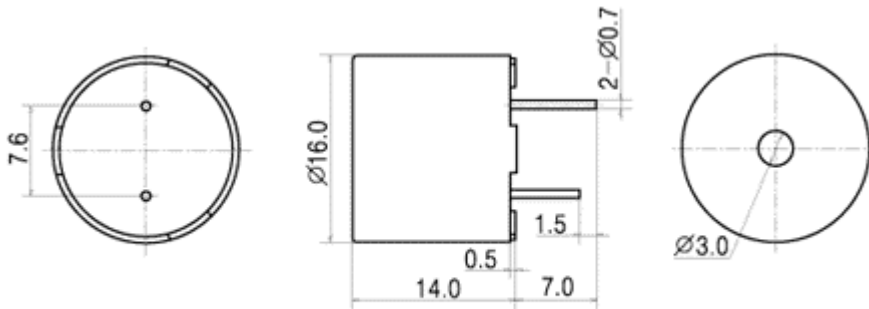

Unit:mm

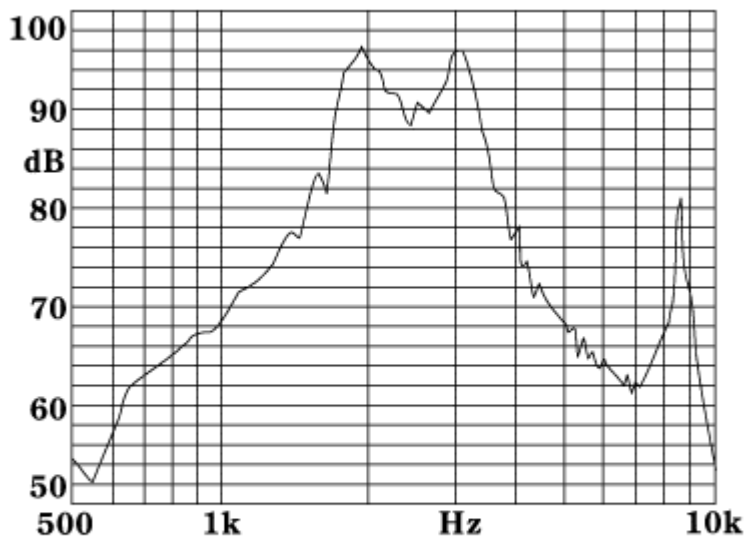

Applied voltage:6V, 1/2 duty, square wave
 Distance for measurement:10cm