


SILICON EPITAXIAL NPN TRANSISTOR

2N5154N2A

- Hermetic Ceramic Surface Mount SMD1 Package
- High Reliability and Space Screening Options Available

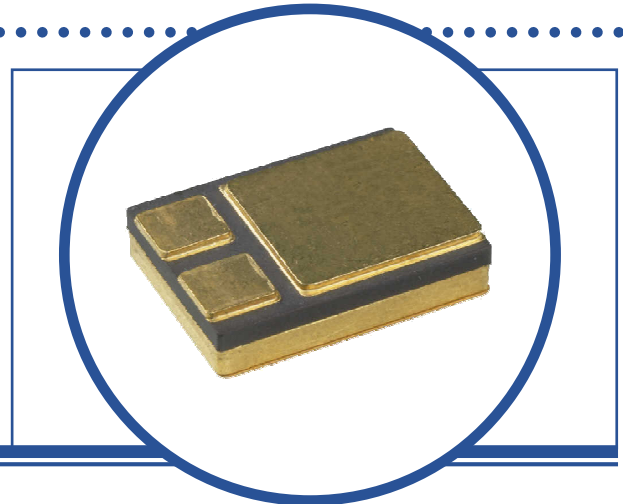

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C unless otherwise stated)

V _{CB0}	Collector – Base Voltage (I _E = 0)	100V
V _{CEO}	Collector – Emitter Voltage (I _B = 0)	80V
V _{EBO}	Emitter – Base Voltage	5.5V
I _C	Continuous Collector Current	2A
I _{CM}	Peak Collector Current ⁽¹⁾	10A
P _D	Total Power Dissipation at T _C = 25°C	70W
	Derate Above 25°C	400 mW/°C
T _J	Junction Temperature Range	-65 to +200°C
T _{stg}	Storage Temperature Range	-65 to +200°C

THERMAL PROPERTIES

Symbols	Parameters	Min.	Typ.	Max.	Units
R _{θJC}	Thermal Resistance, Junction To Case (T _C = 25°C)			2.5	°C/W

(1) This value applies for P_w ≤ 8.3ms, duty cycle ≤ 1%.

SILICON EPITAXIAL NPN TRANSISTOR 2N5154N2A

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

Symbols	Parameters	Test Conditions	Min.	Typ	Max.	Units
$V_{(BR)CEO}^{(2)}$	Collector-Emitter Breakdown Voltage	$I_C = 100\text{mA}$	80			V
I_{CES}	Collector Cut-Off Current	$V_{CE} = 60\text{V}$ $V_{BE} = 0$			1.0	μA
		$V_{CE} = 100\text{V}$ $V_{BE} = 0$			1.0	mA
I_{CEX}	Collector Cut-Off Current	$V_{CE} = 60\text{V}$ $V_{BE} = -2\text{V}$ $T_C = 150^\circ\text{C}$			25	μA
I_{CEO}	Collector Cut-Off Current	$V_{CE} = 60\text{V}$ $I_B = 0$			50	
I_{EBO}	Emitter Cut-Off Current	$V_{EB} = 4\text{V}$ $I_C = 0$			1.0	mA
		$V_{EB} = 5.5\text{V}$ $I_C = 0$			1.0	
$h_{FE}^{(2)}$	Forward-current transfer ratio	$I_C = 50\text{mA}$ $V_{CE} = 5\text{V}$	50			-
		$I_C = 2.5\text{A}$ $V_{CE} = 5\text{V}$ $T_C = -55^\circ\text{C}$	70		200	
		$I_C = 5\text{A}$ $V_{CE} = 5\text{V}$	40			
$V_{BE}^{(2)}$	Base-Emitter Voltage	$I_C = 2.5\text{A}$ $V_{CE} = 5\text{V}$			1.45	V
$V_{BE(sat)}^{(2)}$	Collector-Emitter Saturation Voltage	$I_C = 2.5\text{A}$ $I_B = 250\text{mA}$			1.45	
		$I_C = 5\text{A}$ $I_B = 500\text{mA}$			2.2	
$V_{CE(sat)}^{(2)}$	Base-Emitter Saturation Voltage	$I_C = 2.5\text{A}$ $I_B = 250\text{mA}$			0.75	
		$I_C = 5\text{A}$ $I_B = 500\text{mA}$			1.5	

DYNAMIC CHARACTERISTICS

$ h_{fe} $	Magnitude of common-emitter, small-signal short-circuit, forward-current transfer ratio	$I_C = 500\text{mA}$ $V_{CE} = 5\text{V}$ $f = 20\text{MHz}$		1.2		-
h_{fe}	Small-Signal Current Gain	$I_C = 100\text{mA}$ $V_{CE} = 5\text{V}$ $f = 1.0\text{KHz}$	50			-
C_{obo}	Output Capacitance	$V_{CB} = 10\text{V}$ $I_E = 0$ $f = 1.0\text{MHz}$			250	pF
t_{on}	Turn-On Time	$V_{CC} = 30\text{V}$ $I_C = 5\text{A}$ $I_{B1} = 500\text{mA}$ $I_{B2} = -I_{B1}$ $R_L = 6\Omega$			0.5	μS
t_s	Storage Time				1.4	
t_f	Fall Time				0.5	
t_{off}	Turn-Off Time				1.5	


Notes

(2) Pulse Width $\leq 300\mu\text{s}$, $\delta \leq 2\%$

SILICON EPITAXIAL NPN TRANSISTOR 2N5154N2A

MECHANICAL DATA

Dimensions in mm (inches)

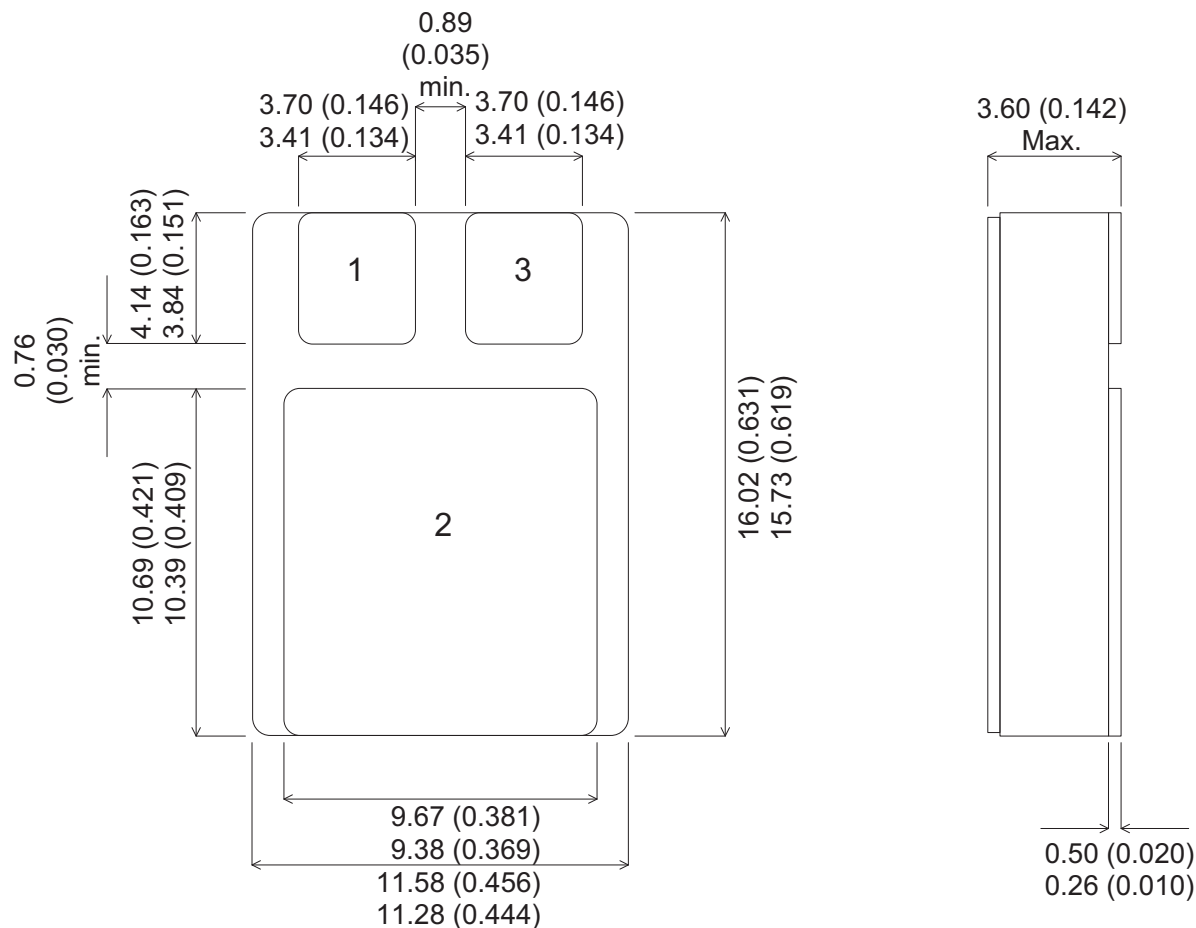

SMD1 (TO-276AB)

Pad 1 - Emitter Pad 2 - Collector Pad 3 - Base