


Right-angle SMT type 15-contacts male connector for PCB RMC-EA15PMY-OM15-M() ()

For mobile interfaces

For PCB, with Location Peg

Right-angle SMT

Conforming to PCMCIA/JEITA

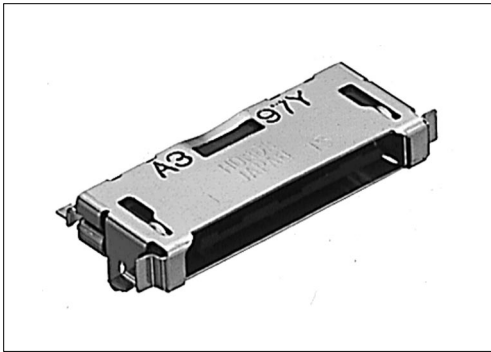

● Configuration of product Part No.

RMC- EA 15 PMY- OM15- M () ()

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series name
- ② EA: Contact, Hold down, Locking hardware, One-piece molded, EMI-filtered
- ③ No. of contacts: 15
- ④ PMY: SMT type male with location pegs
- ⑤ Offset
OM15: Offset 1.5 mm
- ⑥ M: One-piece molded key
- ⑦ Form of polarization keys:
A: A type, B: B type, C: C type
Locations of polarization keys:
12: 12, 13: 13, 23: 23, Key-less
(C type: 1: 1, 2: 2, 12: 12, Key-less)

- ⑧ Insulator colors
Applicable only to models with the MB form of key (For the models with other key forms, these insulator colors are all black.)
None: Brown (standard)
BK : Black

	Forms of keys
A type	
B type	
C type	

Terminal No.

PCB dimensions for reference purposes

● Components

①	Contacts
②	Insulator
③	Shell
④	Locking hardware
⑤	Hold down

- Use this connector as a small sized interface connector for mobile computers and others.
- Some models may not be quickly supplied depending on the configuration of part number (key position and offset dimension). For the availability of the model required, consult your supplier.

● Locations of polarization keys

Part No.	Key location	Identification Examples	Mating connectors
RMC-EA15PMY-OM15-M()	-	A	RMC-E15F4S-LC5 RMC-E15F4S-LC5-M() ()
RMC-EA15PMY-OM15-M()1	1	A1	RMC-E15F4S-LC5-M()23 RMC-E15F4S-LC5-MC2
RMC-EA15PMY-OM15-M()2	2	A2	RMC-E15F4S-LC5-M()13 RMC-E15F4S-LC5-MC1
RMC-EA15PMY-OM15-M()3	3	A3	RMC-E15F4S-LC5-M()12

RMC