

Product Specifications

L4P43A-PDMDF-5M

LDF4-50A SureFlex™ Jumper with interface types 7-16 DIN Male and 7-16 DIN Female, 5 m



CHARACTERISTICS


General Specifications

Body Style, Connector A	Straight
Body Style, Connector B	Straight
Cable Family	LDF4-50A
Interface, Connector A	7-16 DIN Male
Interface, Connector B	7-16 DIN Female
Length	5.000 m 16.404 ft
Attachment, Connector B	Field attachment

Electrical Specifications

DTF, Connector A	-32.00 dB
DTF, Connector B	-32.00 dB

Jumper Assembly Sample Label

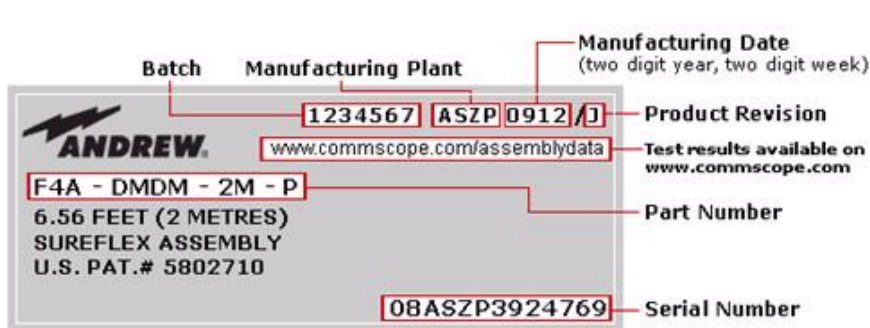

Return Loss/VSWR

Frequency Band	VSWR	Return Loss (dB)
800–970 MHz	1.15	23.13
1420–1530 MHz	1.15	23.13
1700–2180 MHz	1.15	23.13

Regulatory Compliance/Certifications

www.commscope.com/andrew

Product Specifications

L4P43A-PDMDF-5M



Agency

RoHS 2002/95/EC
China RoHS SJ/T 11364-2006
ISO 9001:2008

Classification

Compliant by Exemption
Above Maximum Concentration Value (MCV)
Designed, manufactured and/or distributed under this quality management system



INCLUDED PRODUCTS

LDF4-50A



LDF4-50A, HELIAX® Low Density Foam Coaxial Cable, corrugated copper, 1/2 in, black PE jacket
