


**SSL-LX305F4XX SERIES T-3mm FLANGELESS LED LAMPS**

LUMEX PART NBR	EMITTED COLOR		EPOXY LENS COLOR	BRIGHTNESS		VIEW ANGLE	VF@20mA	
	PEAK(nm)	RED		TYP.(mcd.)	I(mA)		TYP.	MAX
SSL-LX305F4ID	RED	635	RED DIFF.	15	20	80	2.0	2.8
SSL-LX305F4SRD	RED	660	RED DIFF.	70	20	80	1.7	2.2
SSL-LX305F4GD	GREEN	565	GREEN DIFF.	10	20	80	2.1	2.8
SSL-LX305F4YD	YELLOW	585	YELLOW DIFF.	10	20	80	2.1	2.8
<b>BI-COLOR OPTIONS</b>								
SSL-LX305F4IGW	RED/GREEN	635/565	WHITE DIFF.		20/20	80	2.0	2.8
<b>LOW CURRENT OPTIONS</b>								
SSL-LX305F4LID	RED	635	RED DIFF.	1.5	2	80	2.0	2.8
SSL-LX305F4LGD	GREEN	565	GREEN DIFF.	1.5	2	80	2.1	2.8
SSL-LX305F4LYD	YELLOW	585	YELLOW DIFF.	1.5	2	80	2.1	2.8
SSL-LX305F4ERD	RED	660	RED DIFF.	5.0	2	80	1.7	2.2


See pages 8 -14 for Max. operating limits and operating curves

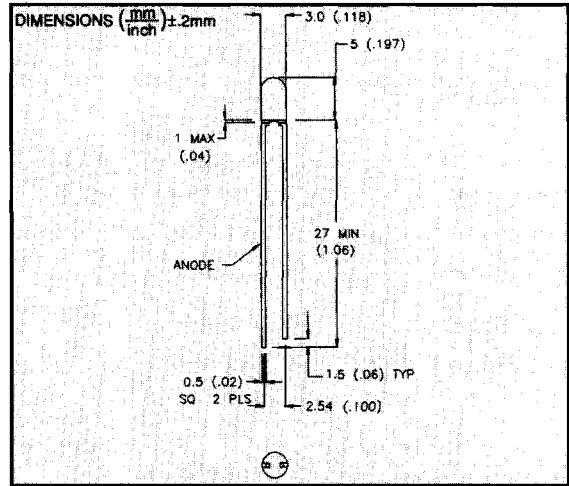

**SSF-LX3P74XX SERIES T-3mm RIGHT ANGLE PIPE LENS LED LAMP**

LUMEX PART NBR	EMITTED COLOR		EPOXY LENS COLOR	BRIGHTNESS		VIEW ANGLE	VF@20mA	
	PEAK(nm)	RED		TYP.(mcd.)	I(mA)		TYP.	MAX
SSF-LX3P74ID	RED	635	RED DIFF.		20	100	2.0	2.8
SSF-LX3P74SRD	RED	660	RED DIFF.		20	100	1.7	2.2
SSF-LX3P74GD	GREEN	565	GREEN DIFF.		20	100	2.1	2.8
SSF-LX3P74YD	YELLOW	585	YELLOW DIFF.		20	100	2.1	2.8
<b>BI-COLOR OPTIONS</b>								
SSF-LX3P74IGW	RED/GREEN	635/565	WHITE DIFF.		20/20	100	2.0	2.8
<b>BLINKING OPTIONS 3-15VDC RANGE (2.5-1.5Hz FLASHING RATE)</b>								
SSF-LX3P74BID	RED	635	RED DIFF.	8.0	9V	100	9.0	
SSF-LX3P74BGD	GREEN	565	GREEN DIFF.	8.0	9V	100	9.0	
SSF-LX3P74BYD	YELLOW	585	YELLOW DIFF.	8.0	9V	100	9.0	
SSF-LX3P74BRD	RED	660	RED DIFF.	8.0	9V	100	9.0	

See page 8-14 for Max. operating limits and operating curves

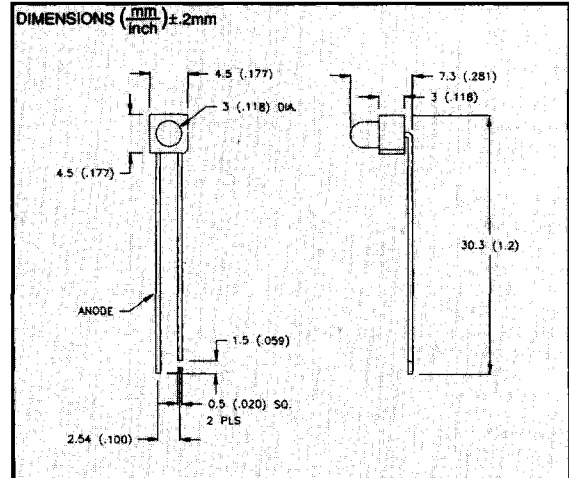

**SSL-LX3054XX-XXV SERIES T-3mm LEDs 5-6, 12-14VDC OPER.**

LUMEX PART NBR	EMITTED COLOR		EPOXY LENS COLOR	BRIGHTNESS		VIEW ANGLE	VF@20mA	
	PEAK(nm)	RED		TYP.(mcd.)	I(mA)		TYP.	MAX
SSL-LX3054ID-5V	RED	635	RED DIFF.	9	5V/10	80	5	
SSL-LX3054ID-12V	RED	635	RED DIFF.	9	12V/10	80	12	
SSL-LX3054IT-5V	RED	635	RED TRANSP.	25	5V/10	20	5	
SSL-LX3054IT-12V	RED	635	RED TRANSP.	25	12V/10	20	12	
SSL-LX3054GD-5V	GREEN	565	GREEN DIFF.	8	5V/10	80	5	
SSL-LX3054GD-12V	GREEN	565	GREEN DIFF.	8	12V/10	80	12	
SSL-LX3054GT-5V	GREEN	565	GREEN TRANSP.	20	5V/10	20	5	
SSL-LX3054GT-12V	GREEN	565	GREEN TRANSP.	20	12V/10	20	12	
SSL-LX3054YD-5V	YELLOW	585	YELLOW DIFF.	10	5V/10	80	5	
SSL-LX3054YD-12V	YELLOW	585	YELLOW DIFF.	10	12V/10	80	12	
SSL-LX3054YT-5V	YELLOW	585	YELLOW TRANSP.	24	5V/10	20	5	
SSL-LX3054YT-12V	YELLOW	585	YELLOW TRANSP.	24	12V/10	20	12	

See pages 8 -14 for Max. operating limits and operational curves

