
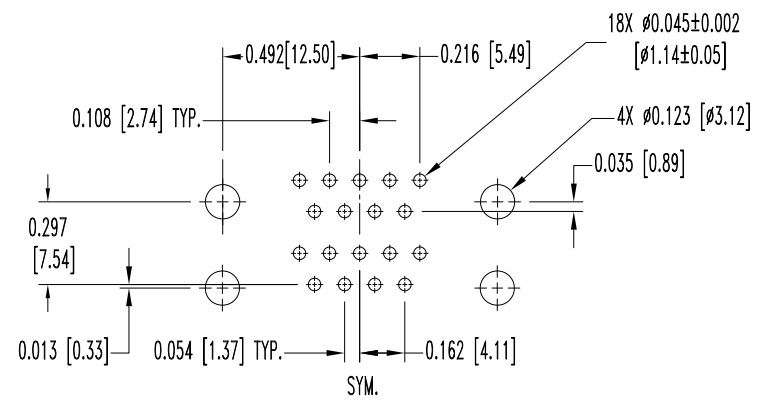
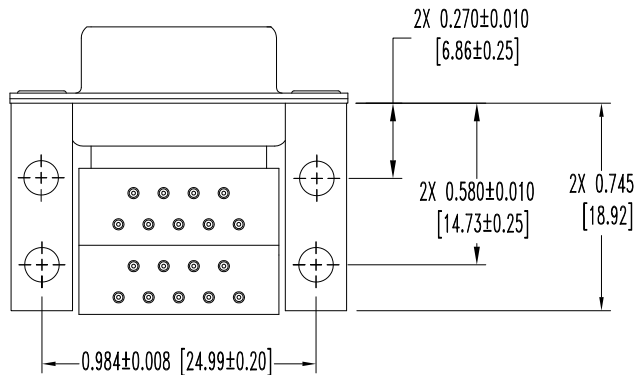
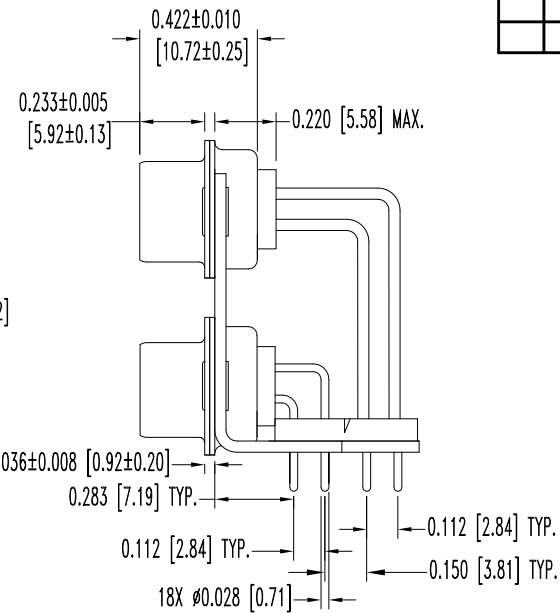


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
3-11-09	NC	ECO 30763	RCW	BS	COLE

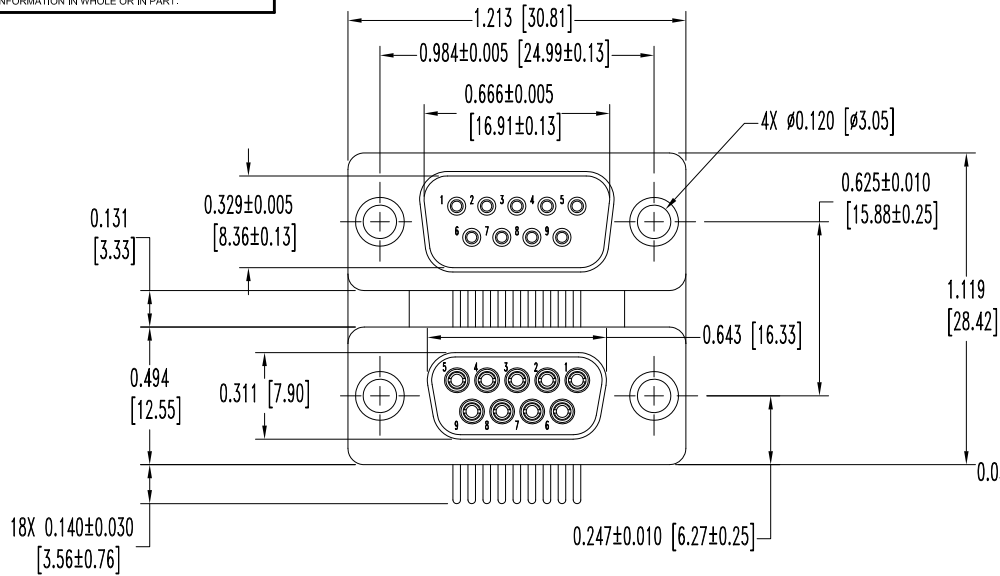

CONTACT HOLE PATTERN

NOTES:

- MATERIALS AND FINISHES:
 INSULATORS: NYLON RESIN UL 94V-0, BLACK COLOR.
 CONTACTS: PRECISION MACHINED BRASS ALLOY, GOLD FLASH OVER NICKEL PLATE.
 SHELLS: STEEL WITH TIN PLATE.
 MOUNTING BRACKETS: BRASS WITH TIN PLATE.
 ALIGNMENT BAR: NYLON RESIN, UL 94V-0, BLACK COLOR.
- ELECTRICAL CHARACTERISTICS:
 CONTACT CURRENT RATING: 5 AMPERES NOMINAL.
 INITIAL CONTACT RESISTANCE: 0.008 OHMS MAXIMUM.
 INSULATOR RESISTANCE: 5 G OHMS.
- TEMPERATURE RANGE: -55°C TO +125°C.
- CONNECTOR IS ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

	POSITRONIC INDUSTRIES INC. www.connectpositronic.com		FSCM 28198
	DECIMAL TOL. ± 0.015 [0.38]	DPA SERIES	SCALE N.T.S.
ANGULAR TOL. ± 5°	TITLE DPA9MR6/9FR6X/AA		APPROVED BY R WILLIAMS
DATE 3-11-09	DRAWING NUMBER SK10435	REV. NC	DATE 3-11-09