

Straight through hole type male connector for PCB LPC-() (T) M ()

2 mm pitch connector
For PCB
Straight Through hole

RoHS




● Configuration of product Part No.

LPC- () (T) M ()

① ② ③ ④

- ① Series name
- ② No. of contacts: 1–30
- ③ Length No. of contact:
Refer to the table of dimensions below.
- ④ Contact plating
+S: Tin plate
G : Gold plate

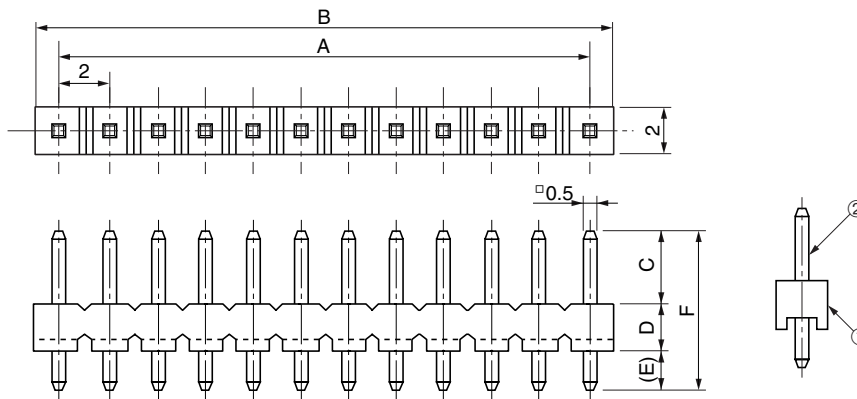

● Dimensions

Part No.	A	B	Part No.	A	B	Part No.	A	B
LPC-1(T)M()	–	2	LPC-11(T)M()	20	22	LPC-21(T)M()	40	42
LPC-2(T)M()	2	4	LPC-12(T)M()	22	24	LPC-22(T)M()	42	44
LPC-3(T)M()	4	6	LPC-13(T)M()	24	26	LPC-23(T)M()	44	46
LPC-4(T)M()	6	8	LPC-14(T)M()	26	28	LPC-24(T)M()	46	48
LPC-5(T)M()	8	10	LPC-15(T)M()	28	30	LPC-25(T)M()	48	50
LPC-6(T)M()	10	12	LPC-16(T)M()	30	32	LPC-26(T)M()	50	52
LPC-7(T)M()	12	14	LPC-17(T)M()	32	34	LPC-27(T)M()	52	54
LPC-8(T)M()	14	16	LPC-18(T)M()	34	36	LPC-28(T)M()	54	56
LPC-9(T)M()	16	18	LPC-19(T)M()	36	38	LPC-29(T)M()	56	58
LPC-10(T)M()	18	20	LPC-20(T)M()	38	40	LPC-30(T)M()	58	60

Part No.	C	D	(E)	F	Part No.	C	D	(E)	F
LPC-()M()	3	2	2.6	7.6	LPC-()T13M()	12.4	2	2.6	17
LPC-()T1M()		3.4	2.7	9.1	LPC-()T14M()	3		5	10
LPC-()T3M()		1.65	6.65	LPC-()T15M()	15.2	2.6		19.8	
LPC-()T4M()	4.5	9.5	LPC-()T16M()	3	9.6	14.6			
LPC-()T5M()	8	2.6	12.6	LPC-()T18M()	3	1.8		6.8	
LPC-()T6M()	7.5	12.1	LPC-()T19M()	8.5	2.5	13			
LPC-()T7M()	4	2.5	8.5	LPC-()T20M()	3.5	8			
LPC-()T8M()	5.5	1	LPC-()T21M()	6	1.5	9.5			
LPC-()T9M()	8	2	12	LPC-()T22M()	13.6	2.5		18.1	
LPC-()T10M()	9	2.6	13.6	LPC-()T23M()	5.4	2.6		10	
LPC-()T12M()	10		14.6						

*See note #1

*Note #1: for 16 contacts or less

Because some combinations of "Configurations of Product Part No.", are under consideration for development, please contact us for availability details.

● Components

①	Insulator
②	Contacts

Mating connectors: LPC series female connectors or shunt plugs