


Straight through hole type male connector for PCB LPC-() (T) M2()

2 mm pitch connector

For PCB

Straight Through hole

RoHS

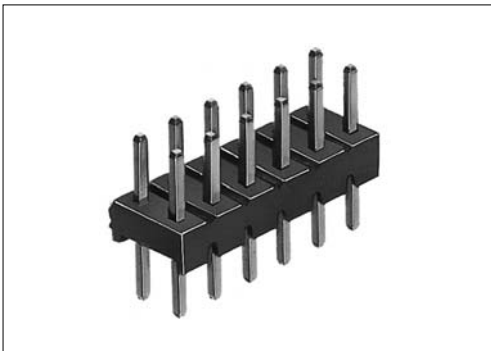




● Configuration of product Part No.

LPC- () (T) M2 ()

① ② ③ ④

- ① Series name
- ② No. of contacts: 4-60
- ③ Length No. of contact:
Refer to the table of dimensions below.
- ④ Contact plating
+S: Tin plate
G : Gold plate

● Dimensions

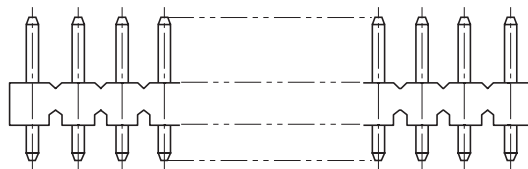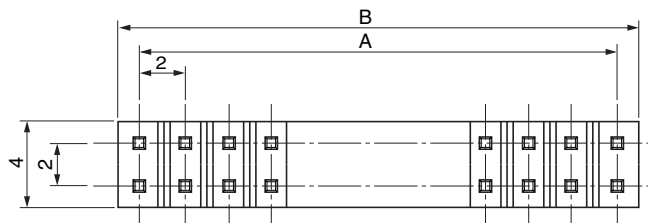

Part No.	A	B
LPC-4(T)M2()	2	4
LPC-6(T)M2()	4	6
LPC-8(T)M2()	6	8
LPC-10(T)M2()	8	10
LPC-12(T)M2()	10	12
LPC-14(T)M2()	12	14
LPC-16(T)M2()	14	16
LPC-18(T)M2()	16	18
LPC-20(T)M2()	18	20
LPC-22(T)M2()	20	22
LPC-24(T)M2()	22	24
LPC-26(T)M2()	24	26
LPC-28(T)M2()	26	28
LPC-30(T)M2()	28	30
LPC-32(T)M2()	30	32
LPC-34(T)M2()	32	34
LPC-36(T)M2()	34	36
LPC-38(T)M2()	36	38
LPC-40(T)M2()	38	40
LPC-42(T)M2()	40	42
LPC-44(T)M2()	42	44
LPC-46(T)M2()	44	46
LPC-48(T)M2()	46	48
LPC-50(T)M2()	48	50
LPC-52(T)M2()	50	52
LPC-54(T)M2()	52	54
LPC-56(T)M2()	54	56
LPC-58(T)M2()	56	58
LPC-60(T)M2()	58	60

● Components

①	Insulator
②	Contacts

Because some combinations of "Configurations of Product Part No.", are under consideration for development, please contact us for availability details.

Part No.	C	D	E
LPC-()M2()	3	(2.6)	2
LPC-()T1M2()		2.7	3.4
LPC-()T2M2()		(12)	2
LPC-()T4M2()	(4.5)		
LPC-()T7M2()	4	(2.5)	2
LPC-()T11M2()	3	(14.8)	
LPC-()T17M2()	(1)	1.4	3.4
LPC-()T18M2()	3	(1.8)	2

Mating connectors: LPC series female connectors or shunt plugs