
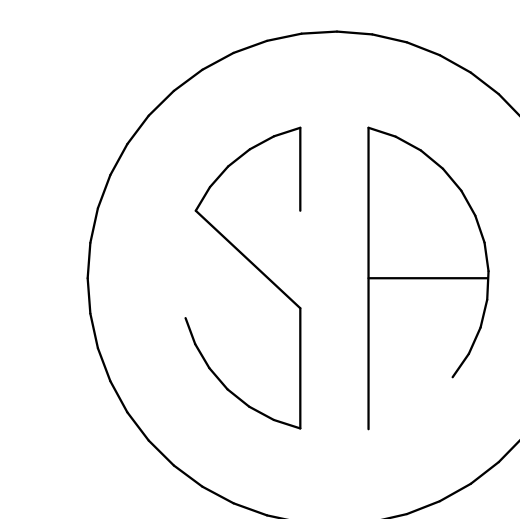


PART NUMBER	# CONDUCTOR PORTS	DIM "L"
PCSB4-2S-12Y	2	1.08
PCSB4-3S-12Y	3	1.52
PCSB4-4S-6Y	4	1.96
PCSB4-5S-6Y	5	2.39
PCSB4-6S-6Y	6	2.83
PCSB4-10S-4Y	10	4.58
PCSB4-12S-3Y	12	5.46
PCSB4-14S-2Y	14	6.34

NOTES:

- UL LISTED AND CSA CERTIFIED. DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS. MEETS OR EXCEEDS ANSI C119.4
- WIRE RANGE: #4 - 14 AWG  
ONLY ONE CONDUCTOR PER PORT ALLOWED.
- STRIP LENGTH: .56 +.06/-0
- HEX KEY SIZE: 1/8", TIGHTENING  
TORQUE #10-14 = 45 IN-LB.  
#4-#8 = 50 IN-LB.
- VOLTAGE RATING: 600 V. MAX.
- TEMPERATURE RATING: 90° C.
- CONNECTOR BLOCK BODY IS MADE FROM ALUMINUM. CLAMPING SCREWS ARE TIN PLATED. PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.
- INSULATION MATERIAL IS CLEAR PVC.
- CLAMPING SCREW ACCESS PORTS AND ALL CONDUCTOR ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.
- ALL DIMENSIONS SHOWN ARE NOMINAL.
- PACKAGE QTY: -12 = 12 PCS  
-6 = 6 PCS  
-4 = 4 PCS  
-3 = 3 PCS  
-2 = 2 PCS
- THIS PART IS ROHS COMPLIANT.

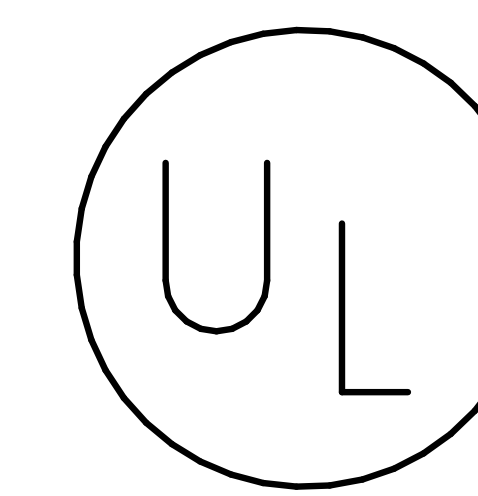

C41529\_00

**PANDUIT** CORP.

TINLEY PARK, ILLINOIS

MULTI-TAP INSULATED CONNECTORS  
PCSB #4 SINGLE SIDED SERIES

REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM
00	3/06	JHNU	LEM	DRAWING RELEASED - ROHS COMPLIANT	PC00353		

DRAWN BY JHNU	CHK'D	SCALE N/A	DRAWING NO. C41529
------------------	-------	--------------	-----------------------