


RX50 SERIES

Load Life : 150°C 1000 hours.

◆ FEATURES

- Solution for high temperature application such as automobile electronics.
- RoHS compliance.

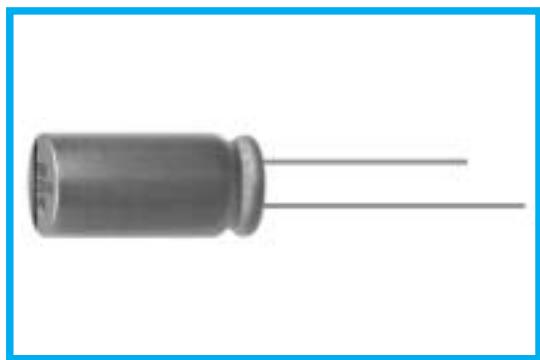

◆ SPECIFICATIONS

Items	Characteristics																											
Category Temperature Range	−40～+150°C																											
Rated Voltage Range	10～63V.DC																											
Capacitance Tolerance	±20% (20°C, 120Hz)																											
Leakage Current(MAX)	$I=0.01CV$ or $3\ \mu A$ whichever is greater. (After 5 minutes application of rated voltage)																											
Dissipation Factor(MAX) (tan δ)	$I=\text{Leakage Current}(\ \mu A)$ $C=\text{Rated Capacitance}(\ \mu F)$ $V=\text{Rated Voltage}(V)$ <table border="1"> <tr> <td>Rated Voltage (V)</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td>tan δ</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.12</td> <td>0.11</td> </tr> </table> (20°C, 120Hz)							Rated Voltage (V)	10	16	25	35	50	63	tan δ	0.20	0.16	0.14	0.12	0.12	0.11							
Rated Voltage (V)	10	16	25	35	50	63																						
tan δ	0.20	0.16	0.14	0.12	0.12	0.11																						
Endurance	After applying rated voltage with rated ripple current for 1000hrs at 150°C, the capacitors shall meet the following requirements. <table border="1"> <tr> <td>Capacitance Change</td> <td colspan="6">Within ±30% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td colspan="6">Not more than 300% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td colspan="6">Not more than the specified value.</td> </tr> </table>							Capacitance Change	Within ±30% of the initial value.						Dissipation Factor	Not more than 300% of the specified value.						Leakage Current	Not more than the specified value.					
Capacitance Change	Within ±30% of the initial value.																											
Dissipation Factor	Not more than 300% of the specified value.																											
Leakage Current	Not more than the specified value.																											
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated Voltage (V)</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td>$Z(-25^\circ C)/Z(20^\circ C)$</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>$Z(-40^\circ C)/Z(20^\circ C)$</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> </tr> </table> (120Hz)							Rated Voltage (V)	10	16	25	35	50	63	$Z(-25^\circ C)/Z(20^\circ C)$	2	2	2	2	2	2	$Z(-40^\circ C)/Z(20^\circ C)$	4	4	4	4	4	4
Rated Voltage (V)	10	16	25	35	50	63																						
$Z(-25^\circ C)/Z(20^\circ C)$	2	2	2	2	2	2																						
$Z(-40^\circ C)/Z(20^\circ C)$	4	4	4	4	4	4																						

◆ MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

Frequency (Hz)	60(50)	120	1k	10k	100k≤
Coefficient	47～220 μF	0.30	0.40	0.75	0.92
	330～1000 μF	0.40	0.50	0.80	0.95
					1.00


◆ PART NUMBER

_____ $\square\square\square$ RX50
 Rated Voltage Series _____ $\square\square\square\square\square$ _____ \square Capacitance Tolerance _____ $\square\square\square$ Option _____ $\square\square$ Lead Forming D XL
 Case Size



DIMENSIONS

(mm)

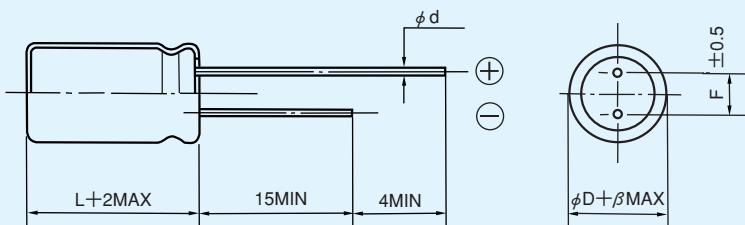

ϕD	10	12.5
ϕd		0.6
F		5.0
β	0.5	1.0

◆ STANDARD SIZE, RATED RIPPLE CURRENT

Size ϕ D×L(mm), Ripple Current (mA r.m.s./150°C, 100kHz)