
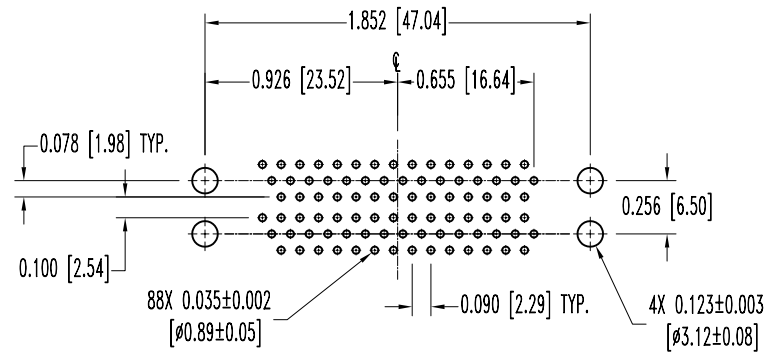
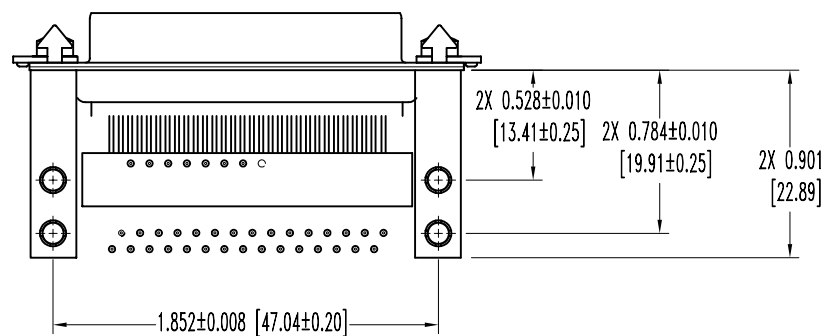



SK5970

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.


DATE	REV	REVISION RECORD	APP	DR	CK
1-28-05	NC	ECO 23596		YK	

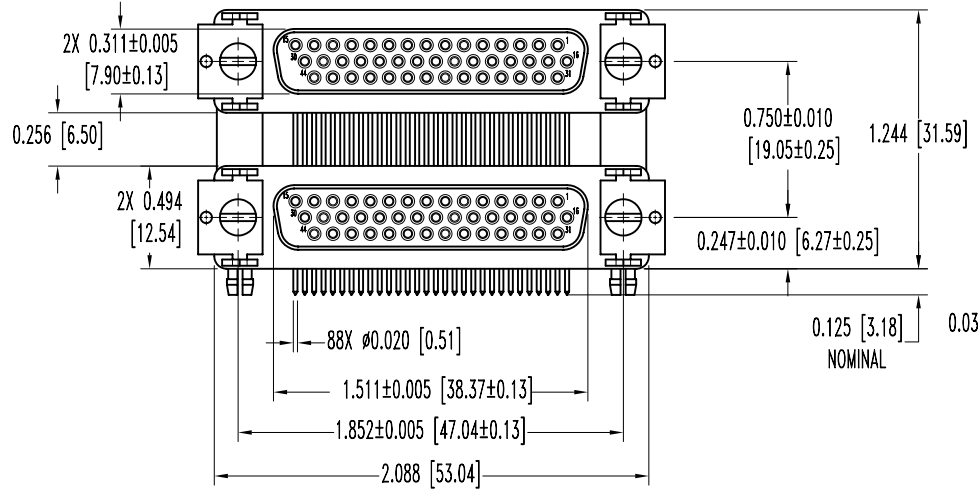

CONTACT HOLE PATTERN

NOTES:

- MATERIALS AND FINISHES:
  - INSULATORS: GLASS FILLED POLYESTER, PER MIL-M-24519, UL 94V-0, BLACK COLOR.
  - CONTACTS: PRECISION MACHINED HIGH TENSILE PHOSPHOR BRONZE, GOLD FLASH OVER NICKEL PLATE.
  - SHELLS: STEEL, ZINC PLATE WITH DICHROMATE SEAL.
  - MOUNTING BRACKETS: BRASS, ZINC PLATE WITH DICHROMATE SEAL.
  - LOCK TABS: STEEL WITH NICKEL PLATE.
  - SCREWS: BRASS, ZINC PLATE WITH DICHROMATE SEAL.
  - ALIGNMENT BAR: NYLON, COLOR BLACK.
  - PUSH-ON FASTENERS: BERYLLIUM COPPER, TIN PLATE.
  - CLINCH NUT: BRASS, ZINC PLATE.
- ELECTRICAL CHARACTERISTICS:
  - CONTACT CURRENT RATING: 3 AMPERES.
  - INITIAL CONTACT RESISTANCE: 0.010 OHMS MAXIMUM.
  - INSULATOR RESISTANCE: 5 G OHMS.
  - WORKING VOLTAGE: 300 V r.m.s.
- TEMPERATURE RANGE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

 <b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com		SCALE		DRAWN BY	
DECIMAL TOL. ± 0.015 [0.38]		DDB SERIES		N.T.S.	
TITLE DDB44FN8V5/44FN8V50		DATE		REV.	
ANGULAR TOL. ± 5°		1-28-05		NC	
DRAWING NUMBER SK5970		APPROVED BY YK		APPROVED BY YK	