

1-877-277-6266

ASSMANN

Electronics, Inc.

www.assmann.us

Product Advantages:

- Feed-Thru Field Installable
- User Friendly & Easy to Assembly
- Waterproof Design (IP 67)
- Competitive Cost to Upgrade Waterproof Function

Product Materials:

Housing:	PPO
Gasket:	Silicone
Nut:	Nylon + GF
Fire Rating:	UL-94V0

Product Specification:

Operating Temperature:	-40°C~+85°C
Waterproof Rating:	IP67
Warranty:	1 year

Accessory:

Fiber Optic Cap




PN: A-FB-CAP-WFBPFLA-1-R

How to use:

Assmann Fiber Optic Connector is innovative and economic way to protect your LC Fiber Optic cable.



Assembly Instruction:

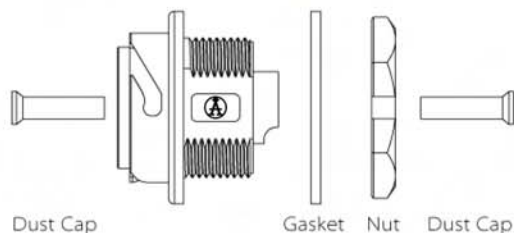

Dust Cap


Gasket

Nut

Dust Cap



PN: A-FB-00RLFJ-LC7-1-R

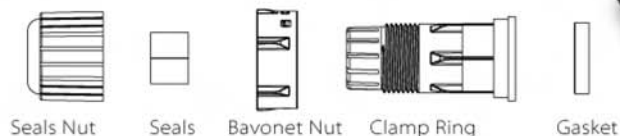

Seals Nut

Seals

Bavonet Nut

Clamp Ring

Gasket



PN: A-FB-00BLMA-LL1-R

ASSMANN

Electronics, Inc.

1840 W. Drake Drive, Suite 101


Tempe, AZ. 85283, U.S.A.

Tel. 480.897.7001

Fax 480.897.7255

Toll Free 877.277.6266


Email: info@usa-assmann.com




Seals Nut



Seals

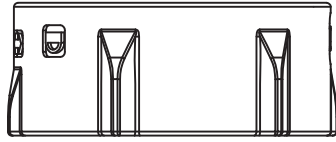



Bayonet Nut

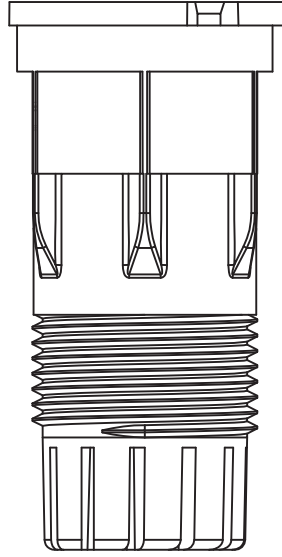

Clamp Ring



Gasket

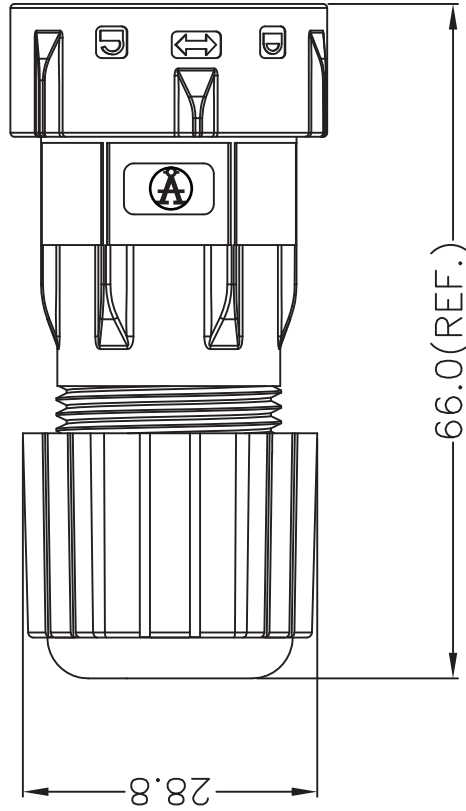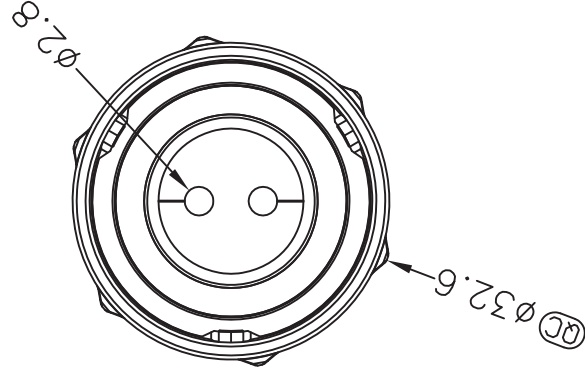

Material:

- Waterproof Rate: IP67
- Cable OD: $\varnothing 2.5 \sim \varnothing 2.8$ MM Max.
- Clamp Ring: PPO, UL94V-0, Black
- Bayonet Nut: PPO, UL94V-0, Black
- Sealing Nut: Nylon+GF, UL94V-0, Black
- Seals: Silicone, UL94V-0, Gray
- Gasket: Silicone, UL94V-0, Gray

Unit: MM \pm 0.25MM

Ⓜ = Assmann logo

RoHS
Compliant

ITEM NO.

A-FB-00BLMA-LL1-R

TITLE

Waterproof Fiber Optical Cable Assembly, $\varnothing 2.8$ MM

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2010 by Assmann Electronic Components
All International Rights Reserved