



SOD-523



Dimensions in inches and (millimeters)

Features

- ✧ High reliability with high surge current handing capability.
- ✧ Small package.
- ✧ High speed.

Applications

- ✧ High speed switching.

Ordering Information

| Type No. | Marking | Package Code |
|----------|---------|--------------|
| 1SS422 | 6 | SOD-523 |

MAXIMUM RATING @ Ta=25°C unless otherwise specified

| Parameter | Symbol | Limits | Unit |
|----------------------------------|------------------|---------|------|
| Peak reverse voltage | V _{RM} | 100 | V |
| RMS Reverse voltage | V _{RMS} | 70 | V |
| DC Reverse voltage | V _R | 85 | V |
| Peak surge forward current @t=1s | I _{FSM} | 500 | mA |
| Total power dissipation | P _{tot} | 150 | mW |
| Junction temperature | T _j | 125 | °C |
| Storage temperature | T _{stg} | -55-125 | °C |

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|-----------------------|-----------------|------|------|------|------|--|
| Forward voltage | V _F | | | 1.2 | V | I _F =150mA |
| Reverse current | I _R | | | 0.1 | µA | V _R =85V |
| Diode capacitance | C _d | | | 3.0 | pF | V _R =0.5V,f=1MHz |
| Reverse recovery time | t _{rr} | | | 4 | ns | V _R =6V,I _F =10mA,R _L =100Ω |

TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

FIG. 1 - SURGE CURRENT CHARACTERISTICS

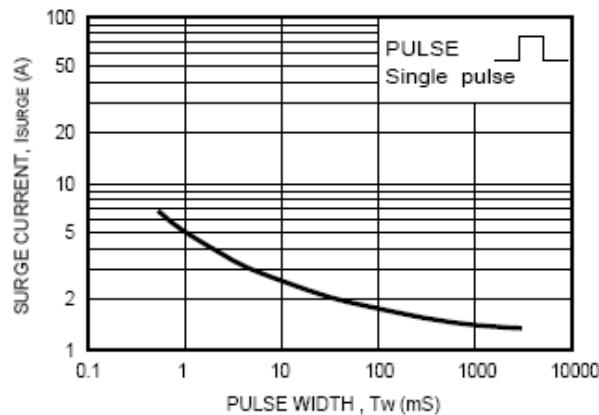


FIG. 2 - FORWARD CHARACTERISTICS

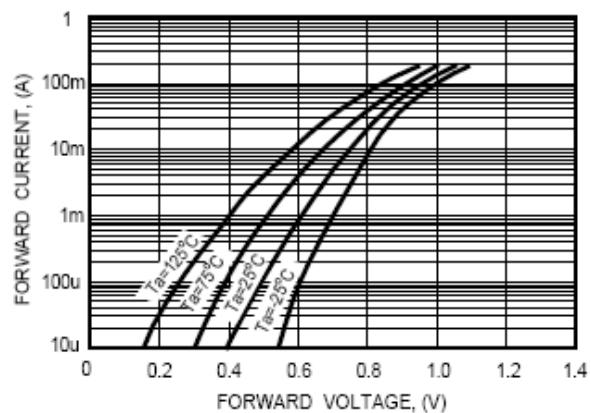


FIG. 3 - TYPICAL JUNCTION CAPACITANCE

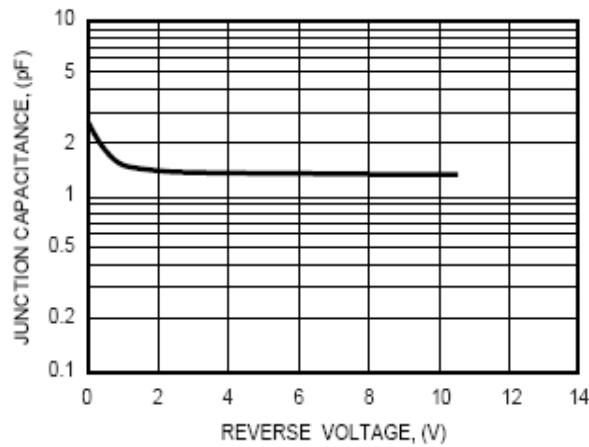


FIG. 4 - REVERSE CHARACTERISTICS

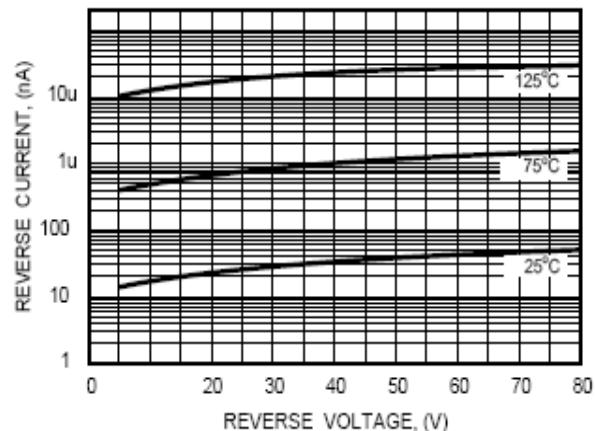


FIG. 5 - REVERSE RECOVERY TIME

