



Triacs sensitive gate


BT134-600

GENERAL DESCRIPTION

Glass passivated triacs in a plastic envelope, intended for use in applications requiring high bidirectional transient and blocking voltage capability and high thermal cycling performance. Typical applications include motor control, industrial and domestic lighting,

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

Parameter	Symbol	Typ	Unit
Repetitive peak off-state voltages	V_{DRM} V_{RRM}	600	V
RMS on-state current	$I_{T(RMS)}$	4.0	A
Non-repetitive peak on-state current	I_{TSM}	25	A
Max. Operating Junction Temperature	T_j	110	°C
Storage Temperature	T_{stg}	-45~150	°C

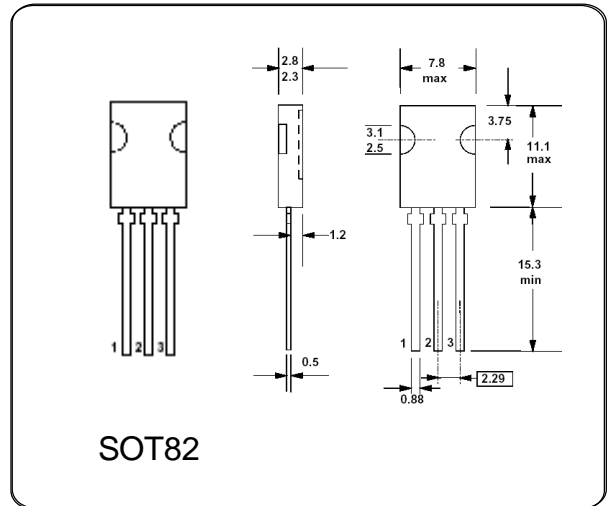

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

Parameter		Symbol	Test Conditions	Min	Typ	Max	Unit
Repetitive peak off-state voltages		V_{DRM} V_{RRM}		—	600	—	V
RMS on-state current		$I_{T(RMS)}$	full sine wave; $T_{mb} \leq 107^\circ\text{C}$	—	4	—	A
On-state voltage		V_T	$I_T = 5\text{A}$	—	1.4	1.7	V
Holding current		I_H	$V_D = 12\text{V}; I_{GT} = 0.1\text{A}$	—	1.2	10	mA
Gate trigger current	T2+G+	I_{GT}	$V_D = 12\text{V}; I_T = 0.1\text{A}$	—	2.0	5.0	mA
	T2+G-			—	2.5	5.0	
	T2-G-			—	2.5	5.0	
	T2-G+			—	5.0	10	
Latching current	T2+G+	I_L	$V_D = 12\text{V}; I_{GT} = 0.1\text{A}$	—	1.6	10	mA
	T2+G-			—	4.5	15	
	T2-G-			—	1.2	10	
	T2-G+			—	2.2	15	
Gate trigger voltage		V_{GT}	$V_D = 12\text{V}; I_T = 0.1\text{A}$	—	0.7	1.5	V