

## Axial lead diode

Schottky barrier rectifiers  
diodes

**SB 820 ... SB 845**

**Forward Current: 8 A**

**Reverse Voltage: 20 to 45 V**

## Features

- Max. solder temperature: 260°C
- Plastic material has UL classification 94V-0

## Mechanical Data

- Plastic case: 5,4 x 7,5 [mm]
- Weight approx.: 1,4 g
- Terminals: plated terminals solderable per MIL-STD-750
- Mounting position: any
- Standard packaging: 1250 pieces per ammo or per reel

1) Valid, if leads are kept at  $T_A$  at a distance of 10 mm from case

2)  $I_F = 5 \text{ A}$ ,  $T_j = 25^\circ\text{C}$

3)  $T_A = 25^\circ\text{C}$


4) Thermal resistance from junction to lead/terminal at a distance 0 mm from case

5) Max. junction temperature  $T_j \leq 175^\circ\text{C}$  in reverse mode  $V_R = 50\% V_{RRM}$ ;  $T_j \leq 200^\circ\text{C}$  in bypass mode

Type	Repetitive peak reverse voltage $V_{RRM}$ V	Surge peak reverse voltage $V_{RSM}$ V	Max. reverse recovery time $I_F = -A$ $I_R = -A$ $I_{RR} = -A$ $t_{rr}$ ns	Max. forward voltage $V_F^2)$
SB 820	20	20	-	0,49
SB 830	30	30	-	0,49
SB 840	40	40	-	0,49
SB 845	45	45	-	0,49

Absolute Maximum Ratings		$T_A = 25^\circ\text{C}$ , unless otherwise specified	
Symbol	Conditions	Values	Units
$I_{FAV}$	Max. averaged fwd. current, R-load, $T_A = 50^\circ\text{C}$ <sup>1)</sup>	8	A
$I_{FRM}$	Repetitive peak forward current $f > 15 \text{ Hz}$ <sup>1)</sup>	30	A
$I_{FSM}$	Peak forward surge current 50 Hz half sinus-wave <sup>3)</sup>	200	A
$i^2t$	Rating for fusing, $t < 10 \text{ ms}$ <sup>3)</sup>	200	A <sup>2</sup> s
$R_{thA}$	Max. thermal resistance junction to ambient <sup>1)</sup>		K/W
$R_{thL}$	Max. thermal resistance junction to terminals <sup>4)</sup>	5	K/W
$T_j$	Operating junction temperature	- 50 ... + 150 ( $T_j \leq 200^\circ\text{C}$ 5))	°C
$T_s$	Storage temperature	- 50 ... + 175	°C

Characteristics		$T_A = 25^\circ\text{C}$ , unless otherwise specified	
Symbol	Conditions	Values	Units
$I_R$	Maximum leakage current, $T_j = 25^\circ\text{C}$ ; $V_R = V_{RRM}$	<400	µA
	$T_j = 100^\circ\text{C}$ ; $V_R = V_{RRM}$	<18	mA
$C_J$	Typical junction capacitance (at MHz and applied reverse voltage of V)	-	pF
$Q_{rr}$	Reverse recovery charge ( $U_R = V$ ; $I_F = A$ ; $dI_F/dt = A/\text{ms}$ )	-	µC
$E_{RSM}$	Non repetitive peak reverse avalanche energy ( $I_R = \text{mA}$ ; $T_j = {}^\circ\text{C}$ ; inductive load switched off)	-	mJ

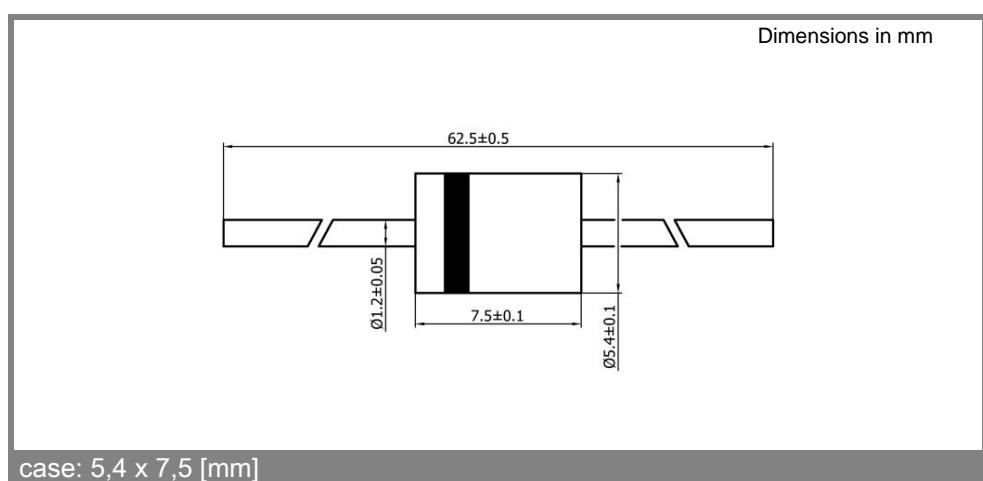

# SB820 ... SB845

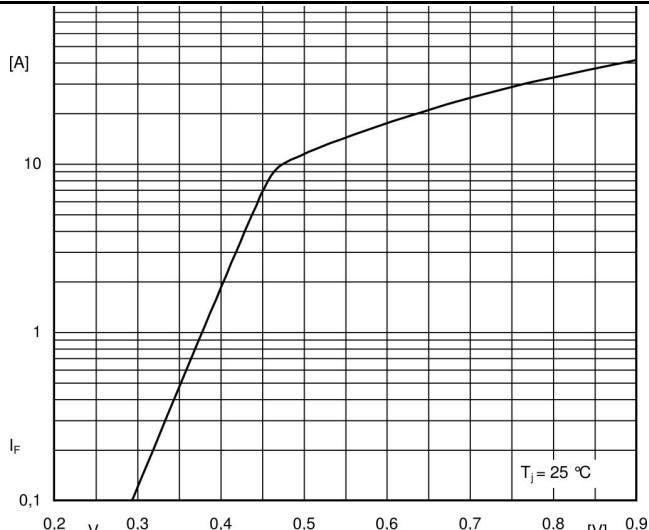


Fig. 1 Forward characteristics (typical values)

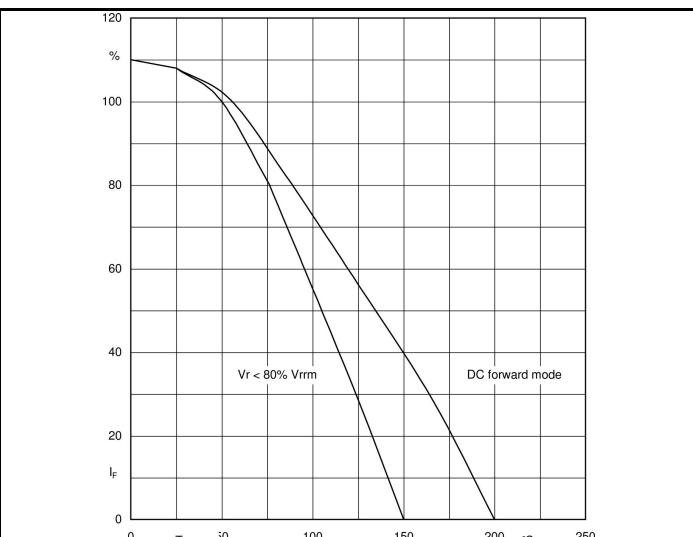


Fig. 2 Rated forward current vs. ambient temperature <sup>1)</sup>

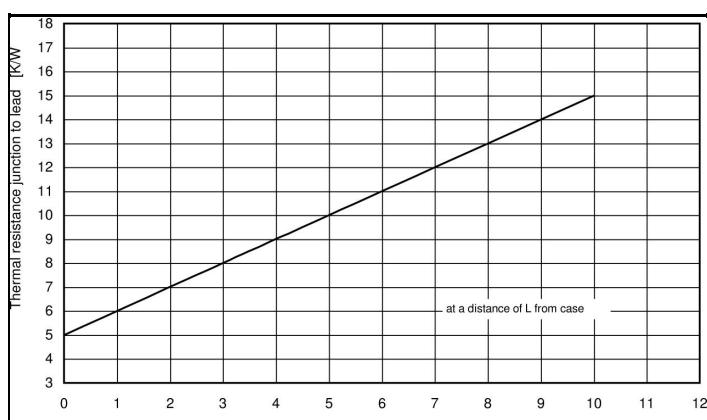


Fig. 3 Thermal resistance versus distance from case