

# FREQUENCY SYNTHESIZER

**Model 453014**

**500 - 600 MHz**

## Features

- Low Phase Noise
- Low Spurious Outputs
- High Reliability
- Internal Reference Model

## Specifications

CHARACTERISTIC	TYPICAL Ta = +25 °C	MIN/MAX Ta = -10°C to +60 °C
Frequency (MHz)	500 - 600	500 - 600
Output Power (dBm)	+13	0 / +17.0
Step Size (MHz)	1	—
Stability (ppm)	±10	—
Harmonics (dBc)	-20	-15 Max.
Spurious (dBc)	-80	-80 Max.
Phase Noise (500 MHz)	-61 dBc/Hz @ 10 Hz -77 dBc/Hz @100 Hz -80 dBc/Hz @ 1 kHz -81 dBc/Hz @ 10 kHz -138 dBc/Hz @ 100 kHz -148 dBc/Hz @ 1 MHz	—
<b>Power</b>	<b>Vdc</b> <b>mA</b>	<b>+15</b> <b>70</b>
		<b>+15</b> <b>90 Max.</b>

NOTE: Care should always be taken to effectively ground the case of each unit.



## Absolute Maximum Ratings

Ambient Operating Temperature ..... -55°C to +100 °C  
 Storage Temperature ..... -62°C to +125 °C  
 Case Temperature ..... +125 °C  
 DC Voltage ..... +24 Volts  
 Maximum DC Tuning Voltage ..... +20 Volts  
 Minimum DC Tuning Voltage ..... 0 Volts

**Spectrum Microwave** can design a synthesizer to meet your requirements, from low-cost surface mount commercial units to complex multiple conversion designs for military and space applications.

We have delivered units with step sizes from 0.002 Hz to 200 MHz, 5-microsecond switching speeds, automatically switched back-up references, direct digital synthesis, and many other special features.

## Typical Performance Data

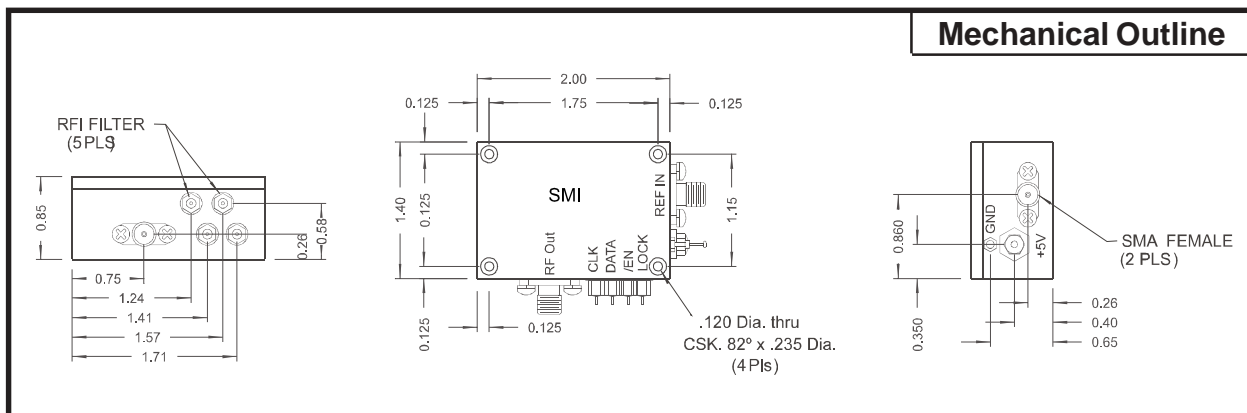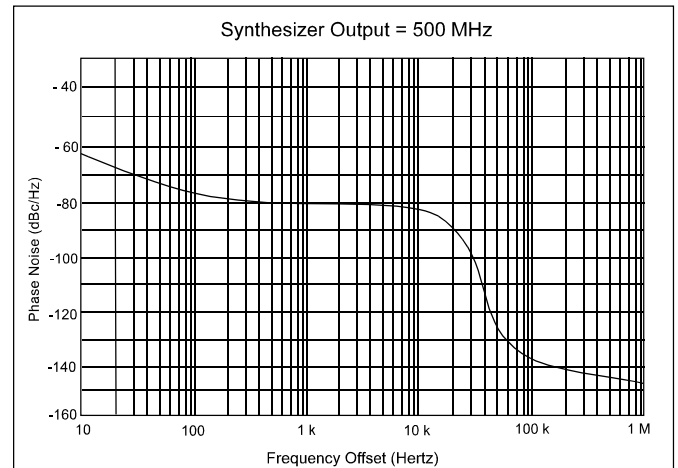

Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532

Rev. 11/7/08

www.SpectrumMicrowave.com · Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001