

LOW COLLECTOR SATURATION VOLTAGE  
LARGE CURRENT



### FEATURES

- High Power Dissipation :  $P_C=1.3W(T_a=25^\circ C)$
- Complementary to KTC5103D/L

### MAXIMUM RATING ( $T_a=25^\circ C$ )

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		$V_{CBO}$	-60	V
Collector-Emitter Voltage		$V_{CEO}$	-60	V
Emitter-Base Voltage		$V_{EBO}$	-7	V
Collector Current	DC	$I_C$	-5	A
	Pulse *	$I_{CP}$	-8	
Base Current		$I_B$	-1	A
Collector Power Dissipation	$T_a=25^\circ C$	$P_C$	1.3	W
	$T_c=25^\circ C$		15	
Junction Temperature		$T_j$	150	$^\circ C$
Storage Temperature Range		$T_{stg}$	-55 ~ 150	$^\circ C$

\*  $PW \leq 10ms$ , Duty Cycle  $\leq 50\%$

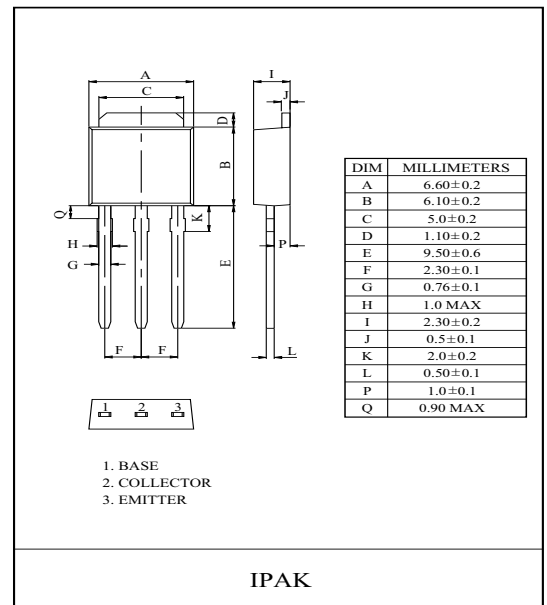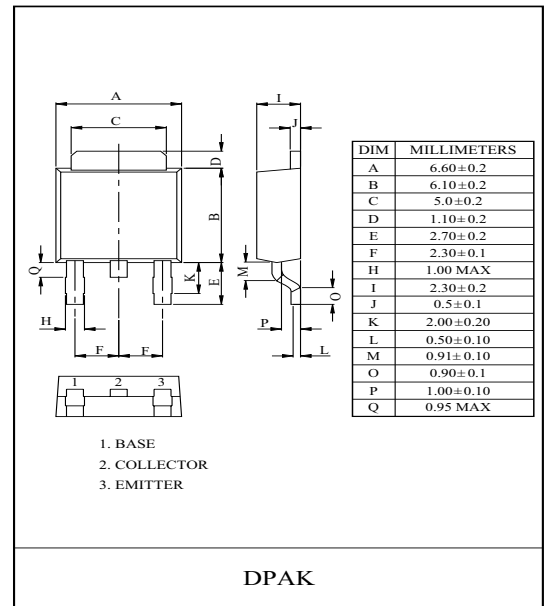

### ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ C$ )


CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		$I_{CBO}$	$V_{CB}=-50V, I_E=0$	-	-	-10	$\mu A$
Emitter Cut-off Current		$I_{EBO}$	$V_{EB}=-7V, I_C=0$	-	-	-10	$\mu A$
DC Current Gain	$h_{FE1}$	*	$V_{CE}=-1V, I_C=-0.1A$	60	-	-	
	$h_{FE2}$ (Note)		$V_{CE}=-1V, I_C=-2A$	160	-	400	
	$h_{FE3}$		$V_{CE}=-2V, I_C=-5A$	50	-	-	
Collector-Emitter Saturation Voltage *		$V_{CE(sat)}$	$I_C=-2A, I_B=-0.2A$	-	-0.14	-0.3	V
Base-Emitter Saturation Voltage *		$V_{BE(sat)}$	$I_C=-2A, I_B=-0.2A$	-	-0.9	-1.2	V
Switching Time	Turn On Time	$t_{on}$	<p><math>I_{B1}=I_{B2}=0.2A</math> DUTY CYCLE <math>\leq 1\%</math></p>	-	0.15	1	$\mu S$
	Storage Time	$t_{stg}$		-	0.78	2.5	
	Fall Time	$t_f$		-	0.18	1	

\* Pulse test :  $PW \leq 350\mu S$ , Duty Cycle  $\leq 2\%$  Pulse


Note)  $h_{FE(2)}$  Classification : O:160 ~ 320, Y:200 ~ 400.

# KTA1385D/L


Pc - Ta

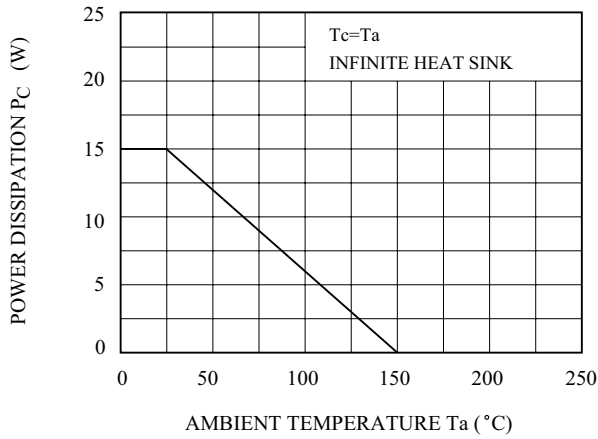


$d_T - T_C$

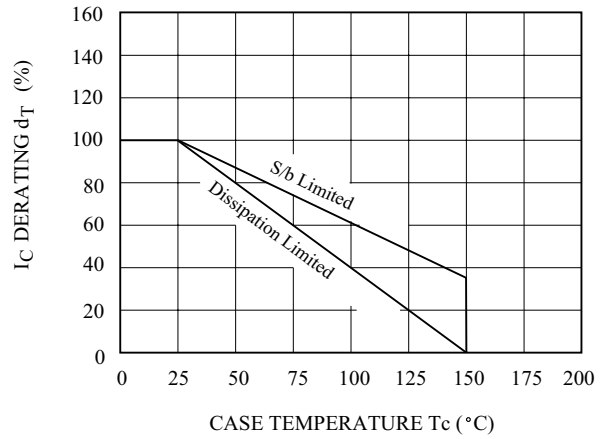


SAFE OPERATING AREA

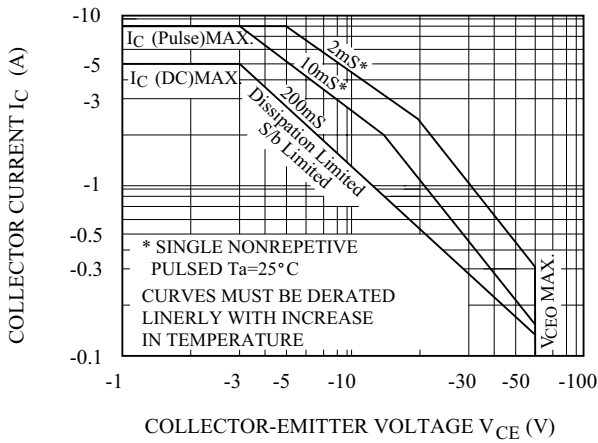


REVERSE BIAS SAFE OPERATING AREA

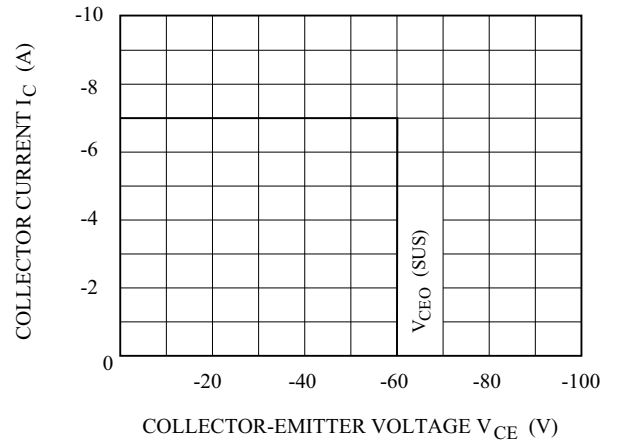

$I_C - V_{CE}$

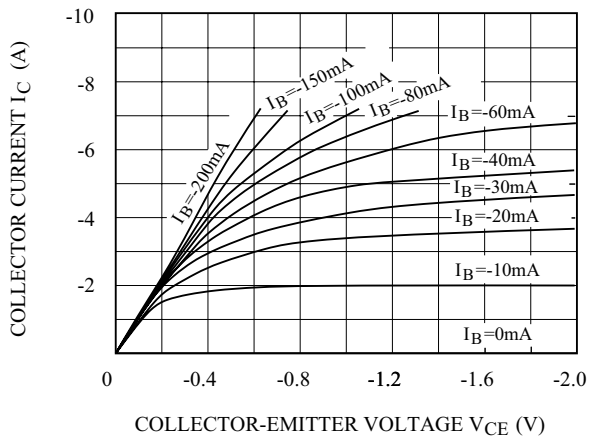

$h_{FE} - I_C$

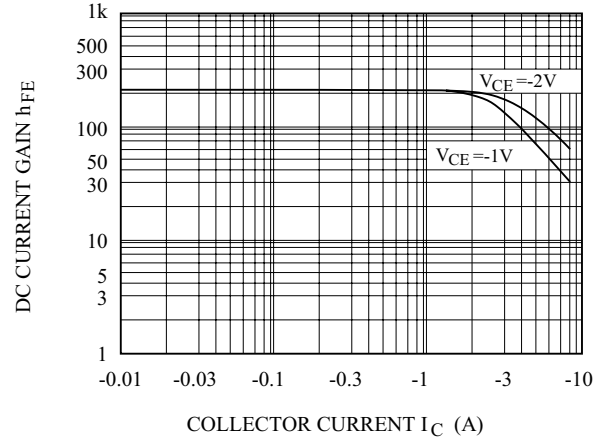

# KTA1385D/L

