


SSL-LX88123XX SERIES JUMBO LED 8x8 SQUARE LENS

FEATURES		APPLICATIONS		OPTIONS AVAILABLE				
<ul style="list-style-type: none"> • Four Color Options • Bi-Color Options • Long Life/Low Power 		<ul style="list-style-type: none"> • Panel Indicators • Status Illumination • Information Displays 		<ul style="list-style-type: none"> • Add-on Spacers • Add-on Leads 				
LUMEX PART NBR	EMITTED COLOR		EPOXY LENS COLOR	BRIGHTNESS		VIEW ANGLE	VI@20mA	
	PEAK(nm)	TYP.(mcd.)		I(f(mA)	TYP.		MAX	
SSL-LX88123ID	RED	635	RED DIFF.	15	20	8	2.0	2.8
SSL-LX88123SRD	RED	660	RED DIFF.	40	20	80	1.7	2.2
SSL-LX88123GD	GREEN	565	GREEN DIFF.	15	20	80	2.1	2.8
SSL-LX88123YD	YELLOW	585	YELLOW DIFF.	15	20	80	2.1	2.8
BI-COLOR OPTIONS								
SSL-LX88123HGW	RED/GREEN	695/565	WHITE DIFF.	8/8	20/20	80	2.0	2.8

See pages 8 -14 for Max. operating limits and operational curves

DIMENSIONS (mm/inch) ±.2mm

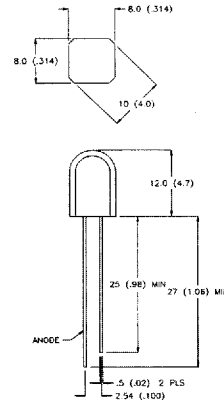


SSI-LXH808X SERIES JUMBO 8x8mm P.C. INDICATOR

FEATURES		APPLICATIONS		MATERIAL SPECIFICATIONS			
<ul style="list-style-type: none"> • Easy Installation • High Contrast Holder • Four Color Options • Bi-Color Blinking Version 		<ul style="list-style-type: none"> • Front Panel Indicators • Status Annunciators • Go-No Go Condition Indicators • Dot Matrix Displays 		<ul style="list-style-type: none"> • Holder: White Polycarbonate • Termination: 0.5mm □ Leads • Insulated Leads Available • Installation: T.P.C. Mount 			
LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED
	PEAK(nm)	TYP (mcd.)			TYP (mcd.)	mA	
SSI-LXH808ID	RED	635	10-25	2.1	15	20	SSL-LX88123XX
SSI-LXH808SRD	RED	660	10-25	1.7	40	20	SSL-LX88123XX
SSI-LXH808GD	GREEN	565	10-25	2.1	15	20	SSL-LX88123XX
SSI-LXH808YD	YELLOW	585	10-25	2.1	15	20	SSL-LX88123XX
BI-COLOR OPTION							
SSI-LXH808HGW	RED/GREEN	695/565	10-25	2.1	8/12	20	SSL-LX88123HGW

INSULATED LEAD OPTIONS ADD -150 TO PART NBR. (6" LENGTH)

See pages 8 -14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

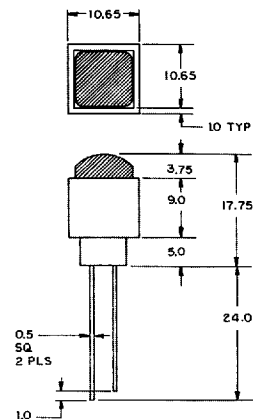


SSL-LX80113XX SERIES JUMBO 8mm ROUND LEDS

FEATURES		APPLICATIONS		OPTIONS AVAILABLE				
<ul style="list-style-type: none"> • Four Color Options • Bi-Color Version • Long Life/Low Power • Blinking Version 		<ul style="list-style-type: none"> • Panel Indicators • Status Illumination • Switches/Keyboards • Information Displays 		<ul style="list-style-type: none"> • Add-on Spacers • Add-on Leads • Panel Mounting Hardware 				
LUMEX PART NBR	EMITTED COLOR		EPOXY LENS COLOR	BRIGHTNESS		VIEW ANGLE	VI@20mA	
	PEAK(nm)	TYP.(mcd.)		I(f(mA)	TYP.		MAX	
SSL-LX80113ID	RED	635	RED DIFF.	15	20	80	2.0	2.8
SSL-LX80113SRD	RED	660	RED DIFF.	40	20	80	1.7	2.2
SSL-LX80113GD	GREEN	565	GREEN DIFF.	15	20	80	2.1	2.8
SSL-LX80113YD	YELLOW	585	YELLOW DIFF.	15	20	80	2.1	2.8
BI-COLOR OPTIONS								
SSL-LX80113HGW	RED/GREEN	695/565	WHITE DIFF.	8/8	20/20	80	2.0	2.8
BLINKING OPTIONS								
SSL-LX80113BID	RED	635	RED DIFF.	12	9V	80	3-15V	

See pages 8 -14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

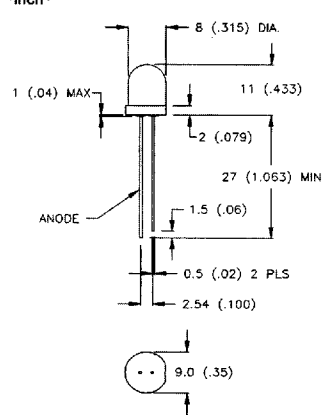

5616113 0001020 796