


650101FA Series

Specifications:

- **Insulator material** : Warm Gray High Temp. Plastic
- **Operating Type Range** : -40°C TO +105°C
- **Terminal Material** : Phos. Bronze
- **Platings** : Contact-Selective Gold
Plated or Full Gold Plated
- **Max. Current Rating** : 0.5A
- **Max. Voltage Rating** : 60V AC
- **Dielectric Strength** : 500V AC For 60 Seconds

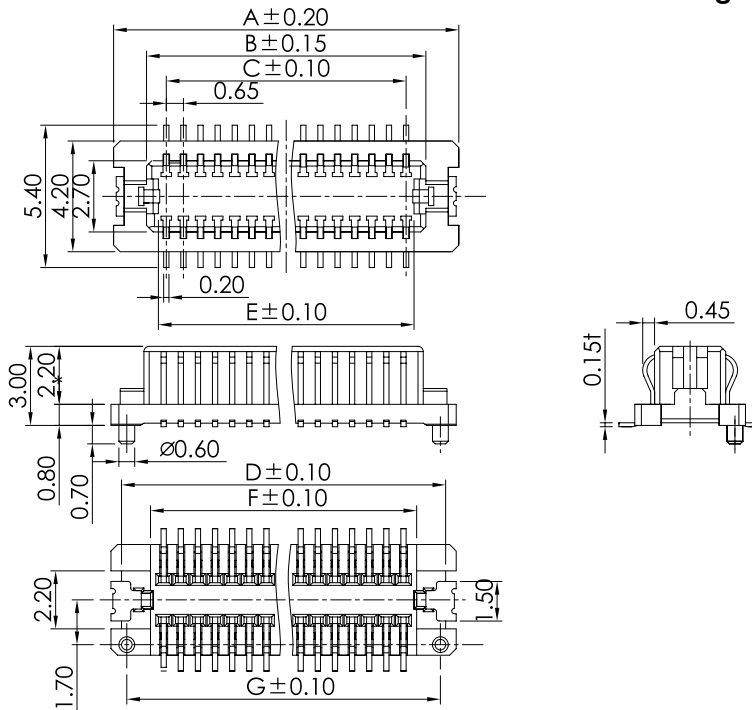


Order Information

650101FA□□□□01PU
 1 2 3 4 5

1. 'A' : Straight SMT Type
 2. No. of pins.
 3. Plating
 4. Color 'P' : Warm Gray
 5. Package
 'U' : Tube Package Without Cap
- Reference Page 11

Recommended P.C.B Layout

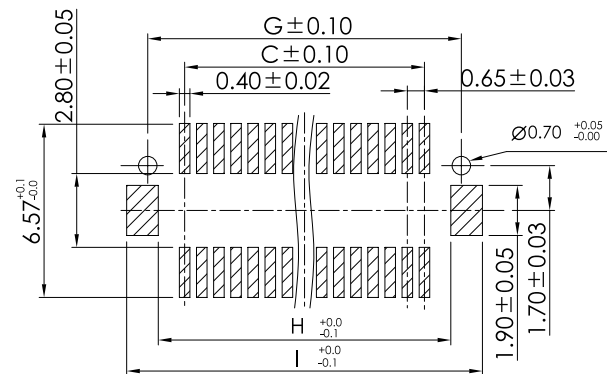

Dimension Information

SUYIN P/NO.	A	B	C	D	E	F	G	H	I
650101FA010□□□01PU	6.60	4.10	2.60	5.80	3.20	3.60	5.40	4.50	7.00
650101FA020□□□01PU	9.85	7.35	5.85	9.05	6.45	6.85	8.65	7.75	10.25
650101FA030□□□01PU	13.10	10.60	9.10	12.30	9.70	10.10	10.90	11.00	13.50
650101FA060□□□01PU	22.85	20.35	18.85	22.05	19.45	19.85	21.65	20.75	23.25