


# SAW Bandpass Filter F4912



## Features

- RF bandpass filter for CDMA450 F-band Rx. Part
- Usable bandwidth 5MHz (489.0 MHz ~ 494.0 MHz)
- High attenuation
- No matching 50Ω single-ended operation
- Ceramic Surface Mounted Device Package ( 3.8 mm × 3.8 mm )
- RoHS compliant

## Package Dimensions

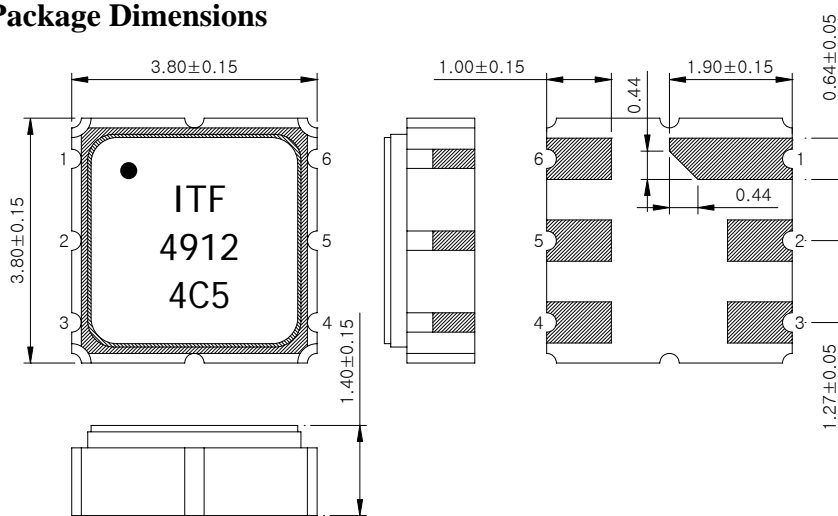

Dimensions shown are nominal in millimeters

Body : Al<sub>2</sub>O<sub>3</sub> Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um  
Ni Plating

### Pin Configurations

2	Input
5	Output
1, 3, 4, 6	Case ground

## Maximum Ratings

Parameters	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	25	85
Storage Temperature Range	°C	-40	-	85
Power Handling Capability	dBm	-	-	

Electrostatics Sensitive Device (ESD)

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4912	
		Rev. Date	2006-06-08	
		Rev.	NR4014-AS02	1/7

# SAW Bandpass Filter F4912



## Specifications

	Minimum	Typical	Maximum	Unit
Center Frequency ( Fc )	-	491.5	-	MHz
Insertion Loss (In Fc +/- 2.5 MHz)	-	2.6	3.5	dB
Amplitude Ripple (In Fc +/- 2.5 MHz)	-	0.8	1.5	dB
VSWR (In Fc +/- 2.5 MHz)	-	1.5	2.0	
Relative Attenuation				
0.3 MHz ~ 450.0 MHz	45	50	-	dB
479.0 MHz ~ 484.0 MHz	45	52	-	
507.5 MHz ~ 520.0 MHz	25	30	-	
520.0 MHz ~ 1600 MHz	45	50	-	
1600 MHz ~ 2000 MHz	40	35	-	
Temperature Range (Operational)	-30	25	85	°C
Input RF Power (In Fc +/- 2.5 MHz)				dBm
Input/Output Impedance		50		Ohms

### Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4912	
		Rev. Date	2006-06-08	
		Rev.	NR4014-AS02	2/7

# SAW Bandpass Filter F4912



## Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )



## Marking Configuration

- 1)  
●
- ITF<sup>2)</sup>
- 4912<sup>3)</sup>
- 4C5<sup>4)</sup>

- 1) Pad Number 1 Index
- 2) Manufacturer name
- 3) Marking Number
- 4) Lot Number



**\* Ink or Laser Marking available**

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4912	
		Rev. Date	2006-06-08	
		Rev.	NR4014-AS02	3/7

# SAW Bandpass Filter F4912



## Typical Performance ( at 25°C )

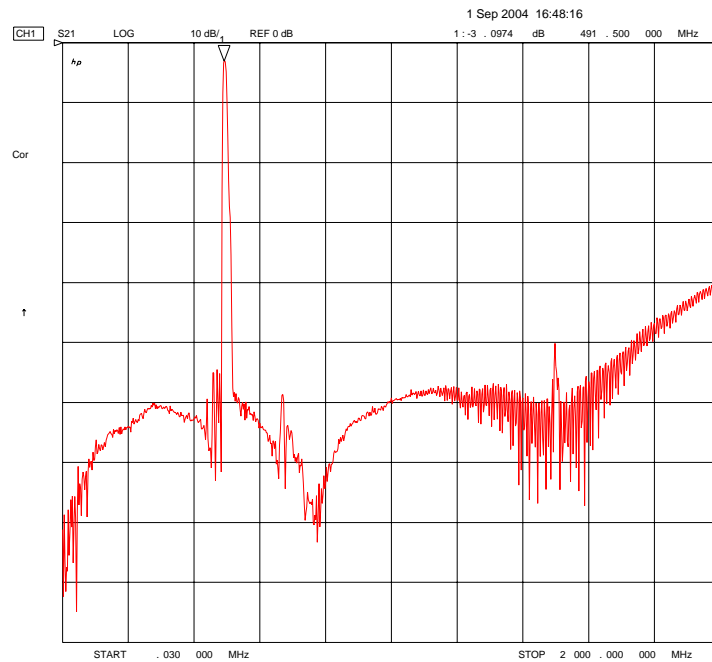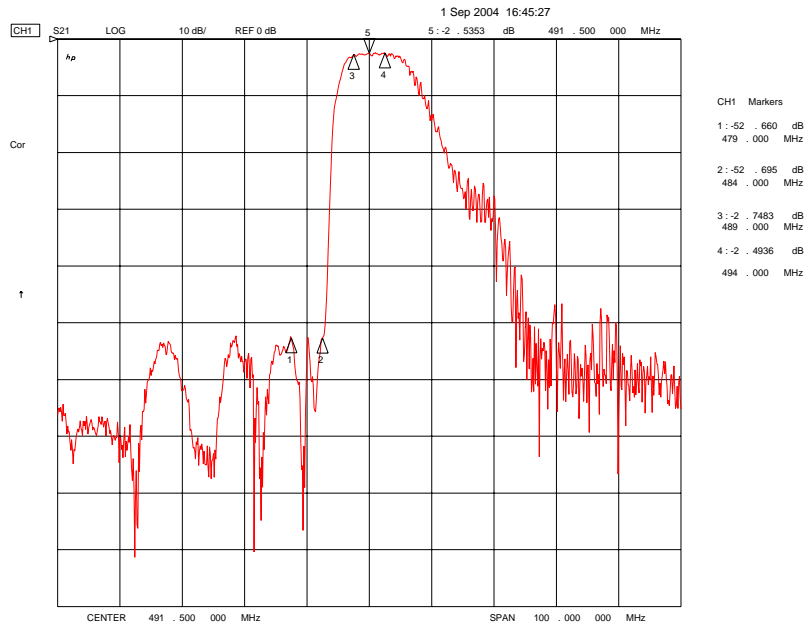



**ITF Co., Ltd.**  
 102-901, Bucheon Technopark 364,  
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,  
 Gyeonggi-Do, Korea 421-809

Part No.	F4912	
Rev. Date	2006-06-08	
Rev.	NR4014-AS02	4/7



# SAW Bandpass Filter F4912



## Input / Output VSWR Charts

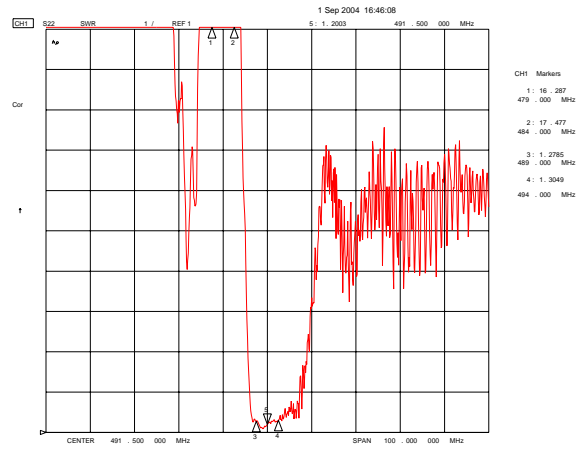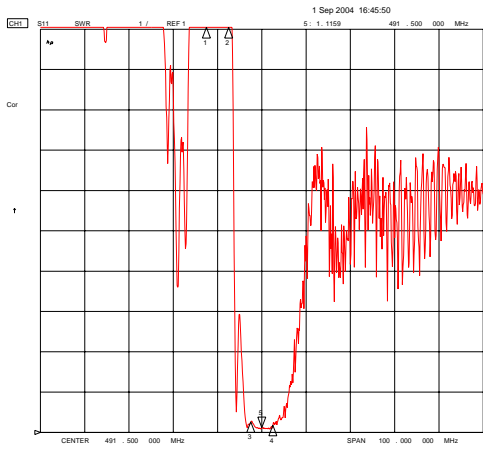

## Input / Output Smith Charts

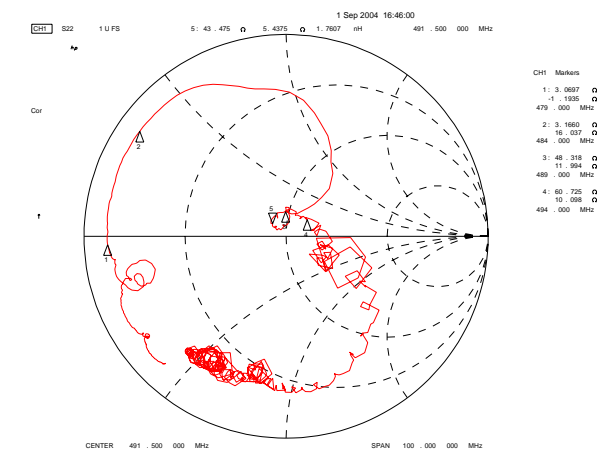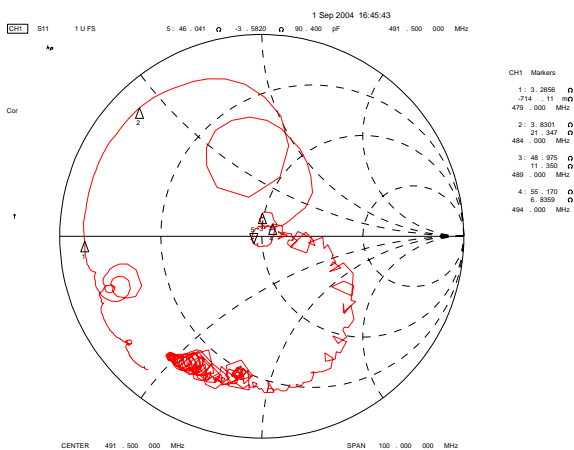

**ITF Co., Ltd.**  
 102-901, Bucheon Technopark 364,  
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,  
 Gyeonggi-Do, Korea 421-809


Part No.	F4912	
Rev. Date	2006-06-08	
Rev.	NR4014-AS02	5/7

# SAW Bandpass Filter F4912




## Packing Specification

1. Reeling Quantity : 3000 pcs / 13" reel ( or 1000 pcs / 7" reel )
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

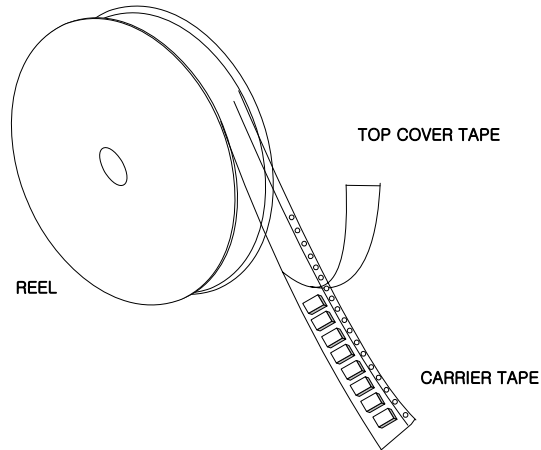

## Tape Specification

1. Leader part and vacant position specification

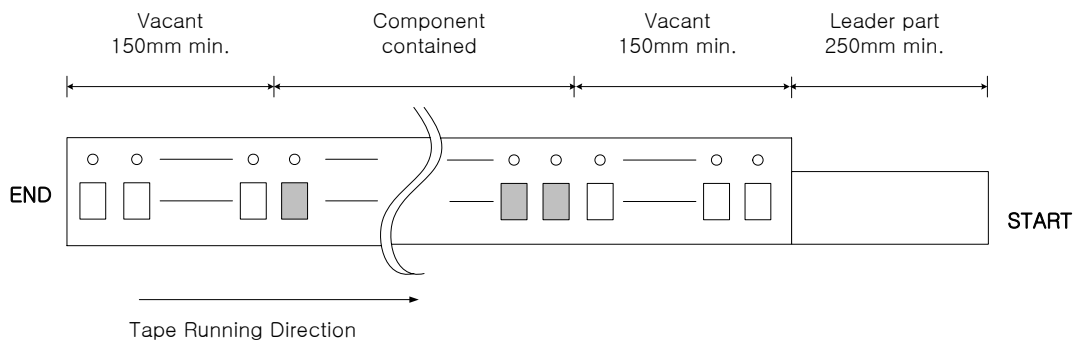


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

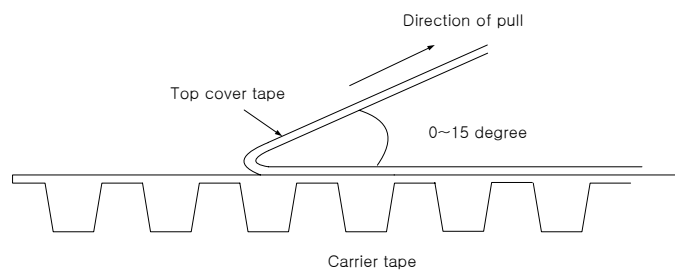


	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4912	
		Rev. Date	2006-06-08	
		Rev.	NR4014-AS02	6/7

# SAW Bandpass Filter F4912




## Carrier Tape Dimensions [unit : mm]

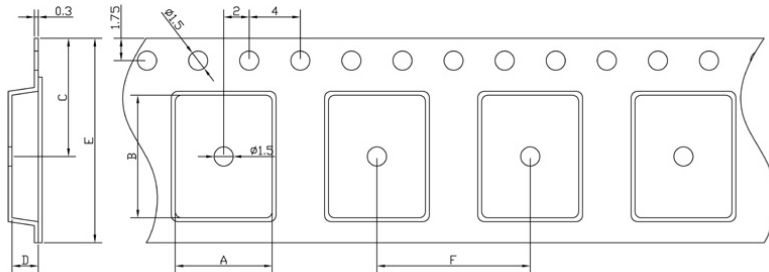


A	4.30 ± 0.1
B	4.30 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1


## Part Direction

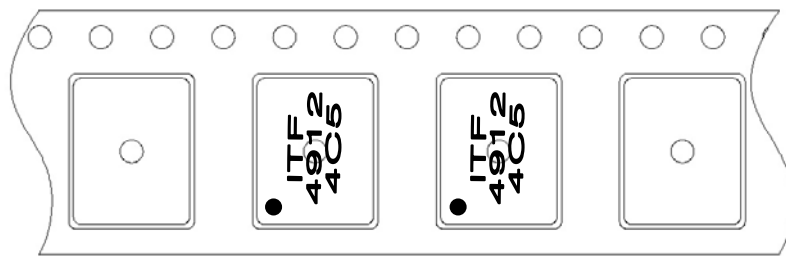

→  
Tape Running Direction

## Reel Dimensions [unit : mm]

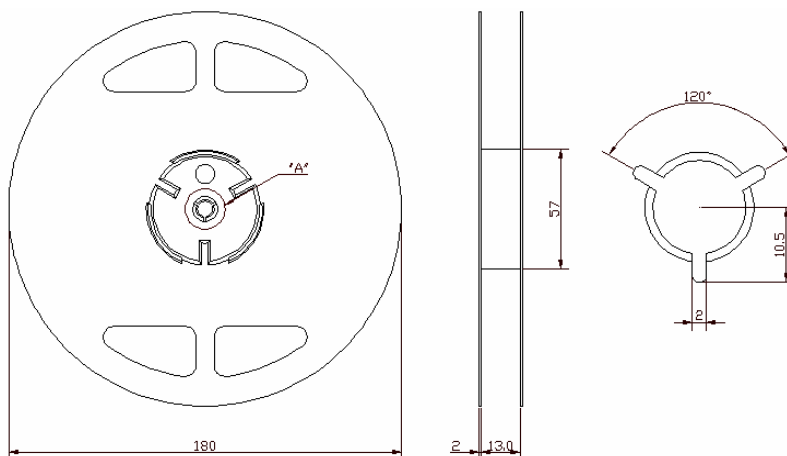

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4912	
		Rev. Date	2006-06-08	
		Rev.	NR4014-AS02	7/7