

**P/N: VD-7015K DATA SHEET****Feature**


- Design to meet ,UL94v-0.
- Operating temperature range: -10°C to +60°C.
- Storage temperature range: -25°C to +75°C.

Electrical Specifications @ 25°C

Description	LPF
Application	SH/LH
Passband Frequency	DC to 630KHz
Insertion Loss	-1.5dB Max. @20KHz~630KHz
Return Loss	-12dB Min. @20KHz~630KHz
Stopband Frequency	900KHz~7.9MHz
Attenuation	-30dB MIN
Impedance	150Ω

Mechanical

PIN	ALOCALTION
1	LINE+
2	LINE-
9	TEL+
10	TEL-
3,4,5,6,7,8,	NC
11,12,13,14,15,16	NC

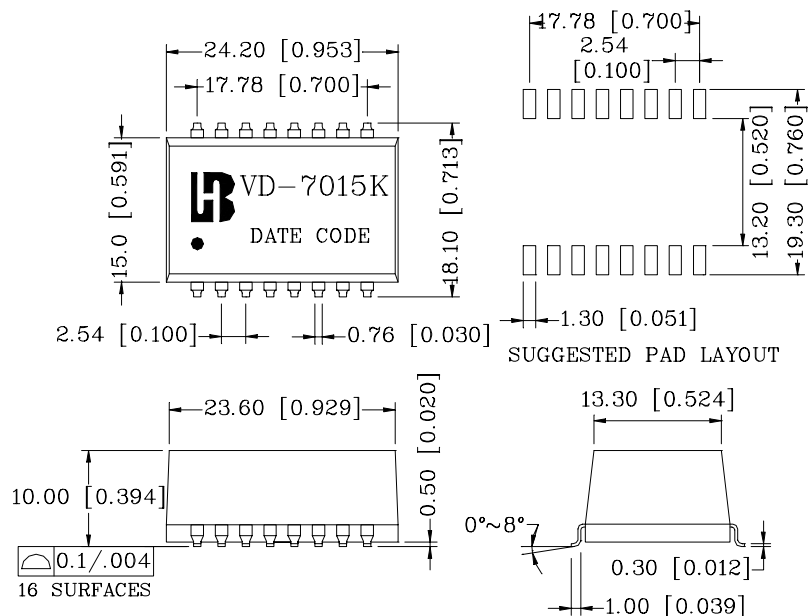

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]