



TAYCHIPST

GLASS PASSIVATED FAST RECOVERY RECTIFIERS

BY296G-BY299G

100V-800V


2.0A

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Fast switching for high efficiency
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
- ◆ 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC DO-15 molded plastic body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.014 ounce, 0.40 grams

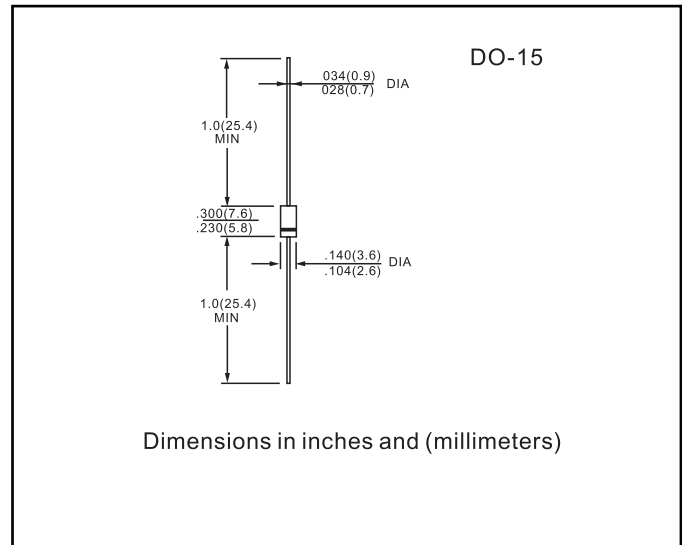

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	BY296G	BY297G	BY298G	BY299G	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	100	200	400	800	VOLTS
Maximum RMS voltage	V _{RMS}	70	140	280	560	VOLTS
Maximum DC blocking voltage	V _{DC}	100	200	400	800	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length at T _A =75°C	I _(AV)	2.0				Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	70.0				Amps
Maximum instantaneous forward voltage at 2.0A	V _F	1.3				Volts
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	5.0 100.0				μA
Maximum reverse recovery time (NOTE 1)	t _{rr}	500				ns
Typical junction capacitance (NOTE 2)	C _J	40.0				pF
Typical thermal resistance (NOTE 3)	R _{θJA}	40.0				°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-65 to +150				°C

Note: 1.Reverse recovery condition I_F=0.5A, I_R=1.0A, I_{rr}=0.25A
 2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.
 3.Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

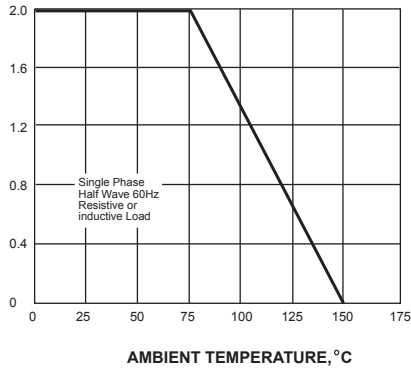

PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


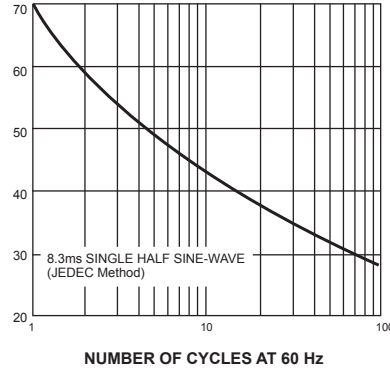


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

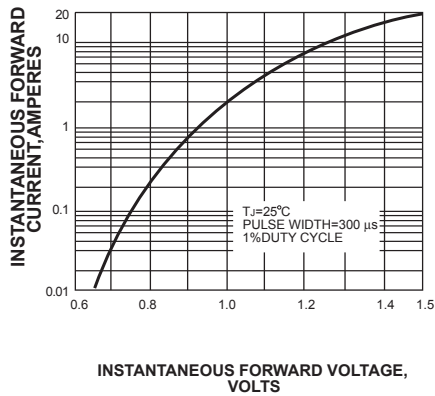

INSTANTANEOUS REVERSE CURRENT,
MICROAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS


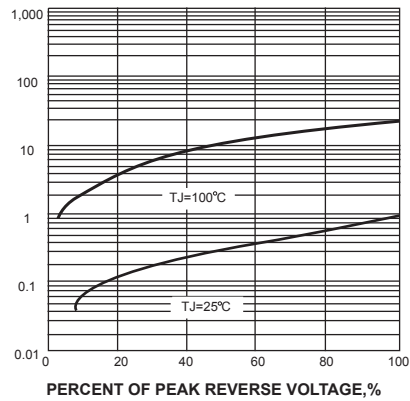


FIG. 5-TYPICAL JUNCTION CAPACITANCE



TRANSIENT THERMAL IMPEDANCE,
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

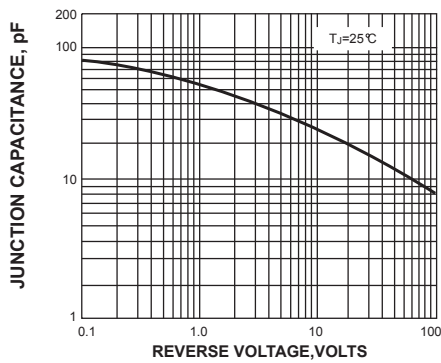