



1. Dimensions:

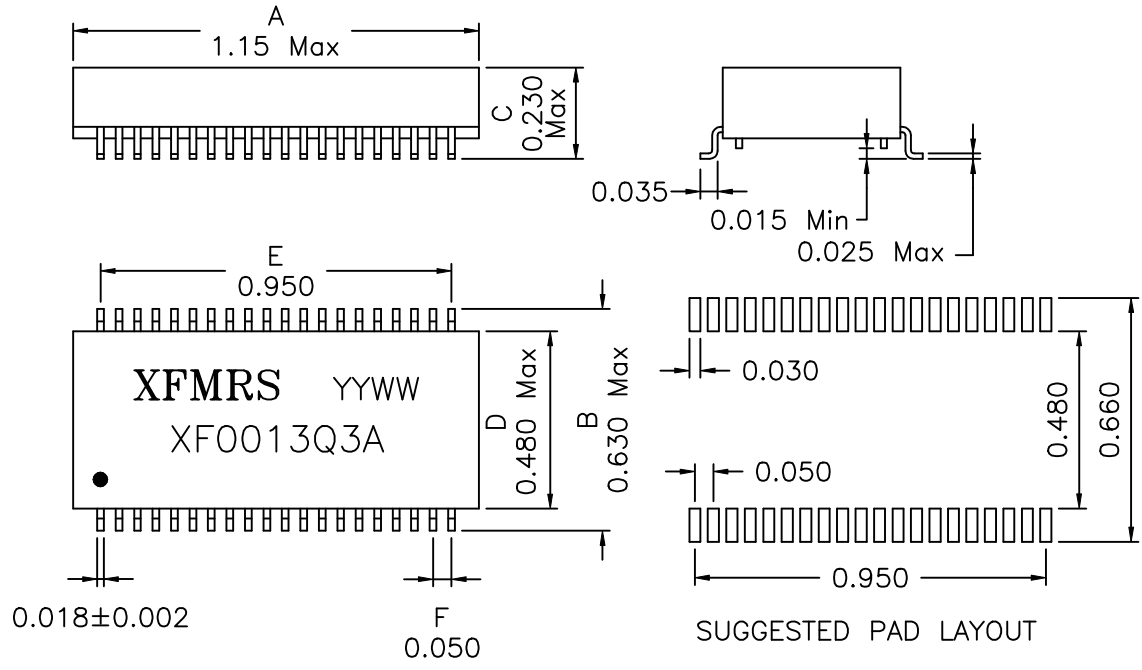

2. Schematic:

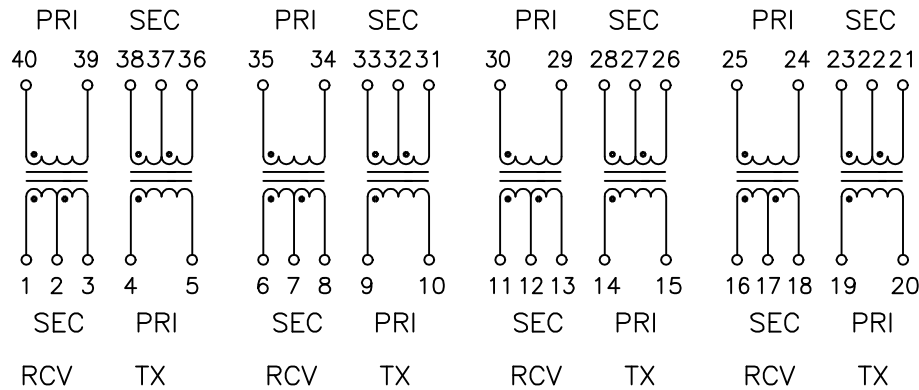

DOC. REV A/4

3. Electrical Specifications: @25°C

- Isolation: 1500 Vrms (PRI to SEC)
- TX Turns Ratio: 1:2CT ±2% (PRI:SEC)
- RCV Turns Ratio: 1:2CT ±2% (PRI:SEC)
- TX PRI OCL: 1.20mH Minimum @100KHz 50mV
- RCV PRI OCL: 1.20mH Minimum @100KHz 50mV
- Cw/w: 35pF Maximum @100KHz 50mV (PRI/SEC)
- TX PRI LL: 0.6uH Maximum @100KHz 50mV (SEC Shorted)
- RCV PRI LL: 0.6uH Maximum @100KHz 50mV (SEC Shorted)
- CROSSTALK: 65 dB Typ

Notes:

- Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Temperature rating: 155°C. UL file E151556
- Operating Temperature Range: -40°C to +85°C
- Designed to meet UL1950

XFMRs Inc UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH SHEET 1 OF 1	Title: T1/E1/CEPT QUAD PORT		
	P/N: XF0013Q3A		REV. A
	DWN.	李小锋	Sep-05-01
	CHK.	廖玉坤	Sep-05-01
	APP.	Isaiah M	Sep-05-01