

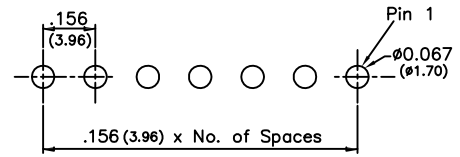
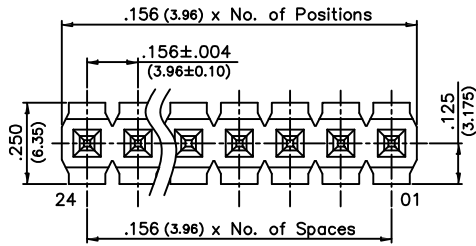


Major League Electronics .156 cl Terminal Strip Elevated Header - Straight

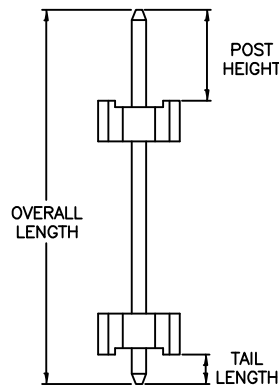

Recommended P.C. Board Layout

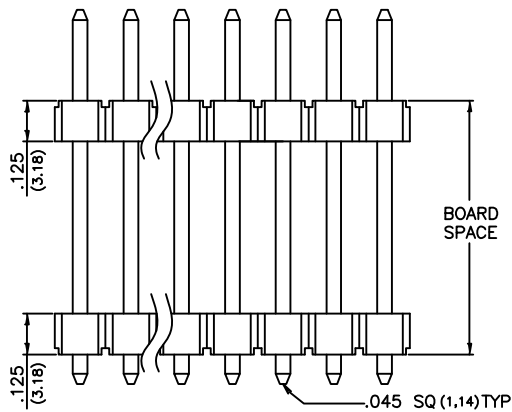

Length (L) - Board Space (B) - Tail Length (T) = Post Height (P)

Tails may be clipped to achieve desired pin length

Ordering Information

PC156BS - S - - - T - - LF

Pins Per Row
02 - 24

Row Specification
S = Single Row

Desired Tail Length
Please specify
e.g. .100 (2.54) = 100

Lead Free

Desired Board Space
Please specify
e.g. .100 (2.54) = 100

Plating Options	
T	Matte Tin All Over


Pin Options		
Overall Length		
.580	14.76mm	04
.674	17.15mm	06
.808	20.55mm	08
1.148	29.20mm	14

Specifications

- Current Rating: 7.9 Ampere
- Insulation Resistance: 5000MΩ Min.
- Dielectric Withstanding: 1500V AC/DC
- Contact Resistance: 20 mΩ Max.
- Operating Temperature: -55°C to + 105°C
- Max. Process Temperature:
 - IR Reflow: 280°C up to 10 secs.
 - Wave: 250°C up to 10 secs.
 - Manual Solder: 380°C up to 5 secs.

Materials

- Contact Material: Phosphor Bronze
- Insulator Material: LCP, UL94V-0
- Plating: Matte Tin over 50µ" (1.27) Ni

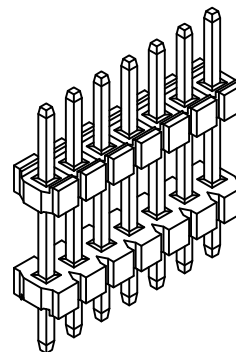

Mates with:
PC156S-XX-S-02
PC156S-XX-S-04

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES ARE:

NO PLACE DECIMALS ±0.30
ONE PLACE DECIMALS ±0.20
TWO PLACE DECIMALS ±0.15
THREE PLACE DECIMALS ±0.10

ANGLES
NO PLACE DECIMALS ±4.0°
ONE PLACE DECIMALS ±3.0°
TWO PLACE DECIMALS ±2.0°
THREE PLACE DECIMALS ±1.0°

PC156BS SERIES

.156cl Single Row - Straight, Elevated
Thru Hole Terminal Strip Header - Custom

16 APR 09

Scale
NTS



4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)

Tel: 812-944-7244
Fax: 812-944-7268

E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Edition
1

Sheet
1/1