

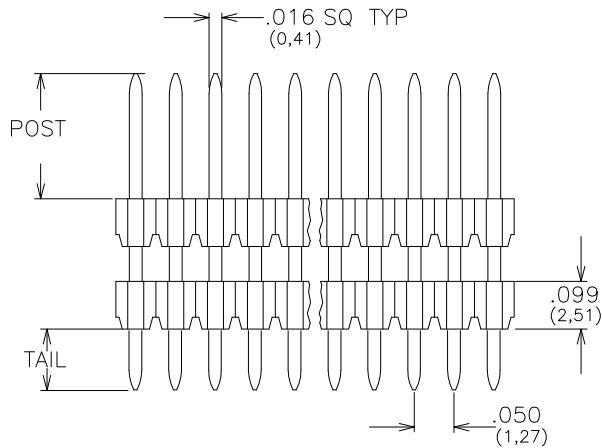
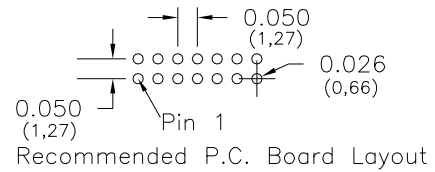



# Major League Electronics .050x.050 cl Thicker Board Stacker Terminal Strips - Custom

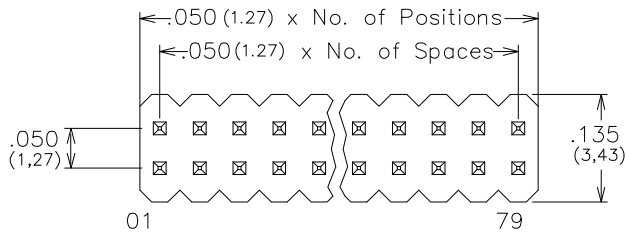

Length – Tail Length – Board Space = Post

Tails may be clipped to achieve desired pin length

## Ordering Information

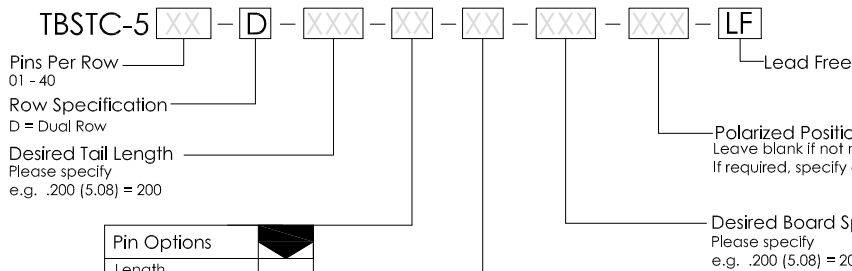

Pin Options		
Length		
.328	8.32mm	06
.430	10.92mm	08
.480	12.19mm	10
.530	13.46mm	12
.580	14.73mm	14
.630	16.00mm	16
.680	17.27mm	18
.730	18.54mm	20
.780	19.81mm	22
.830	21.08mm	24


Plating Options	
G	10µ Gold on Contact Area / Flash on Tail
T	Matte Tin All Over
GT	10µ Gold on Contact Area / Matte Tin on Tail
H	30µ Gold on Contact Area / Matte Tin on Tail
F	Gold Flash over Entire Pin

## Specifications

- Current Rating: 1.0 Ampere
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding: 300V AC
- Contact Resistance: 20 mΩ Max.
- Operating Temperature: -40°C to + 105°C
- Max. Process Temperature:
  - Peak: 260°C up to 10 secs.
  - Process: 230°C up to 60 secs.
  - Wave: 260°C up to 6 secs.
  - Manual Solder: 350°C up to 5 secs.

## Materials

- Contact Material: Phosphor Bronze
- Insulator Material: Nylon 6T
- Plating: Au or Sn over 50µ" (1.27) Ni



Mates with:  
LSSHs,  
SMSS,  
SSHs

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

**TBSTC-5-D SERIES**

.050x.050 cl Dual Row - Custom  
Thicker Board Stacker Terminal Strips

**08 FEB 07**

Scale  
NTS

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS IN INCHES (MM)  
TOLERANCES ARE:

ONE PLACE DECIMALS ±.100  
TWO PLACE DECIMALS ±.010  
THREE PLACE DECIMALS ±.005  
FOUR PLACE DECIMALS ±.0020  
ANGLES  
±5°



4235 Earnings Way, New Albany, Indiana, 47150, USA  
1-800-782-3486 (USA/Canada/Mexico)

Tel: 812-944-7244  
Fax: 812-944-7268  
E-mail: mle@mlelectronics.com  
Web: www.mlelectronics.com

Edition  
1

Sheet  
1/1