



MATERIALS	
BODY	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE

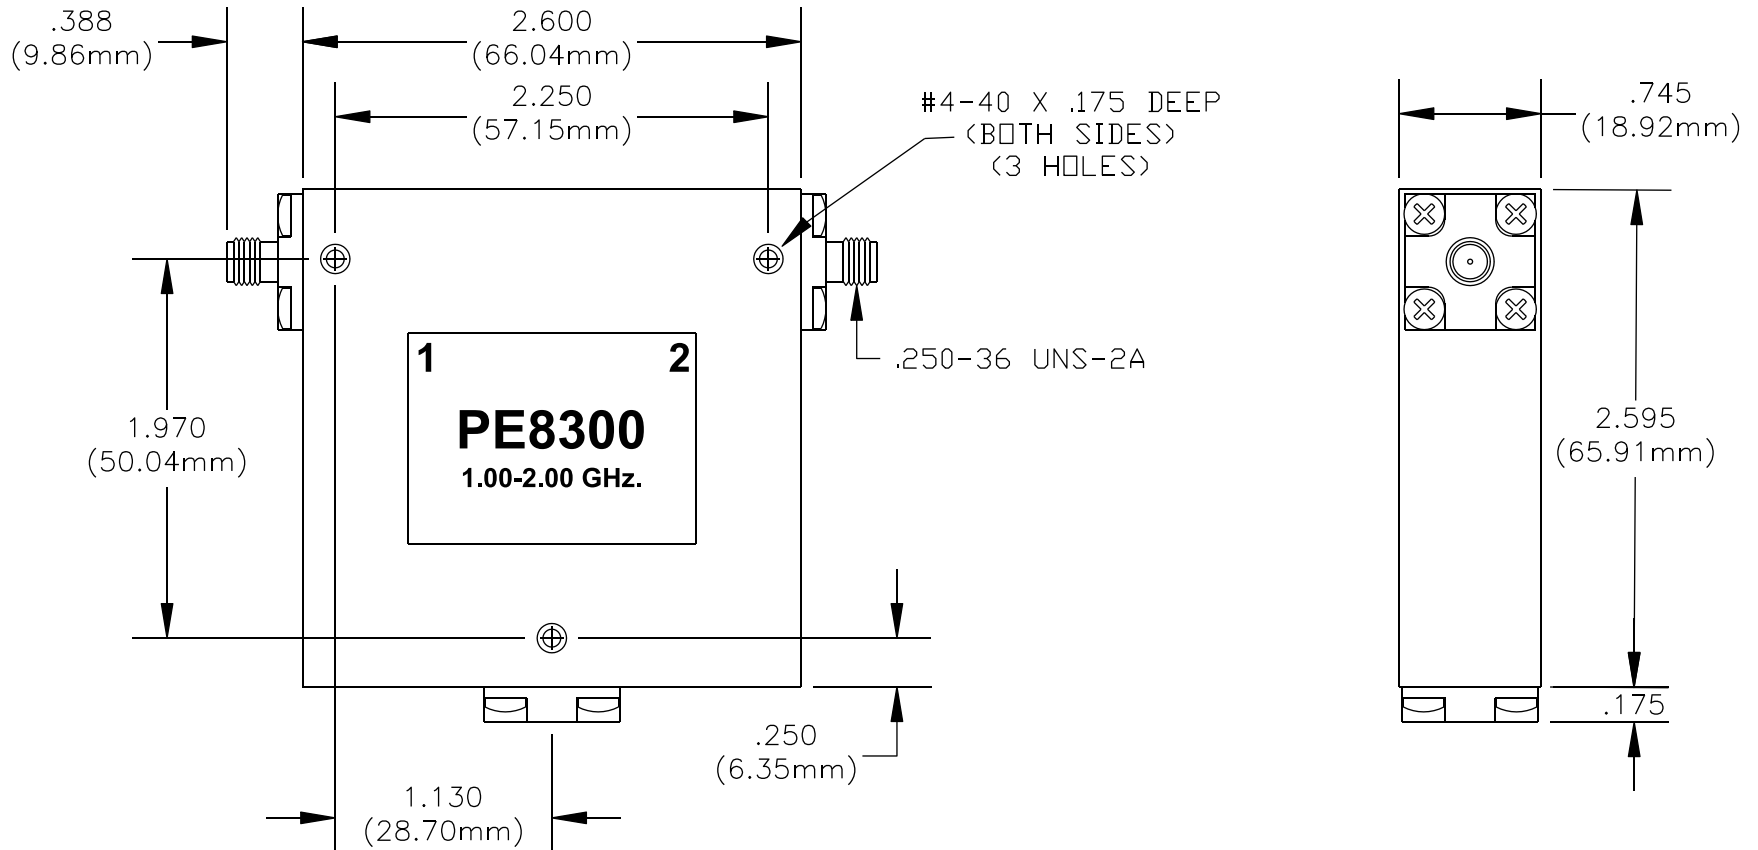

SPECIFICATIONS

FREQUENCY RANGE: 1-2 GHz
 ISOLATION MINIMUM: 18 dB
 VSWR: 1.35 MAXIMUM
 INSERTION LOSS: .6 dB MAXIMUM

 PASTERNAK ENTERPRISES <small>ESTABLISHED 1972</small>		PASTERNAK ENTERPRISES, INC. P.O. BOX 16759, IRVINE, CA 92623 PHONE (949) 261-1920 FAX (949) 261-7451 WEB ADDRESS: www.pasternack.com E-MAIL ADDRESS: sales@pasternack.com COAXIAL & FIBER OPTICS					
		DWG TITLE PE8300					
DES. FERRITE ISOLATOR, SMA FEMALE FREQUENCY RANGE: 1 TO 2 GHz		REV. A	FSCM NO. 53919	CAD FILE 082808	SCALE N/A	SIZE A	127
NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES.							