



DASH NO.	M CODE	MADE FROM
----------	--------	-----------

# GSD

KM-59-43

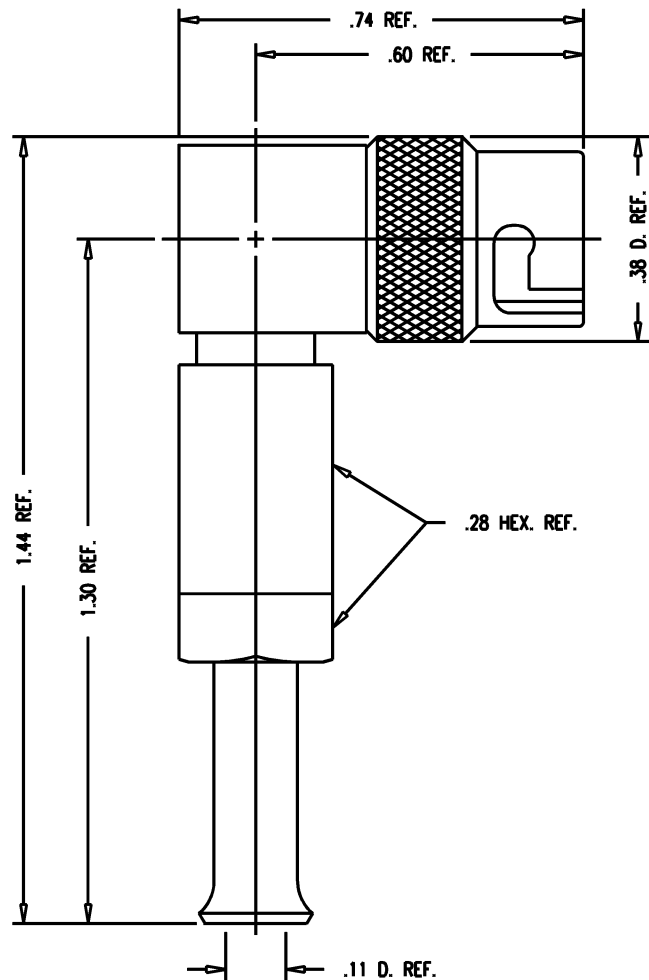

- NOTES:**
- FOR USE WITH RAYCHEM 88A1811-22 CABLE.
  - FOR CABLING INSTRUCTIONS SEE CP-485.
  - FOR CRIMPING USE DIE KTH-2011.
  - MATERIALS:**  
 INSULATORS: TEFLON, ASTM-D-1457  
 K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220  
 CONTACT F: BER. COPPER, ASTM-B-196  
 SPRING: MUSIC WIRE  
 GASKET: BUNA N, PER MIL-P-5315  
 ALL OTHER METAL PARTS: BRASS, ASTM-B16
  - FINISHES:**  
 SPRING: CADMIUM PLATE, PER QQ-P-416  
 ALL CONTACTS: HARD GOLD PLATE, PER MIL-G-45204  
 ALL OTHER METAL PARTS: SILVER PLATE, PER QQ-S-365
  - ELECTRICAL CHARACTERISTICS:**  
 NOMINAL IMPEDANCE: NON-CONSTANT  
 WORKING VOLTAGE: 500 VRMS  
 FREQUENCY RANGE: DC TO 500 MHz.
  - MARK PACKAGE: KINGS KM-59-43  
 YRWK (DATE CODE)

REVISIONS	
ISSUE	CHANGES
6	CN 28509 C CHC 11/25/86
7	CN 34332 C KH 12/07/92
8	CN 38723 E BDH 11/19/02

SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF:	
PLUG, POLARIZED, RIGHT ANGLE, KM	
DRAWN WJM	DATE 07/17/91
DESIGN MJB	DATE 07/26/91
APPR.	DATE

**KINGS**  
 ELECTRONICS CO., INC.  
 ROCK HILL, SOUTH CAROLINA 29730

KM-59-43

# GSD