

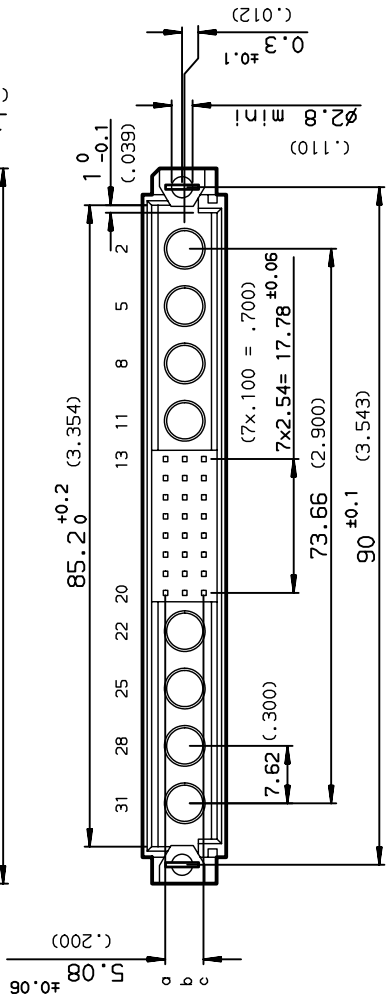
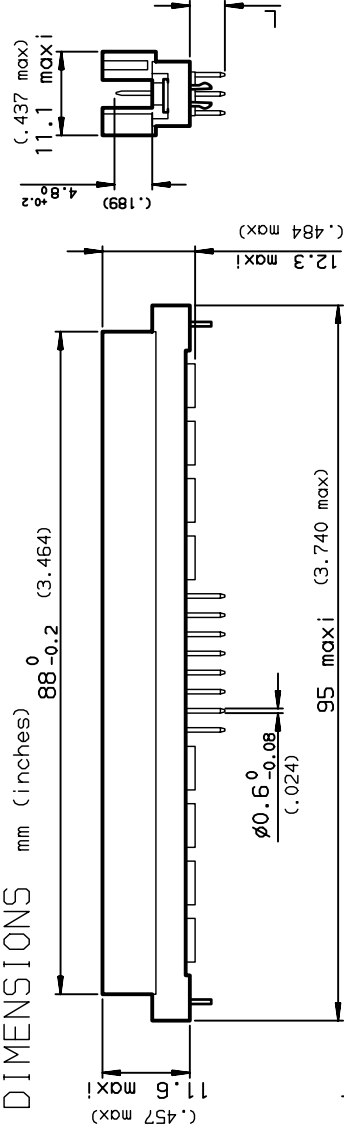


DIMENSIONS mm (inches)



PCB DRILLING

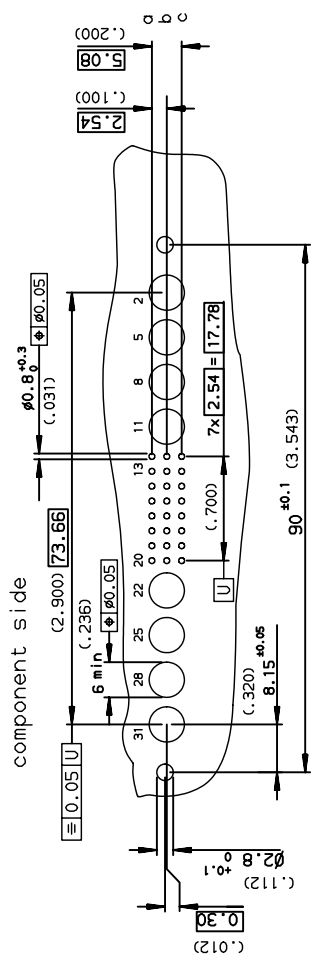

PART NUMBER	8609	68	5
PIN OUT			
rows a-b-c		3	24
rows a-c		4	16
NUMBER OF CONTACTS			
TERMINATION			
L = 17.95 ±0.25 (.706)			25
L = 2.70 ±0.25 (.106)			24
L = 4.65 ±0.25 (.183)			14
OPTIONS			
no option			7
with harpoons			A
			H
			R
PERFORMANCE CLASS			
DIN 41612 class 3			4
DIN 41612 class 2			5
DIN 41612 class 1			6
TERMINATION TYPE			
TIN LEAD			000E1
LEAD FREE			ETLF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000A

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED		size	Scale
Dr	ROUILLARD	1996/02/22	0.X ±0.1	ANGULAR	A3
Eng	TARON	1996/02/22	0.XX ±0.1	LINER	1.5
Chr	LEGAIRE	1996/02/22	0.XXX ±0.1	ECN	L508-0126
Appr	LEGAIRE	1996/02/22		Product family	Spec ref -
				DIN 8609	
				SEE TABLE	
				STRAIGHT MALE WITH SPECIAL CONTACTS	Rev. D
				SOLDER TO BOARD	C-8609-0505
				catalog no	CUSTOMER sheet 1 of 1

rev	ech no	dh	date
A	-	-	1996/02/22
B	L505-001	JTA	2005/03/01
C	L506-005	LGO	2006/06/26
D	L508-0126	HLE	2008/05/13
-	-	-	-
-	-	-	-
-	-	-	-