

Nominal diameter Withdraw. force Rated current Contact resistance

2 mm - 10 A 0.5 mΩ

Highly flexible patch cord with 2 mm (.080 in) dia. spring-loaded sockets. Sockets machined brass and gold plated with MC®-Multilam™. PVC or silicone insulated wire 0.5 mm² (20 AWG).

For operating temperature, see page 27.

Components for LK 205-BF:

- Multilam™ socket LS 205-BF # 22.1039
- Insulator (polyamide) KT 205-S # 22.2360
- Wire HK 0.5 PVC..... # 22.0010

Components for LK 205-BF Sil:

- Multilam™ socket LS 205-BF # 22.1039
- Insulator (polyamide) KT 205-S # 22.2360
- Wire HK 0.5 Sil # 22.0090

Colors: • PVC: 1, 4 • Sil: 1, 4

2 mm - 15 A 0.6 mΩ

High voltage patch cord with 2 mm (.080 in) dia. shrouded safety banana plugs. Plugs machined brass, gold plated with MC®-Multilam™. PVC insulated wire (18 AWG).

Components and ratings:

- Multilam™ plug LS 218-H # 22.1033
- Insulator (polyamide) KT 218-H # 22.2320 (Colors: 1, 2, 4)
- Wire HK 18-H PVC..... # 22.0110
- Rated voltage: 1500 V
- Test voltage: 5000 V
- Test voltage (IEC) 4350 V
- Operating temperature: -10°C to +70°C (14°F to 158°F)

For matching panel mount jack HLB 2-G, #23.0230, see page 76.

Colors: 1, 4

Type

Part No.


LK 205-BF
LK 205-BF Sil (Sil) **21.5760**
21.5810
(7.5 cm)

21.5770
(Sil) **21.5820**
(15 cm)

21.5780
(Sil) **21.5830**
(30 cm)


1.5:1
21.5790
(Sil) **21.5840**
(45 cm)

21.5800
(Sil) **21.5850**
(60 cm)

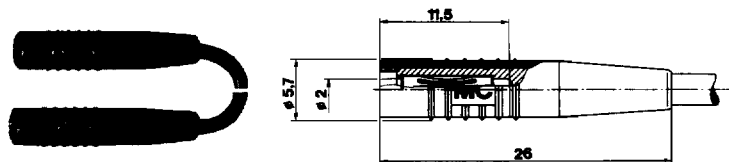

LS 205-BF


KT 205-S



1.5:1



HLK 218-L **21.0870**
(50 cm)

21.0880
(100 cm)

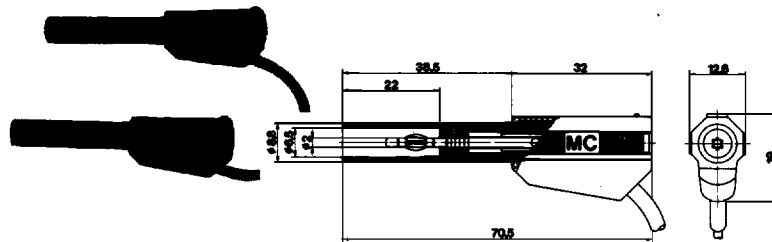

LS 218-H

KT 218-H

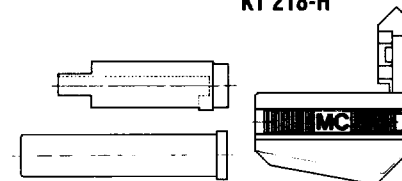

1:1.5

1:1.5

0 - green/yellow 1 - red 2 - blue 3 - white 4 - black 5 - yellow 6 - green 7 - brown 8 - gray 9 - violet