



|              |            |
|--------------|------------|
| Doc. Version | 0.3        |
| Total Page   | 19         |
| Date         | 2008/09/25 |

# Product Specification

## 4.3" COLOR TFT-LCD MODULE

**MODEL NAME: A043FW02 V2**

<  > Preliminary Specification

<  > Final Specification

Note: The content of this specification is subject to change.

© 2008 AU Optronics  
All Rights Reserved,  
Do Not Copy.



### Record of Revision

| Version | Revise Date | Page     | Content  |
|---------|-------------|----------|--|
| 0.0     | 2008/07/08  |          | First draft.   |
| 0.1     | 2008/07/21  | 6        | Modify the outline dimension of bezel opening            |
| 0.2     | 2008/09/01  | 8        | Pin assignment revised from 43 pins to 45 pins           |
|         |             | 11       | Update Suggested Application Circuit                     |
|         |             | 12       | Delete Suggested application circuit ( use SPI control ) |
|         |             | 17,18,19 | Delete Command and Register Map                          |
|         |             | 19       | Update packing form                                      |
| 0.3     | 2008/09/25  | 4        | Update Features  |

**Contents:**

|   |           |
|---|-----------|
| <b><u>A. General Description</u></b> .....                | <b>4</b>  |
| <b><u>B. Features</u></b> .....                           | <b>4</b>  |
| <b><u>C. Physical Specifications</u></b> .....            | <b>5</b>  |
| <b><u>D. Outline Dimension (Tentative)</u></b> .....      | <b>6</b>  |
| <b><u>E. Electrical Specifications</u></b> .....          | <b>7</b>  |
| 1. Pin Assignment .....                                   | 7         |
| 2. Absolute Maximum Ratings .....                         | 9         |
| 3. Electrical Characteristics .....                       | 10        |
| a. TFT- LCD Panel .....                                   | 10        |
| b. Backlight Driving Conditions .....                     | 10        |
| 4. Suggested Application Circuit .....                    | 11        |
| 5. AC Timing .....  | 12        |
| a. Power on/off sequence .....                            | 12        |
| b. Timing Condition .....                                 | 13        |
| c. Timing Diagram .....                                   | 14        |
| <b><u>F. Optical specifications (Note 1, 2)</u></b> ..... | <b>16</b> |
| <b><u>G. Reliability Test Items</u></b> .....             | <b>18</b> |
| <b><u>H. Packing Form</u></b> .....                       |           |

## A. General Description

A043FW02 V2 is an amorphous transmissive type Thin Film Transistor Liquid crystal Display (TFT-LCD). This model is composed of a TFT-LCD, a driver, an FPC (flexible printed circuit), a backlight unit.


## B. Features

- 4.3-inch display
- WQVGA resolution in RGB stripe dot arrangement
- DC/DC integrated
- High brightness
- Interfaces: parallel RGB 24-bit
- Wide viewing angle
- Integrated touch screen panel (resistive type)
- 2-in-1 FPC for LCD signals and backlight LED power
- Green design

### C. Physical Specifications

| NO. | Item                           | Unit | Specification                | Remark |
|-----|--------------------------------|------|------------------------------|--------|
| 1   | Display Resolution             | dot  | 480 RGB (H)×272(V)           |        |
| 2   | Active Area                    | mm   | 95.04(H)×53.856(V)           |        |
| 3   | Screen Size                    | inch | 4.3(Diagonal)                |        |
| 4   | Dot Pitch                      | mm   | 0.066(H)×0.198(V)            |        |
| 5   | Color Configuration            | --   | R. G. B. Stripe              | Note 1 |
| 6   | Color Depth                    | --   | 16.7M Colors                 |        |
| 7   | Overall Dimension              | mm   | 105.5(H) × 67.2(V) × 2.88(T) | Note 2 |
| 8   | Weight                         | g    | 44                           |        |
| 9   | Display Mode                   | --   | Normally White               |        |
| 10  | Gray Level Inversion Direction |      | 6 O'clock                    |        |


Note 1: Below figure shows dot stripe arrangement.

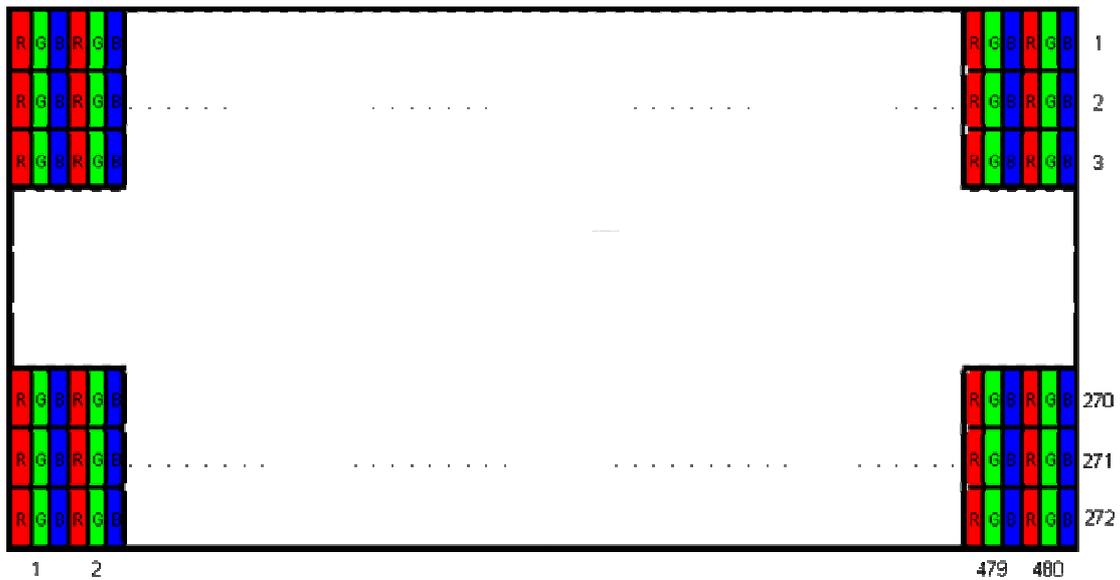

Note 2: Not including FPC. Refer to the drawing next page for further information.

### D. Outline Dimension (Tentative)

- NOTES:
1. General tolerance  $\pm 0.3$ .
  2. The bending radius of FPC should be larger than 0.6.
  3. \*\*\* The thickness of solder area.

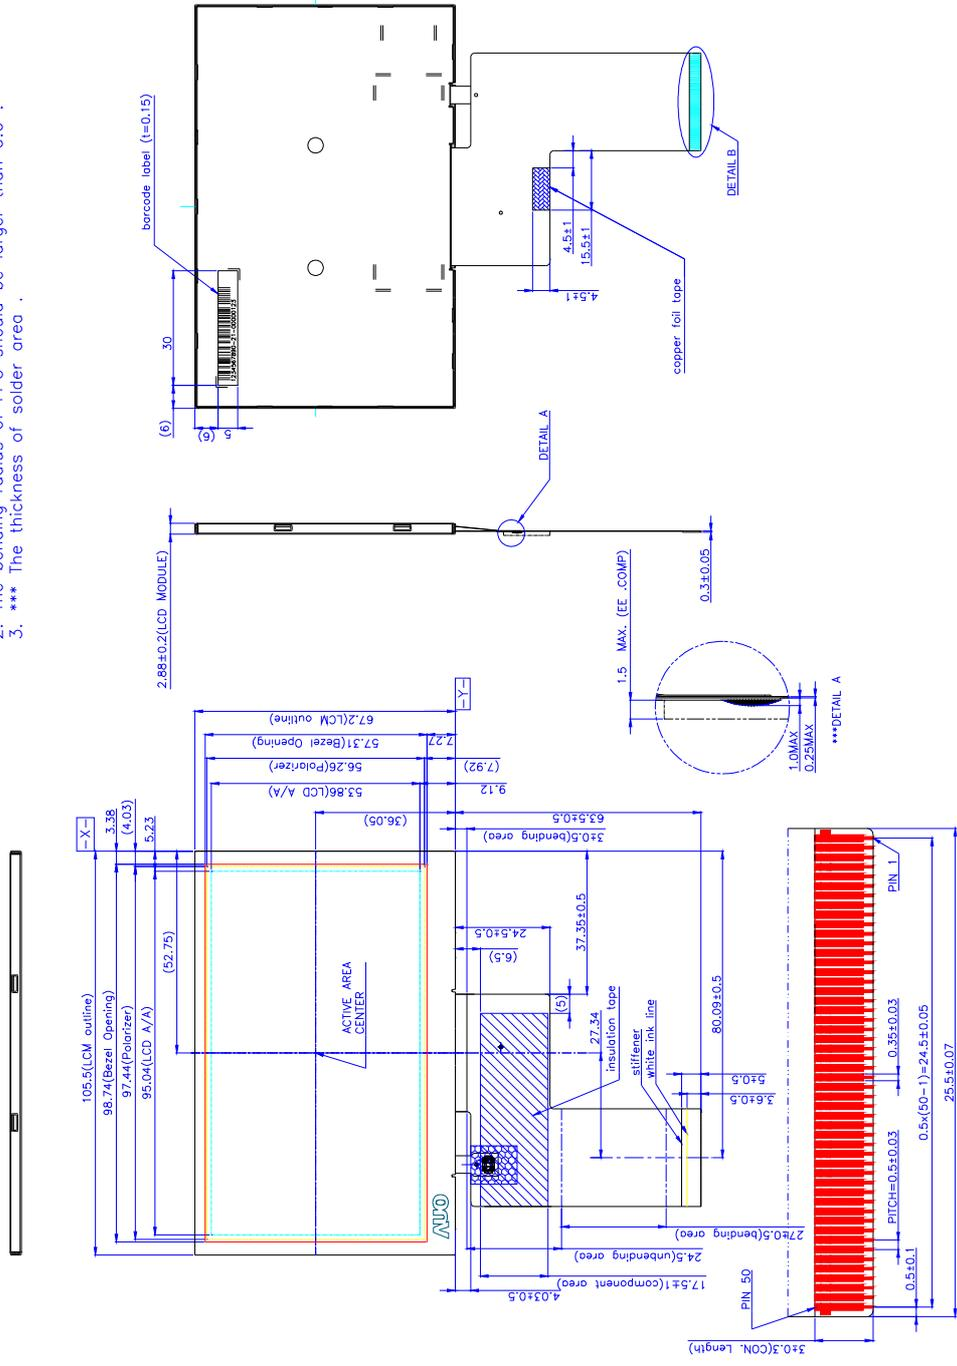

DETAIL B SCALE 5/1

## E. Electrical Specifications

### 1. Pin Assignment

| No. | Pin Name | I/O | Description                        | Remarks |
|-----|----------|-----|------------------------------------|---------|
| 1   | GND      | G   | GND                                |         |
| 2   | GND      | G   | GND                                |         |
| 3   | VDD      | PI  | Power supply for analog circuit    |         |
| 4   | VDDIO    | PI  | Power supply for digital interface |         |
| 5   | R0       | I   | Red Data Signal (LSB)              |         |
| 6   | R1       | I   | Red Data Signal                    |         |
| 7   | R2       | I   | Red Data Signal                    |         |
| 8   | R3       | I   | Red Data Signal                    |         |
| 9   | R4       | I   | Red Data Signal                    |         |
| 10  | R5       | I   | Red Data Signal                    |         |
| 11  | R6       | I   | Red Data Signal                    |         |
| 12  | R7       | I   | Red Data Signal (MSB)              |         |
| 13  | G0       | I   | Green Data Signal (LSB)            |         |
| 14  | G1       | I   | Green Data Signal                  |         |
| 15  | G2       | I   | Green Data Signal                  |         |
| 16  | G3       | I   | Green Data Signal                  |         |
| 17  | G4       | I   | Green Data Signal                  |         |
| 18  | G5       | I   | Green Data Signal                  |         |
| 19  | G6       | I   | Green Data Signal                  |         |
| 20  | G7       | I   | Green Data Signal (MSB)            |         |
| 21  | B0       | I   | Blue Data Signal (LSB)             |         |
| 22  | B1       | I   | Blue Data Signal                   |         |
| 23  | B2       | I   | Blue Data Signal                   |         |
| 24  | B3       | I   | Blue Data Signal                   |         |
| 25  | B4       | I   | Blue Data Signal                   |         |
| 26  | B5       | I   | Blue Data Signal                   |         |
| 27  | B6       | I   | Blue Data Signal                   |         |
| 28  | B7       | I   | Blue Data Signal (MSB)             |         |
| 29  | GND      | G   | GND                                |         |
| 30  | DCLK     | I   | Pixel clock                        |         |
| 31  | DISP     | I   | Display on/off signal              |         |
| 32  | HSYNC    | I   | Horizontal synchronizing signal    |         |
| 33  | VSYNC    | I   | Vertical synchronizing signal      |         |

|    |       |    |                          |  |
|----|-------|----|--------------------------|--|
| 34 | DE    | I  | Data enable              |  |
| 35 | U/D   | -  | Scan direction selection |  |
| 36 | NC    | -  | NC                       |  |
| 37 | GND   | G  | GND                      |  |
| 38 | GND   | G  | GND                      |  |
| 39 | NC    | -  | NC                       |  |
| 40 | NC    | -  | NC                       |  |
| 41 | NC    | -  | NC                       |  |
| 42 | NC    | -  | NC                       |  |
| 43 | GND   | G  | GND                      |  |
| 44 | GND   | G  | GND                      |  |
| 45 | GND   | G  | GND                      |  |
| 46 | VLED- | PI | LED backlight cathode    |  |
| 47 | VLED+ | PI | LED backlight anode      |  |
| 48 | GND   | G  | GND                      |  |
| 49 | GND   | G  | GND                      |  |
| 50 | GND   | G  | GND                      |  |

I: Digital signal input, O: Digital signal output, G: GND, PI: Power input, C: Capacitor

## 2. Absolute Maximum Ratings

| Items                    | Symbol   | Values |      | Unit | Condition |
|--------------------------|----------|--------|------|------|-----------|
|                          |          | Min.   | Max. |      |           |
| Power Supply Voltage     | VDD      | -0.3   | 4.5  | V    |           |
| Interface Supply Voltage | VDDIO    | -0.3   | 4.5  | V    |           |
| LED Reverse Voltage      | $V_r$    | --     | 3.5  | V    | One LED   |
| LED Forward Current      | $I_f$    | --     | 25   | mA   | One LED   |
| Operation Temperature    | $T_{op}$ | -20    | 70   | °C   |           |
| Storage Temperature      | $T_{st}$ | -30    | 80   | °C   |           |

Note 1.If the operating condition exceeds the absolute maximum ratings, the TFT-LCD module may be damaged permanently. Also, if the module operated with the absolute maximum ratings for a long time, its reliability may drop.

### 3. Electrical Characteristics

The following items are measured under stable condition and suggested application circuit.

#### a. TFT- LCD Panel


| Parameter                | Symbol      | Min        | Typ | Max        | Unit | Notes |
|--------------------------|-------------|------------|-----|------------|------|-------|
| Power Supply Voltage     | VDD         | 3          | 3.3 | 3.6        | V    |       |
| Interface Supply Voltage | VDDIO       | 1.7        | 3.3 | VDD        | V    |       |
| Input Signal Voltage     | $V_{ih}$    | 0.7* VDDIO | --  | VDDIO      | V    |       |
|                          | $V_{il}$    | GND        | --  | 0.3* VDDIO | V    |       |
| Power Supply Current     | $I_{VDD}$   | TBD        | TBD | TBD        | mA   |       |
| Frame Frequency          | $f_{Frame}$ | --         | 60  | 70         | Hz   |       |
| Dot Data Clock           | DCLK        | --         | 9.2 | --         | MHz  |       |

Note 1. Panel surface temperature should be kept less than content of section E.2. "Absolute maximum ratings"

#### b. Backlight Driving Conditions


| Parameter     | Symbol | Min.   | Typ. | Max. | Unit | Remark        |
|---------------|--------|--------|------|------|------|---------------|
| LED Supply    | $I_L$  |        | 20   |      | mA   | single serial |
| LED Supply    | $V_L$  |        | 32   |      | V    | single serial |
| LED Life Time | $L_L$  | 10,000 | ---  | ---  | Hr   | Note 2        |

Note 1: LED backlight is 10 LEDs serial type.



Note 2: The LED lifetime could be decreased if operating  $I_L$  is larger than 25mA


### 4. Suggested Application Circuit

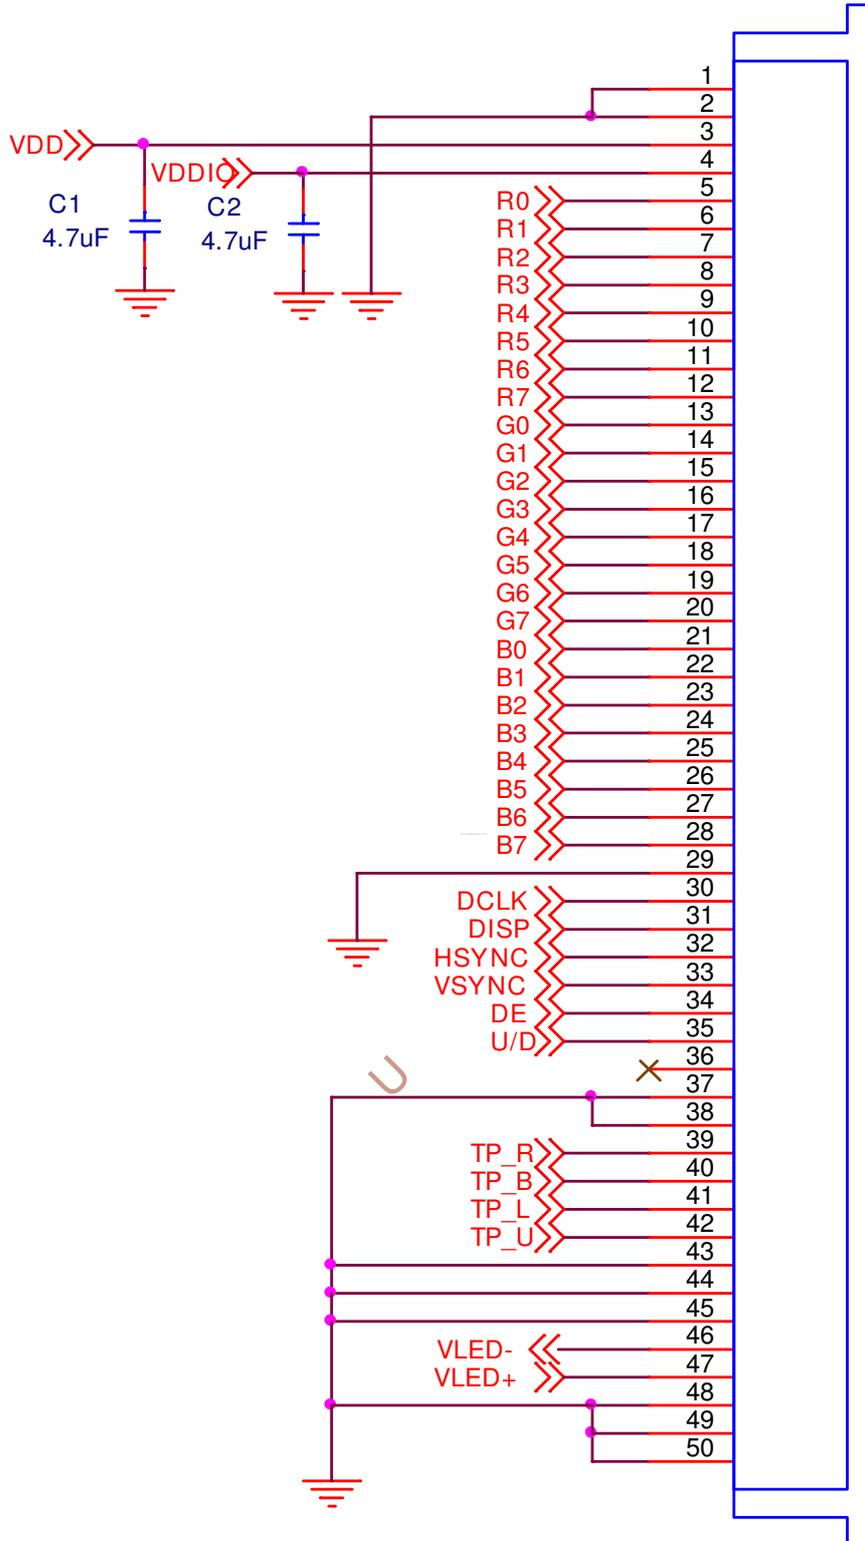

## 5. AC Timing


### a. Power on/off sequence

#### Power On (Display ON; Standby Disabling)

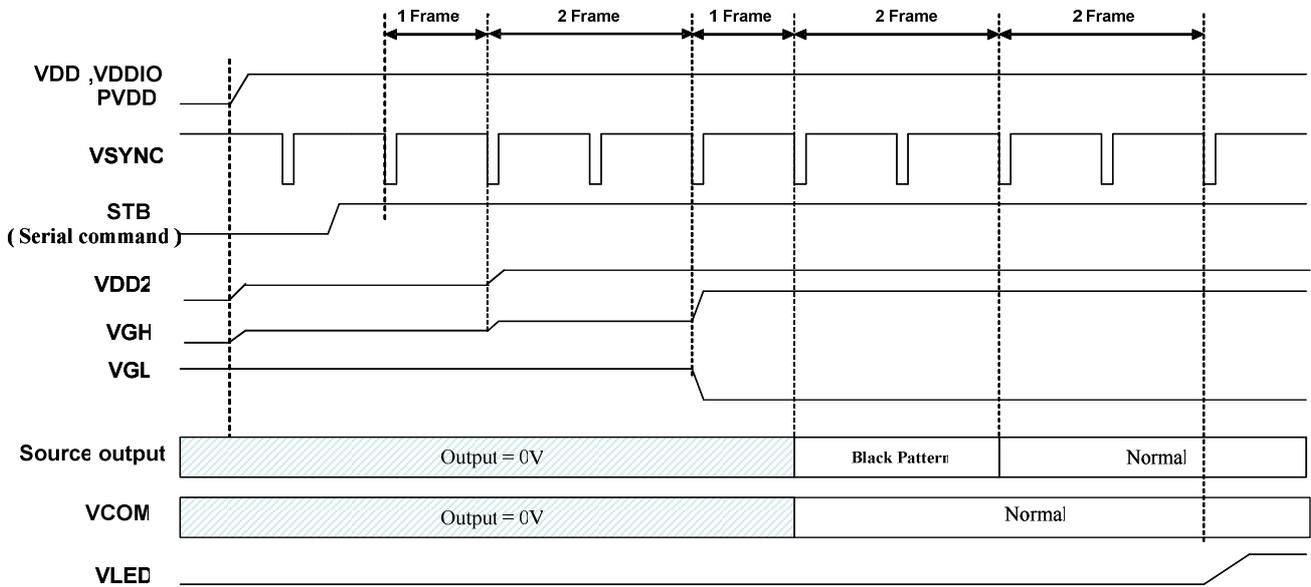

STB(DISP): The driver IC default is on standby mode. It can be changed to normal operation by using DISP hard pin or serial command.

#### Power-Off (Display Off; Standby Enabling)

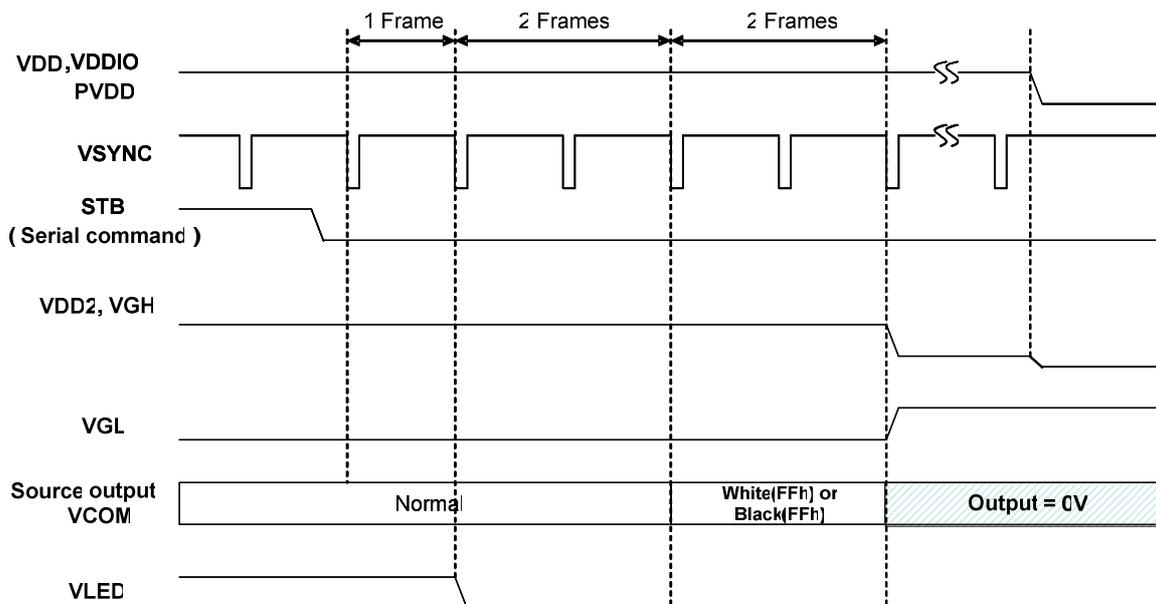


**b. Timing Condition**


| Parameter             |                | Symbol | Min. | Typ. | Max. | Unit. | Remark |
|-----------------------|----------------|--------|------|------|------|-------|--------|
| Clock                 | Frequency      | 1/Tc   | 5    | 9.2  | 12   | MHz   |        |
|                       | CLK pulse duty | Tcwh   | 40   | --   | --   | ns    |        |
|                       | CLK pulse duty | Tcwl   | 40   | --   | --   | ns    |        |
| Data                  | Setup Time     | Tdsu   | 12   | --   | --   | ns    |        |
|                       | Hold Time      | Tdhd   | 12   | --   | --   | ns    |        |
| DE                    | Setup Time     | Tdesu  | 12   | --   | --   | ns    |        |
|                       | Hold Time      | Tdehd  | 12   | --   | --   | ns    |        |
| Frame Frequency       | Cycle          | tv     |      | 16.7 |      | ms    |        |
| 1 Frame Scanning Time | Cycle          | tv     | 275  | 288  | 335  | H     |        |
|                       | Display Period | tvdisp | 272  |      |      | H     |        |
|                       | Front porch    | Tvfp   | 1    | 4    | --   | H     |        |
|                       | Pulse width    | Tvw    | 1    | 10   | --   | H     |        |
|                       | Back porch     | Tvbp   | 2    | 12   | --   | H     |        |
| 1 Line Scanning Time  | Cycle          | Th     | 490  | 531  | 605  | DCLK  |        |
|                       | Display Period | Thdisp | 480  |      |      | DCLK  |        |
|                       | Front porch    | Thfp   | 2    | 8    | --   | DCLK  |        |
|                       | Pulse width    | Thw    | 1    | 1    | --   | DCLK  |        |
|                       | Back porch     | thbp   | 8    | 43   | --   | DCLK  |        |

**c. Timing Diagram**


**Vertical Timing of Input (Sync mode)**

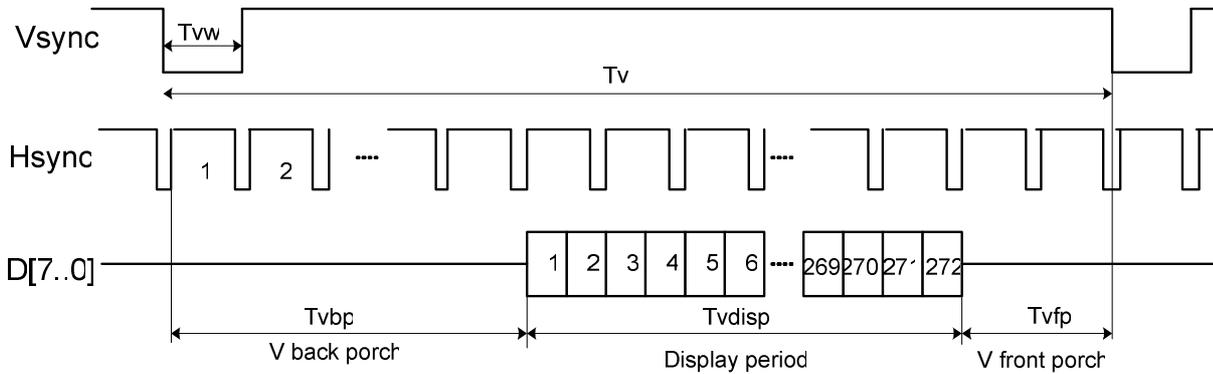


**Horizontal Timing of Input (Sync mode)**

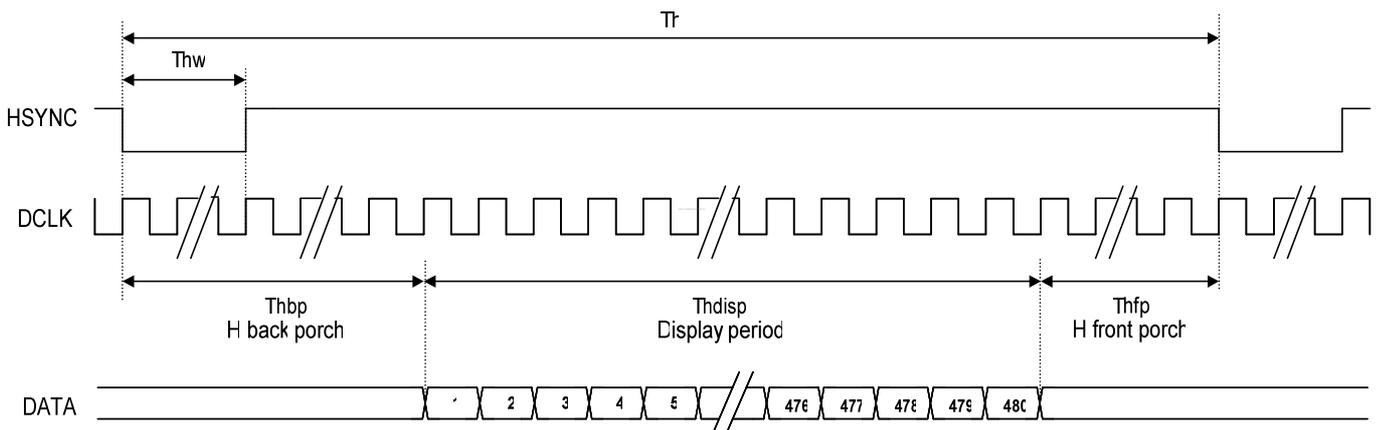


**Vertical Timing of Input (Sync-DE mode)**

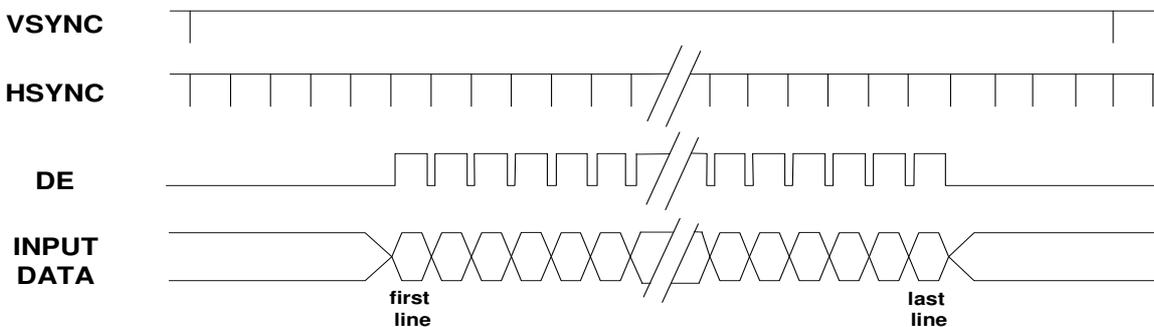

### Horizontal Timing of Input (Sync-DE mode)

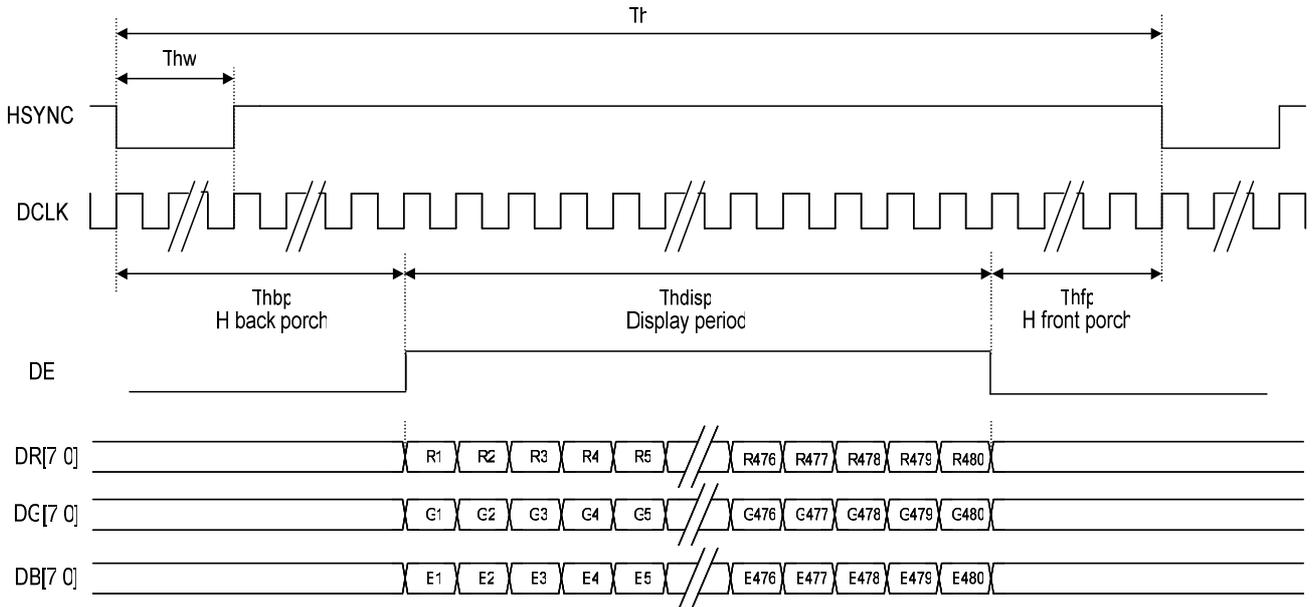

### Clock and data input timing diagram

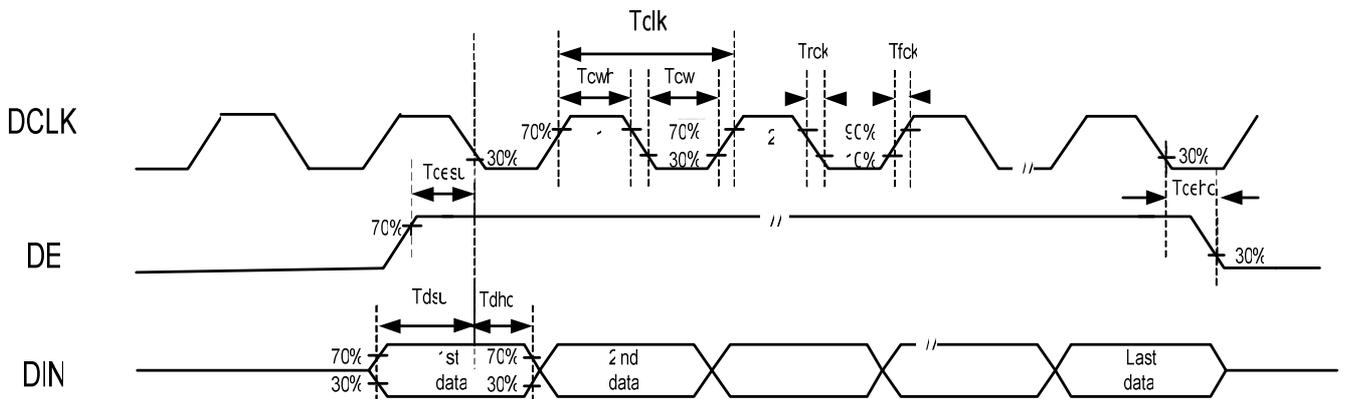

## F. Optical specifications (Note 1, 2)


| Item               | Symbol | Condition                  | Min. | Typ. | Max. | Unit              | Remark    |
|--------------------|--------|----------------------------|------|------|------|-------------------|-----------|
| Response Time      |        |                            |      |      |      |                   |           |
| Rise               | Tr     | $\theta = 0^\circ$         | -    | 15   |      | ms                | Note 3    |
| Fall               | Tf     |                            | -    | 20   |      | ms                |           |
| Contrast ratio     | CR     | At optimized viewing angle | 200  | 300  | -    |                   | Note 5, 6 |
| Viewing Angle      |        |                            |      |      |      |                   |           |
| Top                |        | CR $\geq 10$               |      | 50   | -    | deg.              | Note 7, 8 |
| Bottom             |        |                            | 60   | -    |      |                   |           |
| Left               |        |                            | 70   | -    |      |                   |           |
| Right              |        |                            | 70   | -    |      |                   |           |
| Brightness         | $Y_L$  | $\theta = 0^\circ$         | 420  | 500  |      | cd/m <sup>2</sup> | Note 9    |
| White Chromaticity | X      | $\theta = 0^\circ$         | 0.27 | 0.32 | 0.37 |                   |           |
|                    | y      | $\theta = 0^\circ$         | 0.29 | 0.34 | 0.39 |                   |           |

Note 1: Measurement should be performed in the dark room, optical ambient temperature =25°C, and backlight current  $I_L=20$  mA

Note 2: To be measured on the center area of panel with a field angle of 1°by Topcon luminance meter BM-7, after 10 minutes operation.

Note 3: Definition of response time:

The output signals of photo detector are measured when the input signals are changed from "black" to "white"(falling time) and from "white" to "black"(rising time), respectively.

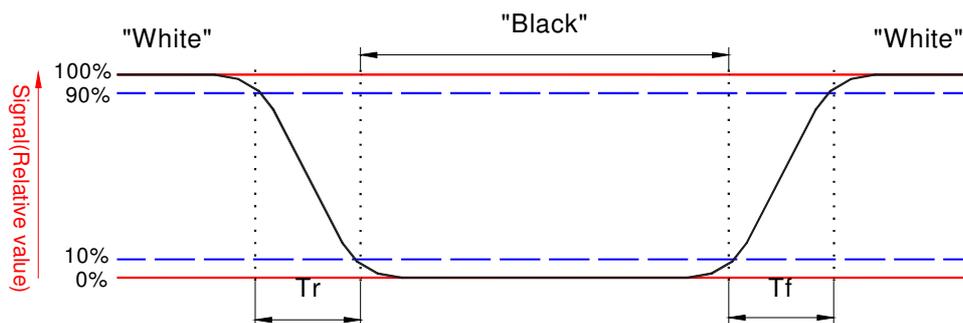


Note 4. From liquid crystal characteristics, response time will become slower and the color of panel will become darker when ambient temperature is below 25°C.

Note 5. Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

Note 6. Definition of viewing angle: refer to figure as below.

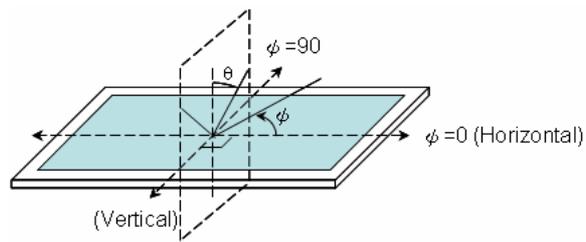

Note 7. The viewing angles are measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

Note 8. Brightness is measured at the center of the display perpendicular to the panel surface.

### G. Reliability Test Items

| No. | Test items                       | Conditions  |        | Remark        |
|-----|----------------------------------|---|--------|---------------|
| 1   | High Temperature Storage         | Ta= 80°C  | 240Hrs |               |
| 2   | Low Temperature Storage          | Ta= -30°C   | 240Hrs |               |
| 3   | High Temperature Operation       | Ta= 70°C  | 240Hrs |               |
| 4   | Low Temperature Operation        | Ta= -20°C   | 240Hrs |               |
| 5   | High Temperature & High Humidity | Ta= 60°C. 90% RH  | 240Hrs | Operation     |
| 6   | Heat Shock                       | -25°C ~70°C, 50 cycle, 2Hrs/cycle   |        | Non-operation |
| 7   | Vibration (With Carton)          | Random vibration:<br>0.015G <sup>2</sup> /Hz from 5~200Hz<br>-6dB/Octave from 200~500Hz |        | IEC 68-34     |
| 8   | Drop (With Carton)               | Height: 60cm<br>1 corner, 3 edges, 6 surfaces   |        |               |

Note 1: Ta: Ambient temperature.

Note 2: In the standard condition, there is not display function NG issue occurred. All the cosmetic specification is judged before the reliability stress.

## H. Packing Form

