





Low Profile Miniature Glass Passivated Single-Phase Surface Mount Bridge Rectifiers

Case Style Low Profile DFS

Reverse Voltage 50 to 1400V
Forward Current 1.5A

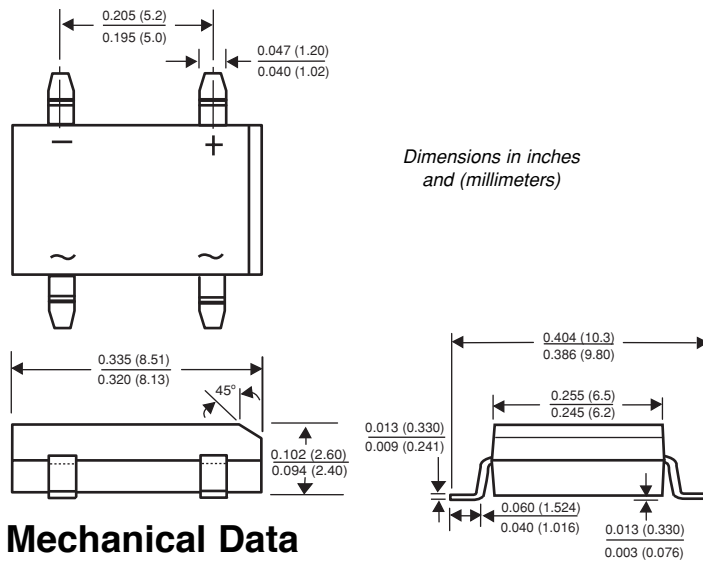

Mounting Pad Layout



Mechanical Data

- Case:** Molded plastic body over passivated junctions
- Terminals:** Plated leads solderable per MIL-STD-750, Method 2026
- High temperature soldering guaranteed:
260°C/10 seconds at 5 lbs. (2.3kg) tension
- Polarity:** Polarity symbols marked on body
- Mounting Position:** Any **Weight:** 0.014 oz., 0.4 g
- Packaging codes/options:**
27/1.5K per 13" Reel (16mm Tape)
45/50 ea. per Tube-Bulk

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- This series is UL listed under Recognized Component Index, file number E54214
- Glass passivated chip junctions
- High surge overload rating of 50 Amperes peak
- Ideal for printed circuit boards

Maximum Ratings and Thermal Characteristics (T_A = 25°C unless otherwise noted)

Parameter	Symbol	DFL15005S	DFL1501S	DFL1502S	DFL1504S	DFL1506S	DFL1508S	DFL1510S	DFL1514S	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	1400	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	980	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	1400	V
Maximum average forward output rectified current at T _A = 40°C ⁽²⁾	I _{F(AV)}	1.5								A
Peak forward surge current single half sine-wave superimposed on rated load (JEDEC Method) T _J = 150°C	I _{FSM}	50								A
Rating for fusing (t < 8.3ms)	I ² t	10								A ² sec
Typical thermal resistance per leg ⁽²⁾	R _{θJA}	40								°C/W
	R _{θJL}	15								
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150								°C

Electrical Characteristics (T_A = 25°C unless otherwise noted)

Max. instantaneous forward voltage drop per leg at 1.5A	V _F	1.1	V
Maximum DC reverse current at rated DC blocking voltage per leg	T _A = 25°C	5.0	μA
	T _A = 125°C	500	
Typical junction capacitance per leg ⁽¹⁾	C _J	16	pF

Notes: (1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
(2) Units mounted on P.C.B. with 0.51 x 0.51" (13 x 13mm) copper pads

Vishay Semiconductors
formerly General Semiconductor

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 - Forward Current Derating Curve Per Leg

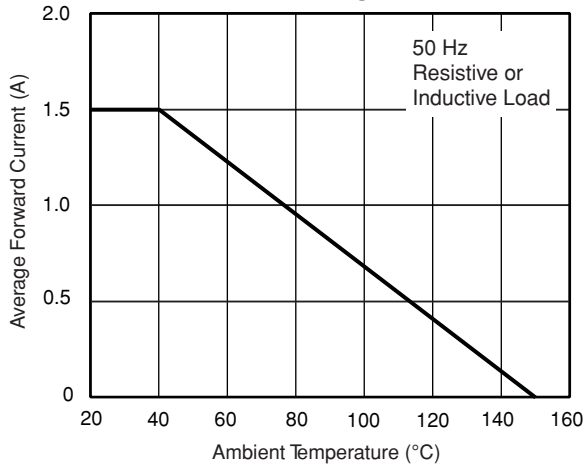


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

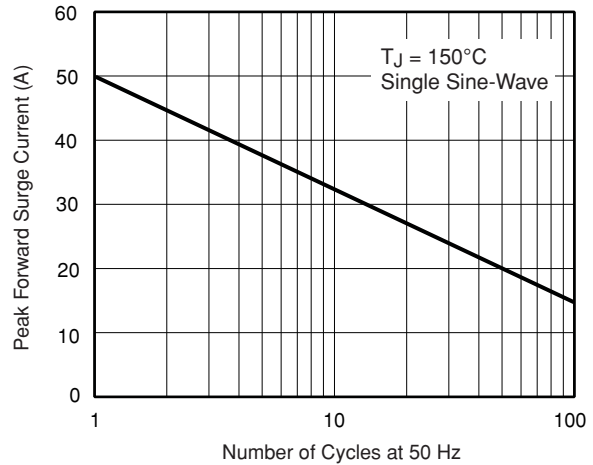


Fig. 3 - Typical Forward Characteristics Per Leg

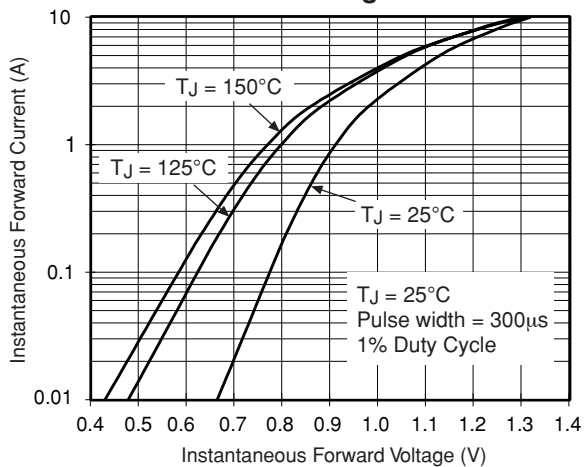


Fig. 4 - Typical Reverse Characteristics Per Leg

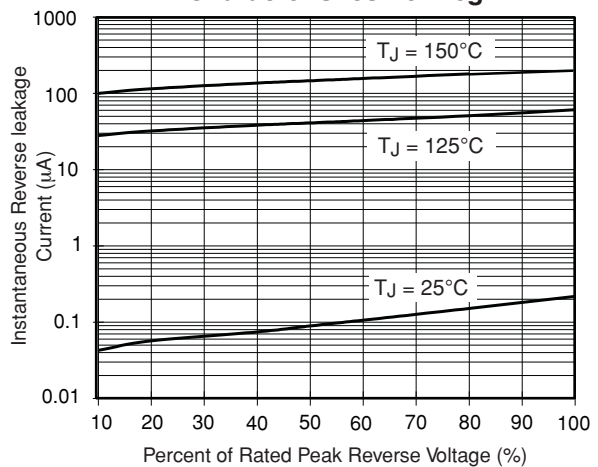


Fig. 5 - Typical Junction Capacitance Per Leg

