


# ELFD SERIES PART NUMBERING SCHEME

REV	ECN	APPD
-	3741	JEC 4/21/99
A	3865	JC 11/9/99
B	5354	JT 11/10/03
C	5742	RN 12/28/05

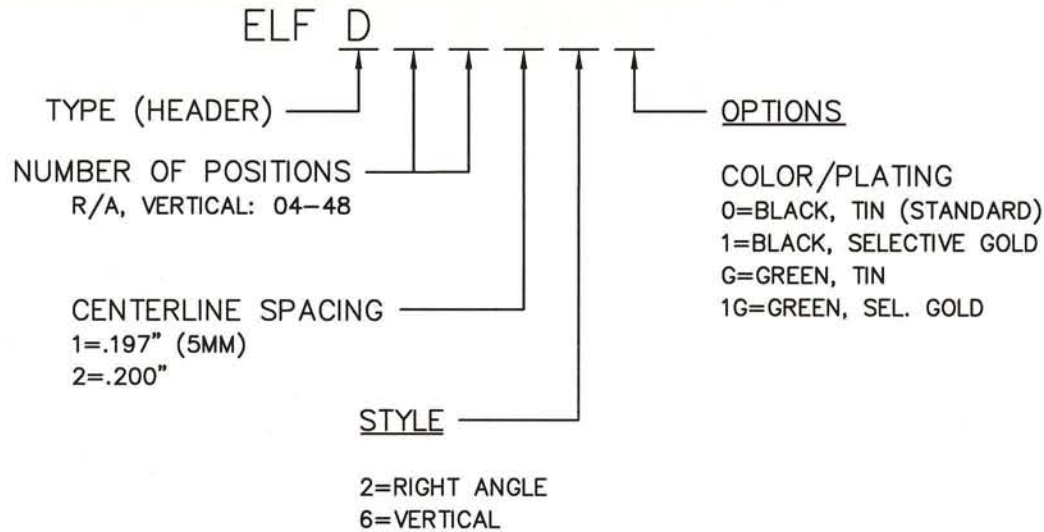

CONSULT PCD FOR PART NO. AND AVAILABILITY OF FOLLOWING OPTIONS:

- CUSTOM COLORS
- CUSTOM MARKING
- CUSTOM KEYING
- SELECTIVE CONTACT LOADING

**RU**  
RATINGS  
CURRENT - 15A  
VOLTAGE - 300V  
U.L. FILE NO. EB3421

**SP**  
RATINGS  
CURRENT - 15A  
VOLTAGE - 300V  
CSA FILE NO. LR69703


DIN VDE 0627:1986  
DIN VDE 0110-1:1989  
EN 60947-1:1991  
EN 60947-7-1:1992

CURRENT - 15A  
VOLTAGE - 300 V  
TUV FILE NO. 20396


MATERIALS:  
HOUSING: PBT, UL 94 V-0; STANDARD TEMP.  
CONTACT: BRASS

MAX OPERATING TEMPERATURE:  
105°C

DIMENSIONS ANSI Y14.5M UNITS: INCHES ACAD FILE	TOLERANCES .XX ±.01 .XXX ±.005 ANGLES ±2°	PROJECTION 	<b>Amphenol Pcd</b> SPECIFICATION DRAWING		TITLE ELFD SERIES 2-TIER STACKABLE HEADER MODULE		
			ENGR J. WILKINSON	4/19/99			
ORIGINAL STAMPED IN RED	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC. PEABODY, MA		CHKD A. PATRIE	4/21/99	SIZE A	DWG NO. ELFD04260	REV C
			APPD J. CAHALY	4/21/99	CODE: 58982	SCALE: NONE	SHEET 1 OF 2

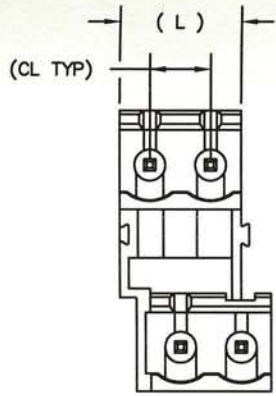


**ELFD04XX0**  
4 POS HDR

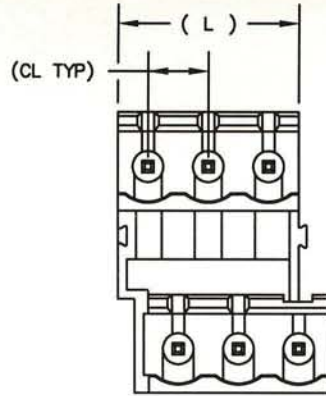


**ELFD06XX0**  
6 POS HDR


L=NUM OF POS X CL SPACING

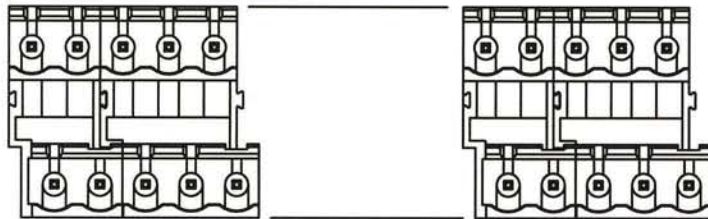

**ELFDXX260**  
ELFD ASSEMBLY, XX POSITIONS

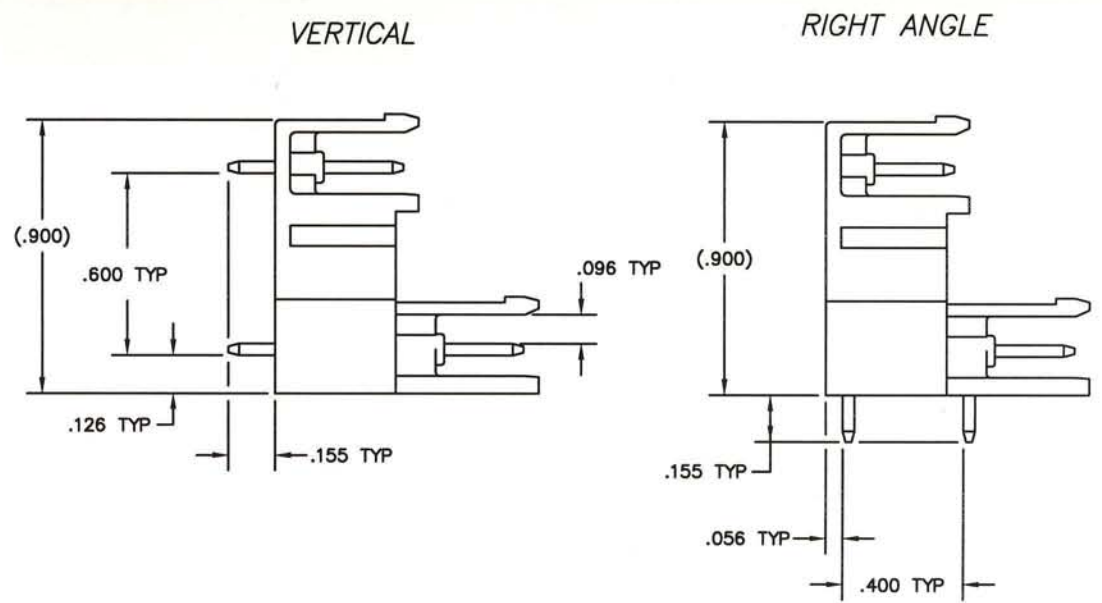

**PRINTED CIRCUIT BOARD CONFIGURATION**

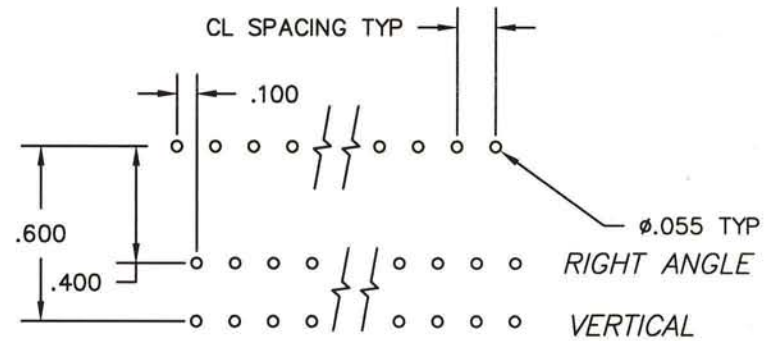

RECOMMENDED PCB THICKNESS: .062±.008

SIZE	DWG NO.	REV
A	ELFD04260	C
CODE: 58982	SCALE: NONE	SHEET 2 OF 2