


# Type 4X Stainless Steel Wallmount Enclosure 1418 N4

## SS Series

### Continuous Hinge Door with Clamps

English | [Français](#)



## Application

- Designed for use as instrument enclosures, electric, hydraulic or pneumatic control housings, electrical junction boxes or terminal wiring enclosures.
- Provides protection where equipment may be hosed down or otherwise be very wet, or in specific applications where corrosion is a serious problem.

## Standards

- UL 508 Type 3R, 4, 4X, and 12
- CSA Type 3R, 4, 4X, and 12
- Complies with
  - NEMA Type 3R, 4, 4X, 12 and 13
  - JIC EGP-1-1967 unless marked<sup>1</sup>
  - IEC 60529, IP66

## Construction

- Formed 14 gauge 304 or 316 stainless steel.
- Smooth, continuously welded seams without knockouts, cutouts or holes.
- Door stiffeners are provided in the larger enclosures for extra rigidity.
- Welded brackets provide for enclosure mounting.
- Formed lip on door and enclosure excludes flowing liquids and contaminants.
- Stainless steel continuous hinge on door may be removed by pulling the stainless steel hinge pin.
- Door is secured with easily operated stainless steel clamps.
- Provision for padlocking.
- Seamless poured-in place gasket.
- A removable 12 gauge inner panel is included.
- Collar studs are provided for mounting inner panels.
- A bonding stud is provided on the door and a grounding stud is provided in the enclosure.
- A literature pocket is provided for the inside of the door.


## Finish

- Cover and enclosure are natural stainless steel with a smooth brushed finish.
- Removable inner panel is finished in white powder coating.

## Accessories

- [Inner Panels](#)
- [Blowers and Fans](#)
- [Door Clamping Hardware](#)
- [Door Support Guide](#)
- [Enclosure Stabilizers](#)
- [Filtered Fans](#)
- [Lock kit](#)
- [Wallmount Quick Release Clamp](#)
- [Temperature Controls](#)

- [Cooling Products](#)
- [Breather Kits](#)
- [Door Stop Kit](#)
- [Drip Shield Kit](#)
- [Floor Stand Kit](#)
- [Heaters](#)
- [Type 1 Louvered Ventilating Plates](#)
- [Terminal Kits](#)
- [Window Kits](#)

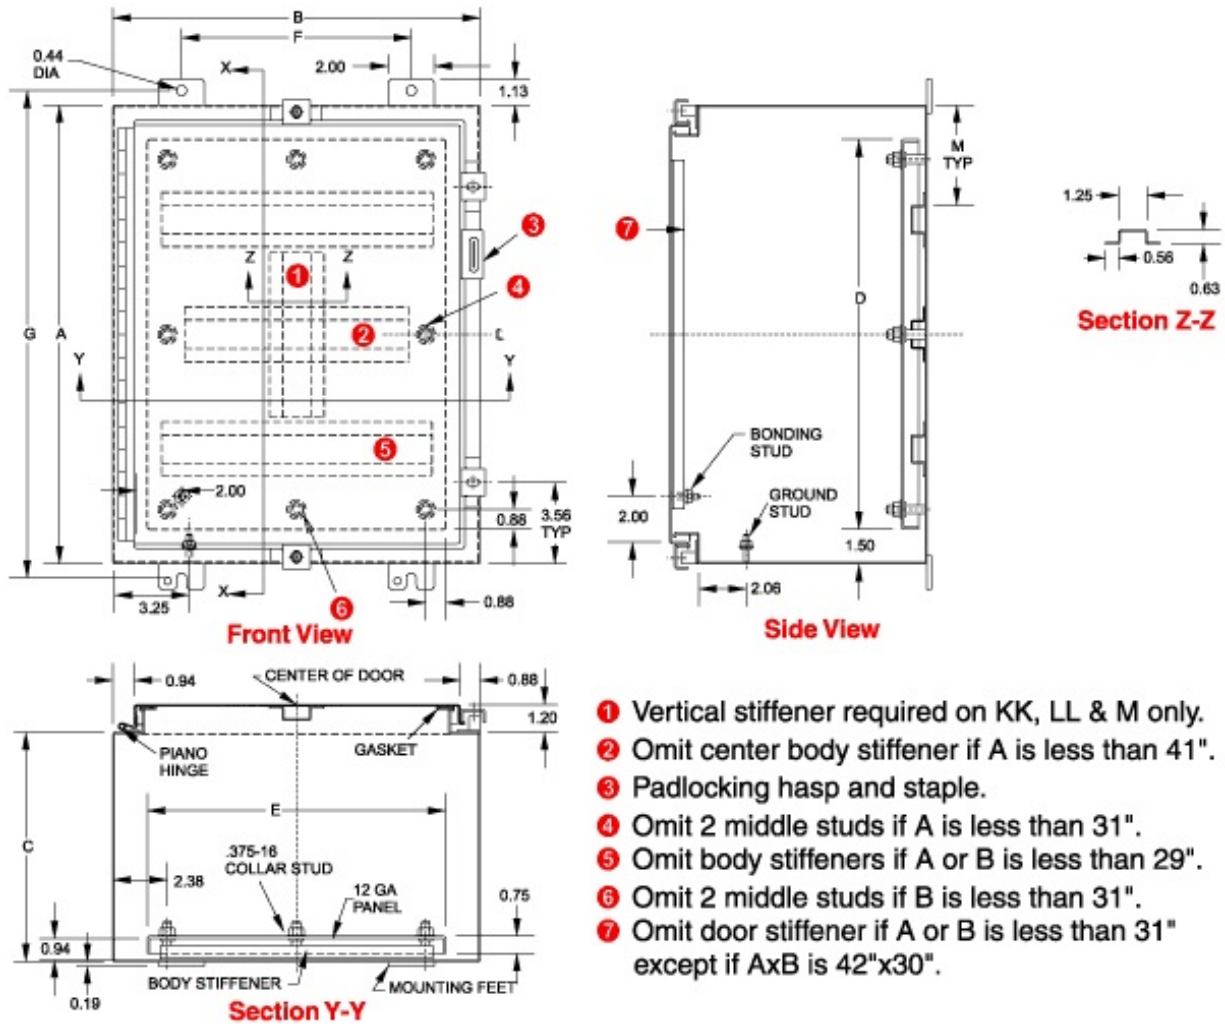

- ① Vertical stiffener required on KK, LL & M only.
- ② Omit center body stiffener if A is less than 41".
- ③ Padlocking hasp and staple.
- ④ Omit 2 middle studs if A is less than 31".
- ⑤ Omit body stiffeners if A or B is less than 29".
- ⑥ Omit 2 middle studs if B is less than 31".
- ⑦ Omit door stiffener if A or B is less than 31" except if Ax B is 42"x30".

304 S.S. Part No.	316 S.S. Part No.	A	B	C	Panel Size D E		Mounting Centers F G		Ship Wt. (lbs)
1418N4SSB6	1418N4S16B6	16.00	12.00	6.00	13.00	9.00	9.50	17.25	28
1418N4SSG6	1418N4S16G6	16.00	16.00	6.00	13.00	13.00	10.00	17.25	30
1418N4SSCR6	1418N4S16CR6	16.00	20.00	6.00	13.00	17.00	14.00	17.25	38
1418N4SSC6	1418N4S16C6	20.00	16.00	6.00	17.00	13.00	10.00	21.25	38
1418N4SSD6	1418N4S16D6	20.00	20.00	6.00	17.00	17.00	14.00	21.25	40
1418N4SSE6	1418N4S16E6	24.00	20.00	6.00	21.00	17.00	14.00	25.25	61
1418N4SSJ6	1418N4S16J6	24.00	24.00	6.00	21.00	21.00	18.00	25.25	65
1418N4SSB8	1418N4S16B8	16.00	12.00	8.00	13.00	9.00	9.50	17.25	32
1418N4SSC8	1418N4S16C8	20.00	16.00	8.00	17.00	13.00	10.00	21.25	38
1418N4SSD8	1418N4S16D8	20.00	20.00	8.00	17.00	17.00	14.00	21.25	52
1418N4SSER8	1418N4S16ER8	20.00	24.00	8.00	17.00	21.00	18.00	21.25	61

<b>1418N4SSH8</b>	<b>1418N4S16H8</b>	24.00	16.00	8.00	21.00	13.00	10.00	25.25	61
<b>1418N4SSE8</b>	<b>1418N4S16E8</b>	24.00	20.00	8.00	21.00	17.00	14.00	25.25	61
<b>1418N4SSJ8</b>	<b>1418N4S16J8</b>	24.00	24.00	8.00	21.00	21.00	18.00	25.25	75
<b>1418N4SSKR8</b>	<b>1418N4S16KR8</b>	24.00	30.00	8.00	21.00	27.00	24.00	25.25	89
<b>1418N4SSF8</b>	<b>1418N4S16F8</b>	30.00	20.00	8.00	27.00	17.00	14.00	31.25	72
<b>1418N4SSK8</b>	<b>1418N4S16K8</b>	30.00	24.00	8.00	27.00	21.00	18.00	31.25	89
<b>1418N4SSKK8</b>	<b>1418N4S16KK8</b>	30.00	30.00	8.00	27.00	27.00	24.00	31.25	100
<b>1418N4SSL8</b>	<b>1418N4S16L8</b>	36.00	24.00	8.00	33.00	21.00	18.00	37.25	100
<b>1418N4SSM8</b>	<b>1418N4S16M8</b>	36.00	30.00	8.00	33.00	27.00	24.00	37.25	121
<b>1418N4SSP8<sup>1</sup></b>	<b>1418N4S16P8<sup>1</sup></b>	42.00	36.00	8.00	39.00	33.00	30.00	43.25	177
<b>1418N4SSS8<sup>1</sup></b>	<b>1418N4S16S8<sup>1</sup></b>	48.00	36.00	8.00	45.00	33.00	30.00	49.25	207
<b>1418N4SSC10</b>	<b>1418N4S16C10</b>	20.00	16.00	10.00	17.00	13.00	10.00	21.25	47
<b>1418N4SSE10</b>	<b>1418N4S16E10</b>	24.00	20.00	10.00	21.00	17.00	14.00	25.25	66
<b>1418N4SSK10</b>	<b>1418N4S16K10</b>	30.00	24.00	10.00	27.00	21.00	18.00	31.25	120
<b>1418N4SSL10</b>	<b>1418N4S16L10</b>	36.00	24.00	10.00	33.00	21.00	18.00	37.25	108
<b>1418N4SSM10</b>	<b>1418N4S16M10</b>	36.00	30.00	10.00	33.00	27.00	24.00	37.25	125
<b>1418N4SSO10<sup>1</sup></b>	<b>1418N4S16O10<sup>1</sup></b>	42.00	30.00	10.00	39.00	27.00	24.00	43.25	175
<b>1418N4SSS10<sup>1</sup></b>	<b>1418N4S16S10<sup>1</sup></b>	48.00	36.00	10.00	45.00	33.00	30.00	49.25	215
<b>1418N4SSJ12</b>	<b>1418N4S16J12</b>	24.00	24.00	12.00	21.00	21.00	18.00	25.25	71
<b>1418N4SSK12</b>	<b>1418N4S16K12</b>	30.00	24.00	12.00	27.00	21.00	18.00	31.25	95
<b>1418N4SSM12</b>	<b>1418N4S16M12</b>	36.00	30.00	12.00	33.00	27.00	24.00	37.25	136
<b>1418N4SLL12<sup>1</sup></b>	<b>1418N4S16LL12<sup>1</sup></b>	36.00	36.00	12.00	33.00	33.00	30.00	37.25	202
<b>1418N4SSS12<sup>1</sup></b>	<b>1418N4S16S12<sup>1</sup></b>	48.00	36.00	12.00	45.00	33.00	30.00	49.25	225
<b>1418N4SST12<sup>1</sup></b>	<b>1418N4S16T12<sup>1</sup></b>	60.00	36.00	12.00	57.00	33.00	30.00	61.25	270
<b>1418N4SSK16</b>	<b>1418N4S16K16</b>	30.00	24.00	16.00	27.00	21.00	18.00	31.25	100
<b>1418N4SSM16</b>	<b>1418N4S16M16</b>	36.00	30.00	16.00	33.00	27.00	24.00	37.25	149
<b>1418N4SSS16<sup>1</sup></b>	<b>1418N4S16S16<sup>1</sup></b>	48.00	36.00	16.00	45.00	33.00	30.00	49.25	290
<b>1418N4SST16<sup>1</sup></b>	<b>1418N4S16T16<sup>1</sup></b>	60.00	36.00	16.00	57.00	33.00	30.00	61.25	280

<sup>1</sup> Does not meet JIC requirements.

*Data subject to change without notice.*

© 2013. Hammond Manufacturing Ltd. All rights reserved.