

Friction Header

SPECIFICATIONS

Mechanical

Contact Retention Force: 1.36Kgf min.

Electrical

Voltage Rating: 250V

Current Rating: 4.0A per pin

Dielectric Withstanding Voltage: 750V AC

Insulation Resistance: 1000MΩ min.

Physical


Housing: Thermoplastic, UL 94V-0 rating in ivory color

Contact: Copper alloy


Plating: See "ORDERING INFORMATION"

Operating Temperature: -40 to +105

HF18 Series
Friction R/A Type
2.54mm [.100"] Pitch




DRAWING

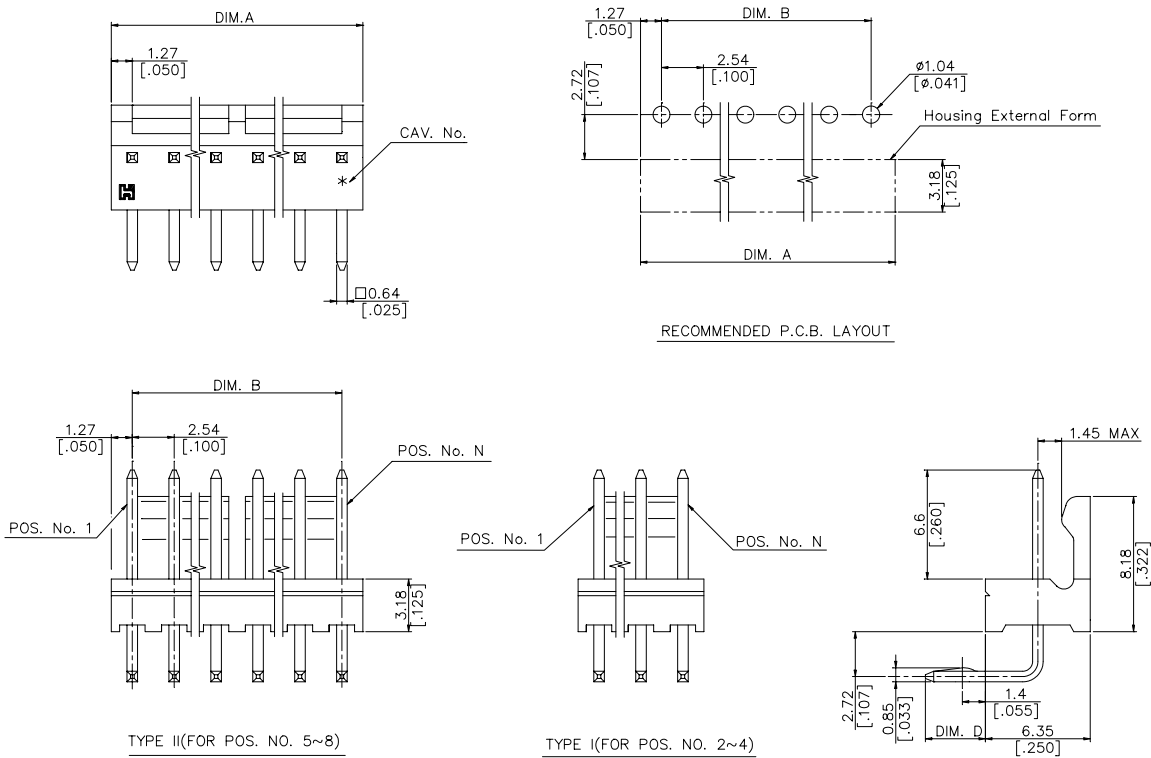

ORDERING INFORMATION

PRODUCT No. : H F 18 * * * - * *

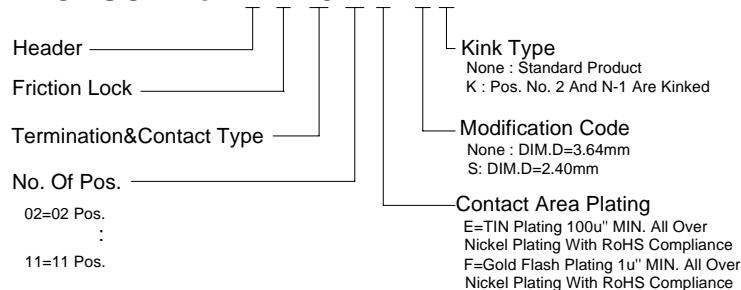

PART NO.	DIM. A	DIM. B	TYPE
HF1808* **	20.32 [0.800]	17.78 [0.700]	II
HF1807* **	17.78 [0.700]	15.24 [0.600]	II
HF1806* **	15.24 [0.600]	12.70 [0.500]	II
HF1805* **	12.70 [0.500]	10.16 [0.400]	II
HF1804* **	10.16 [0.400]	7.62 [0.300]	I
HF1803* **	7.62 [0.300]	5.08 [0.200]	I
HF1802* **	5.08 [0.200]	2.54 [0.100]	I